



# MB1F-12 thru MB10F-12

## SURFACE MOUNT BRIDGE RECTIFIERS

### FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Reverse voltage: 100V to 1000V
- ◆ Forward current: 1.2A
- ◆ High surge current capability

### PINNING

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

### MECHANICAL DATA

- ◆ Case: MBF molded plastic body
- ◆ Terminals:Solderable per MIL-STD-750,Method 2026
- ◆ Weight: Approximated 0.075grams

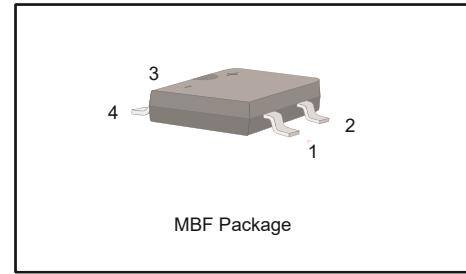

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	MB1F-12	MB2F-12	MB4F-12	MB6F-12	MB8F-12	MB10F-12	UNIT
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T <sub>c</sub> = 125 °C	I <sub>F(AV)</sub>	1.2						A
Peak Forward Surge Current (Note1)	I <sub>FSM</sub>	40						A
Maximum Forward Voltage at 1.2 A	V <sub>F</sub>	1.1						V
Maximum DC Reverse Current at Rated DC Blocking Voltage T <sub>A</sub> =25°C T <sub>A</sub> =125°C	I <sub>R</sub>	5 80						µA
Typical Junction Capacitance (Note2)	C <sub>J</sub>	18						pF
Typical Thermal Resistance (Note3)	R <sub>θJA</sub> R <sub>θJC</sub>	75 22						°C/W
Operating and Storage Temperature Range	T <sub>J</sub> ,T <sub>STG</sub>	-55 to +150						°C

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured at 1MHz and applied reverse voltage of 4 V D.C.

3. Mounted on glass epoxy PC board with 1.5"×1.5" (3.81×3.81 cm) copper pad .



# MB1F-12 thru MB10F-12 SURFACE MOUNT BRIDGE RECTIFIERS

## RATINGS AND CHARACTERISTIC CURVES

Fig.1 Average Rectified Output Current Derating Curve

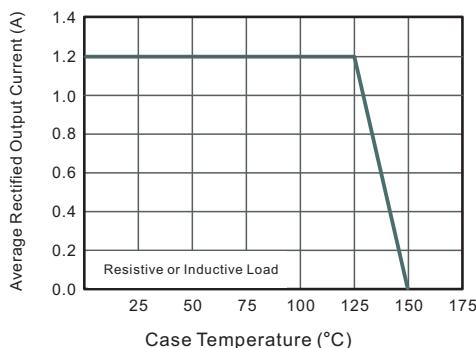


Fig.2 Typical Reverse Characteristics

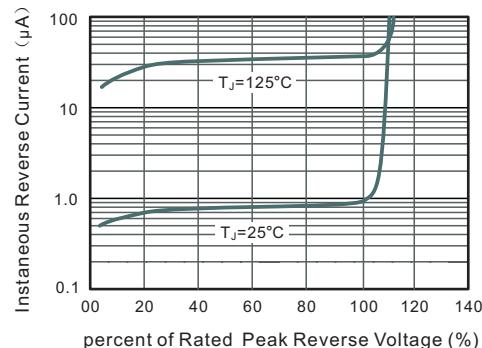


Fig.3 Typical Instantaneous Forward Characteristics

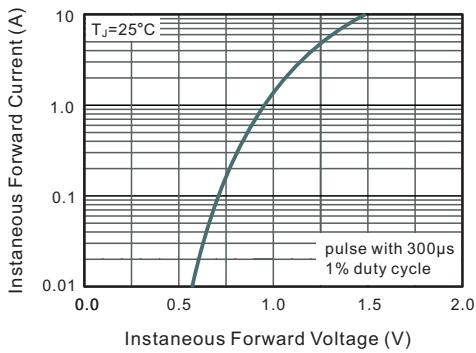


Fig.4 Typical Junction Capacitance


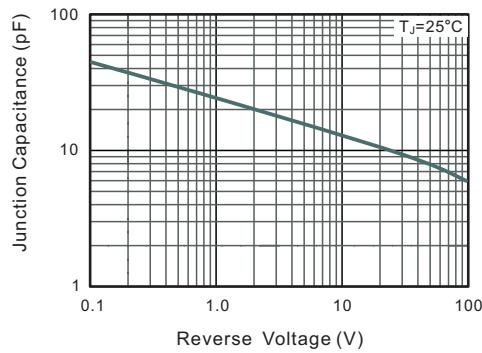


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



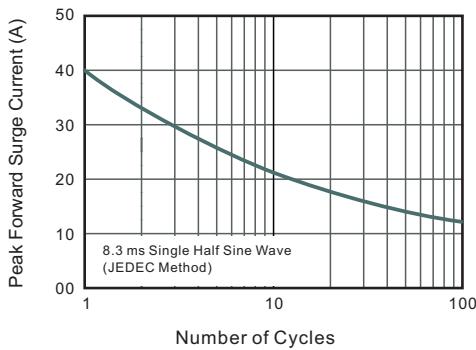


# MB1F-12 thru MB10F-12

## SURFACE MOUNT BRIDGE RECTIFIERS

### PACKAGE OUTLINE

MBF

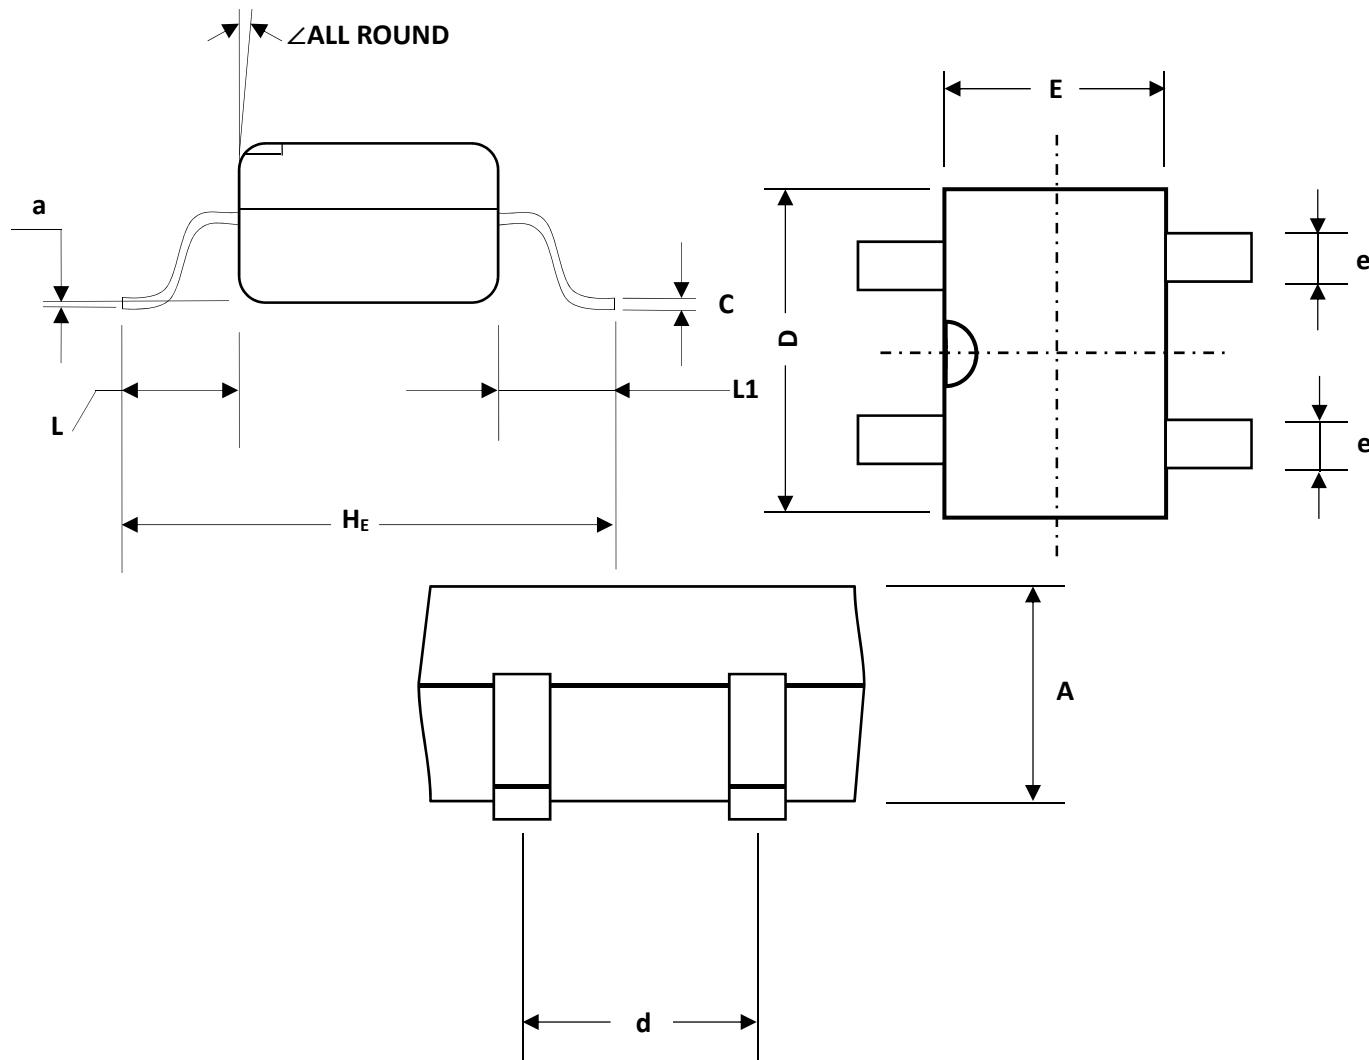

MBF mechanical data

UNIT		A	C	D	E	H <sub>E</sub>	d	e	L	L <sub>1</sub>	a	∠
mm	max	1.6	0.22	5.0	4.1	7.0	2.7	0.8	1.7	1.1	0.2	7°
	min	1.2	0.15	4.5	3.6	6.4	2.3	0.5	1.3	0.5	—	
mil	max	63	8.7	197	161	276	106	31	67	43	8	7°
	min	47	5.9	177	142	252	91	20	51	20	—	

### ORDERING INFORMATION

Device	Package	Shipping
MB1F-12 thru MB10F-12	MBF	3,000/Tape & Reel (11 inches)
		5,000/Tape & Reel (13 inches)