

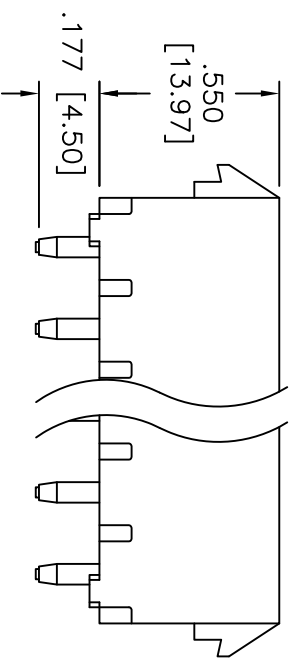
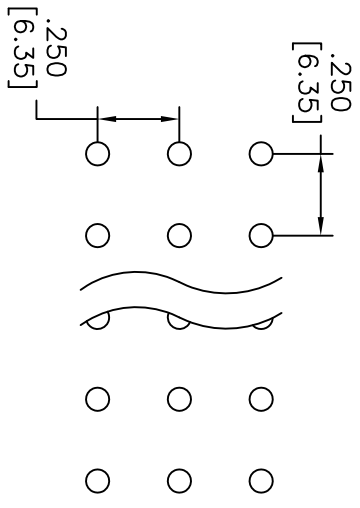


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/28/10	

APPROVED: _____
 DATE: _____ TITLE: _____

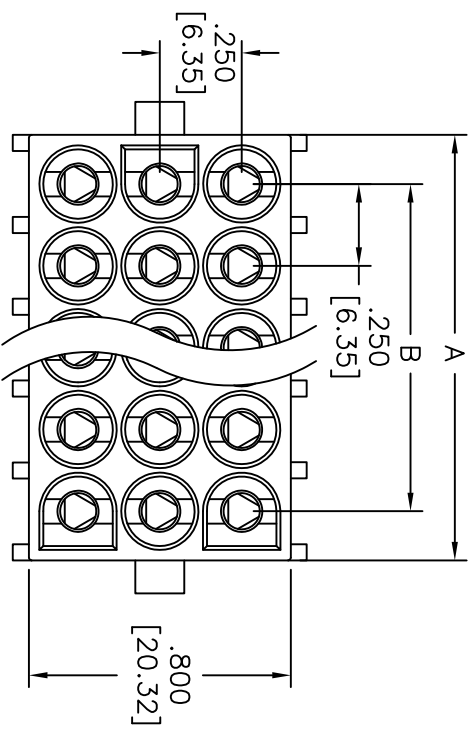

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall
 Electrical: Current rating: 11 Amps max.
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 5000 VAC for 1 minute
 Mechanical: Temperature Rating: Operating temperature: 0°C to +85°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Positions: 6, 9, 12, 15
 A = .250 [6.35] X No. of Positions per row + .050 [1.27]
 B = .250 [6.35] X No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

WIRE TO BOARD, FEMALE, 6.35mm PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		TITLE	
.X ± .10	ØX ± .10	WIRE TO BOARD, FEMALE, 6.35mm PITCH	
.XX ± .020	ØXX ± .015	909 Rahway Avenue, Union, NJ 07083	
.XXX ± .015	ØXXX ± .010	Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS	DATE	PART NO. DMF-XX-S-SQ-V0	
DRAWN DY	10/28/10	SIZE X	
CHECKED		SCALE: NTS	
APPROVED		SHEET 1 OF 2	

