

SERIES EG1300 SWITCHES



SLIDE SWITCHES



FEATURES & BENEFITS

Tape & Reel Packaging
3-position

APPLICATIONS / MARKETS

Computer Servers/peripherals
Consumer electronics
Instrumentation
Test & measurement

MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf to center position 150 +/- 100 gf from center position
Travel:	1.5 +/- 0.1mm each position

ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +80°C

HOW TO ORDER:

SERIES


EG

MODEL



1300

ACTUATOR "L"

A = 1.5mm x 1.1 mm
B = 1.5mm x 0.40mm



SCHEMATIC

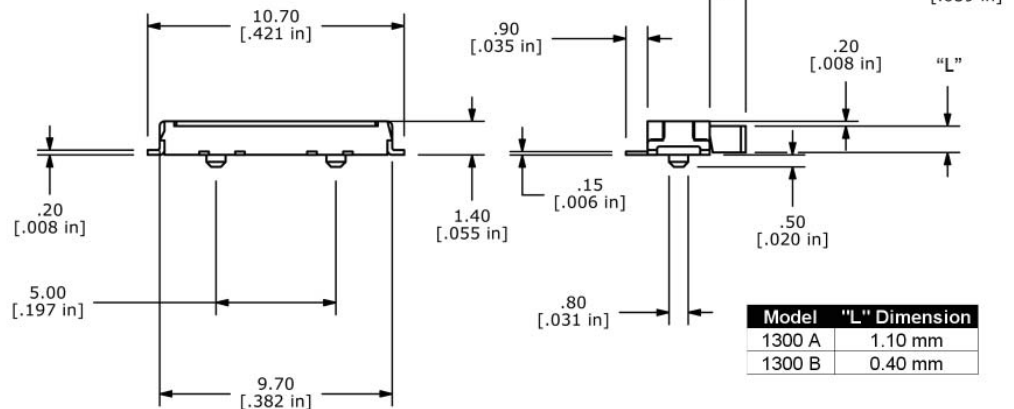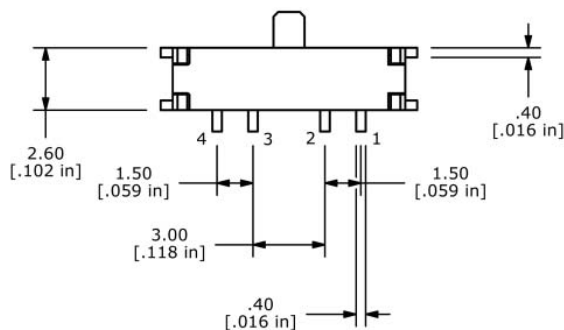

Model	"L" Dimension
1300 A	1.10 mm
1300 B	0.40 mm