

SCHEMATIC (SHORTING)

SK-23H01-GXXX


手柄
G-Switch P/N

Switch Height (mm)

G020=2.0	G030=3.0
G040=4.0	G050=5.0
G055=5.5	G060=6.0
G065=6.5	G070=7.0
G075=7.5	G080=8.0
G085=8.5	G090=9.0
G095=9.5	G100=10.0

G-Switch Specification:

- Electrical Specifications: 1.0A/DC24V
- Contact resistance (CR): ≤50mΩ
- Insulation Resistance(IR): ≥100MΩ DC250V
- Compressive strength (WV): AC250V 1minute
- Operating temperature: -25°C~+70°C
- Storage humidity: <85%RH
- Electrical life: 10,000Cycles.

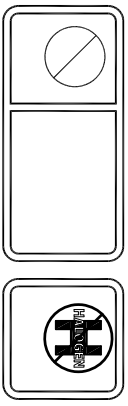

G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance:	±0.30	DESIGN	Bright Lee	DATE	2016.05.29	Mold code:	
X	±0.20	CHECKED		DATE		SK-23H01-GXXX	
X.X	±0.15	APPROVED		DATE			
X.XXX	±0.10						
Angles	±3						
		http://www.dg-switch.com		REV:	X1	SCALE:	4:1
		TEL:0769-82388879		SIZE:	A4	SHEET:	1/1