440-031
EMI/RFI Banding and Shrink Boot Adapter
Direct Coupling - Split Shell

CONNECTOR DESIGNATORS

A-B*-C-D-E-F

G-H-J-K-L-S

*** Conn. Desig. B See Note 3**

DIRECT COUPLING

440 F D 031 M 20 12 B P T

- Product Series
- Connector Designator
- Angle and Profile
  - D = Split 90°
  - F = Split 45°
- Basic Part No.
- Finish (Table II)
- Shell Size (Table I)
- Cable Entry (Table V)
- B = Band
  K = Precoiled Band
  (Omit for none)
- Polysulfide (Omit for none)
- Shrink Boot (Table V - Omit for none)

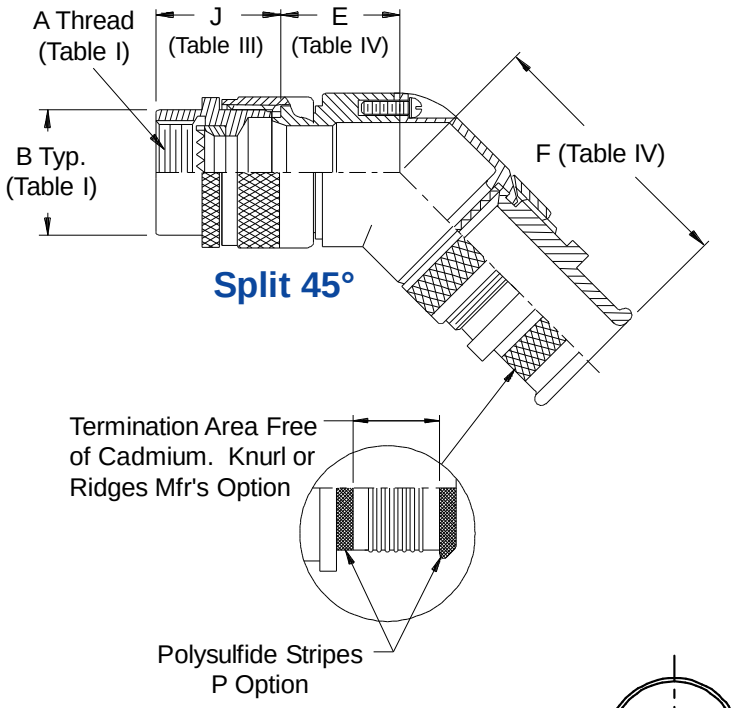

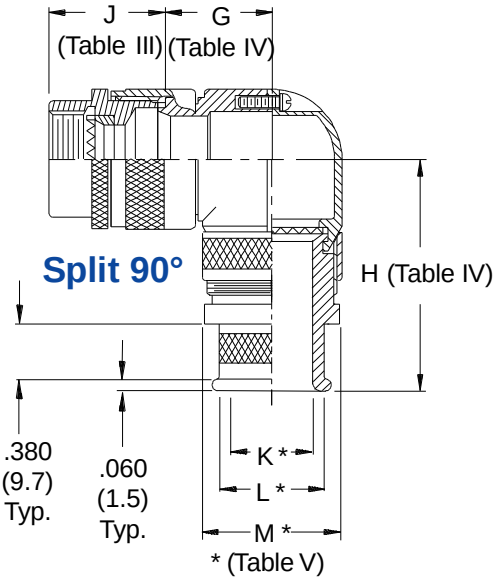



Band Option
(K Option Shown -
See Note 4)

© 2005 Glenair, Inc.

440-031
EMI/RFI Banding and Shrink Boot Adapter
Direct Coupling - Split Shell

See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: FRONT ADAPTER

Shell Size	J Max - Conn. Designator A-E-F J-H-L-S	D-B-G-K	C
08/09	1.180 (30.0)	1.250 (31.8)	
10/11	1.180 (30.0)	1.250 (31.8)	
12/13	1.180 (30.0)	1.250 (31.8)	1.735 (44.1)
14/15	1.180 (30.0)	1.250 (31.8)	1.915 (48.6)
16/17	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
18/19	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
20/21	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
22/23	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
24/25	1.380 (35.0)	1.560 (39.6)	1.915 (48.6)
28/29	1.610 (40.9)	1.560 (39.6)	1.915 (48.6)
32/33	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
36	1.610 (40.9)	1.750 (44.5)	1.915 (48.6)
40	1.610 (40.9)	2.190 (55.6)	1.915 (48.6)

TABLE IV: ELBOW DIMENSIONS

Dash No.	E Max	F Max	G Max	H Max
01	.440 (11.2)	1.635 (41.5)	.680 (17.3)	1.575 (40.0)
02	.440 (11.2)	1.635 (41.5)	.680 (17.3)	1.575 (40.0)
03	.440 (11.2)	1.635 (41.5)	.680 (17.3)	1.575 (40.0)
04	.440 (11.2)	1.635 (41.5)	.680 (17.3)	1.575 (40.0)
05	.500 (12.7)	1.695 (43.1)	.750 (19.1)	1.635 (41.5)
06	.500 (12.7)	1.695 (43.1)	.750 (19.1)	1.635 (41.5)
07	.560 (14.2)	1.765 (44.8)	.810 (20.6)	1.705 (43.3)
08	.560 (14.2)	1.765 (44.8)	.810 (20.6)	1.705 (43.3)
09	.620 (15.7)	1.795 (45.6)	.870 (22.1)	1.735 (44.1)
10	.680 (17.3)	1.895 (48.1)	.930 (23.6)	1.835 (46.6)
11	.680 (17.3)	1.895 (48.1)	.930 (23.6)	1.835 (46.6)
12	.750 (19.1)	1.955 (49.7)	1.000 (25.4)	1.895 (48.1)
13	.820 (20.8)	2.015 (51.2)	1.060 (26.9)	1.955 (49.7)
14	.820 (20.8)	2.015 (51.2)	1.060 (26.9)	1.955 (49.7)
15	.880 (22.4)	2.075 (52.7)	1.120 (28.4)	2.015 (51.2)
16	.880 (22.4)	2.075 (52.7)	1.120 (28.4)	2.015 (51.2)

TABLE V: CABLE ENTRY

Dash No.	K	L	M	Shrink Boot *
01	.125 (3.2)	.250 (6.4)	.312 (7.9)	n/a
31	.188 (4.8)	.312 (7.9)	.374 (9.5)	202K121-25-0
02	.250 (6.4)	.375 (9.5)	.437 (11.1)	202K121-25-0
32	.312 (7.9)	.438 (11.1)	.500 (12.7)	202K121-25-0
03	.375 (9.5)	.500 (12.7)	.562 (14.3)	202K121-25-0
33	.438 (11.1)	.562 (14.3)	.624 (15.8)	202K132-25-0
04	.500 (12.7)	.625 (15.9)	.687 (17.4)	202K132-25-0
34	.562 (14.3)	.688 (17.5)	.750 (19.1)	202K132-25-0
05	.625 (15.9)	.750 (19.1)	.812 (20.6)	202K132-25-0
35	.688 (17.5)	.812 (20.6)	.874 (22.2)	202K142-25-0
06	.750 (19.1)	.875 (22.2)	.937 (23.8)	202K142-25-0
36	.812 (20.6)	.938 (23.8)	1.000 (25.4)	202K153-25-0
07	.875 (22.2)	1.000 (25.4)	1.062 (27.0)	202K153-25-0
37	.938 (23.8)	1.062 (27.0)	1.124 (28.5)	202K153-25-0
08	1.000 (25.4)	1.125 (28.6)	1.187 (30.1)	202K153-25-0
38	1.062 (27.0)	1.188 (30.2)	1.250 (31.8)	202K163-25-0
09	1.125 (28.6)	1.250 (31.8)	1.312 (33.3)	202K163-25-0
10	1.250 (31.8)	1.375 (34.9)	1.437 (36.5)	202K163-25-0
11	1.375 (34.9)	1.500 (38.1)	1.562 (39.7)	202K174-25-0
12	1.500 (38.1)	1.625 (41.3)	1.687 (42.8)	202K174-25-0
13	1.625 (41.3)	1.750 (44.5)	1.812 (46.0)	202K174-25-0
14	1.750 (44.5)	1.875 (47.6)	1.937 (49.2)	202K185-25-0
15	1.875 (47.6)	2.000 (50.8)	2.062 (52.4)	202K185-25-0
16	2.000 (50.8)	2.125 (54.0)	2.187 (55.5)	202K185-25-0

* Raychem Shrink Boot Supplied with "T" Option (see Part Number Development)

1. Metric dimensions (mm) are indicated in parentheses.
2. See page 40 for Shrink Boot Reference Information.
3. When using Connector Designator B refer to pages 18 and 19 for part number development.
4. Backshells supplied with 600-052-* band, see Glenair Series 600 Tool Catalog for installation.

© 2005 Glenair, Inc.