

DETAILS


Product Number	C13526_MINNIE-XW
Family	Minnie
Type	Reflector
Color	white
Diameter	32,4 mm
Height	14,75 mm
Style	round
Optic Material	HRPC
Holder Material	
Fastening	glue
Status	production ready
ROHS Compliant	Yes
Date Updated	25/09/2014




OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
XHP70	91 deg	WWW-class	93 %	0.430	-
MHD-E/G	89 deg	WWW-class	83 %	0.410	-
LUXEON M/MX	90 deg	WWW-class	92 %	0.500	-
Duris S10	86 deg	WWW-class	92 %	0.500	-
Duris P10	130 deg	WWW-class	-	-	-

Relative intensity of C13526_MINNIE-XW-(LuxM)

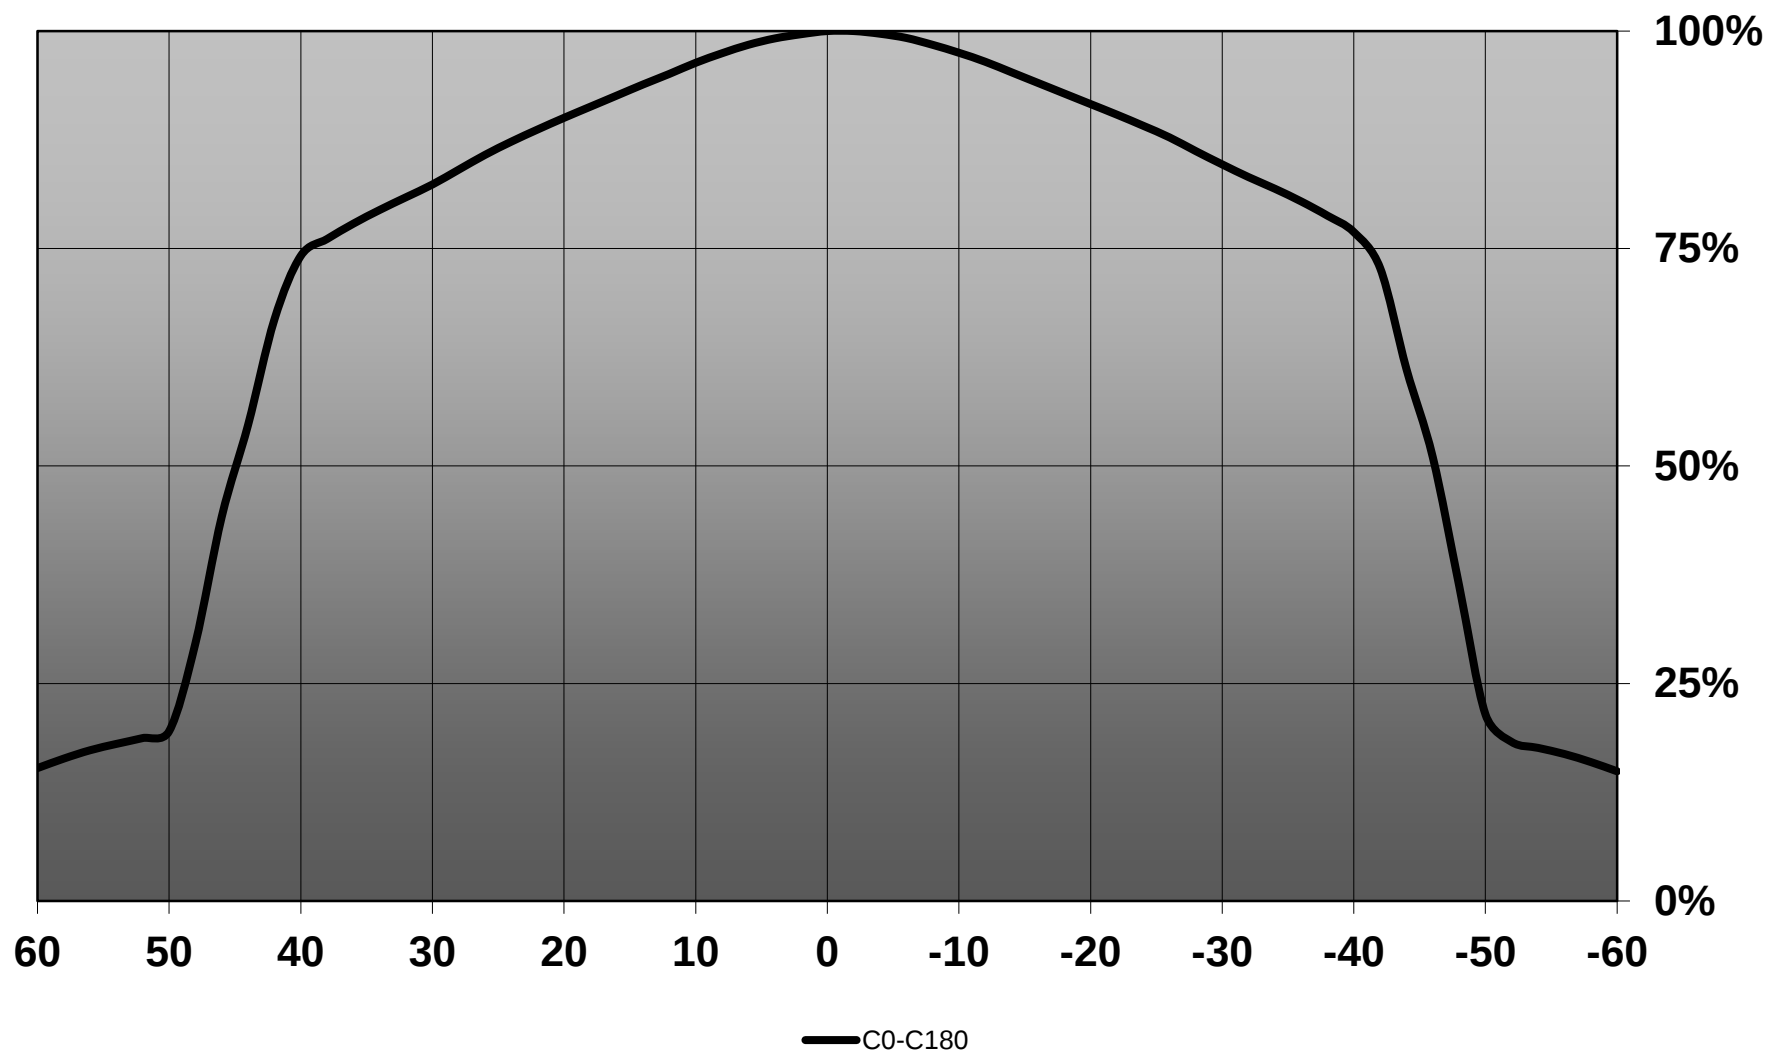


Relative intensity of C13526_MINNIE-XW_(Duris_S10)

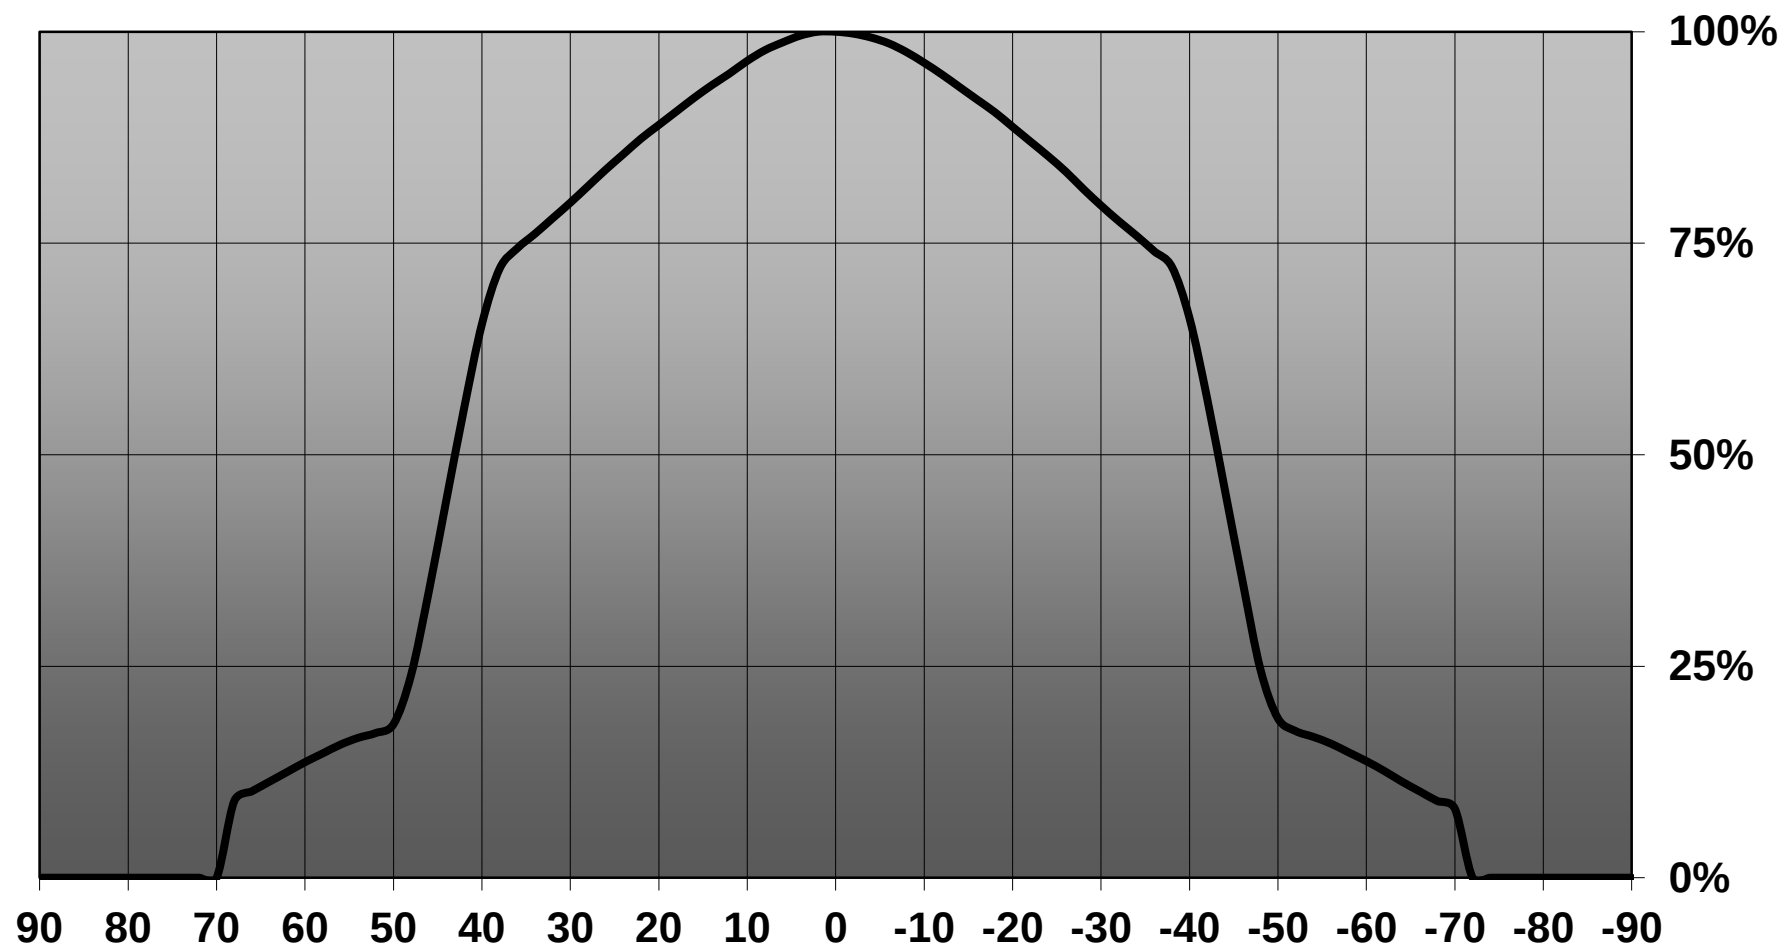


4


4

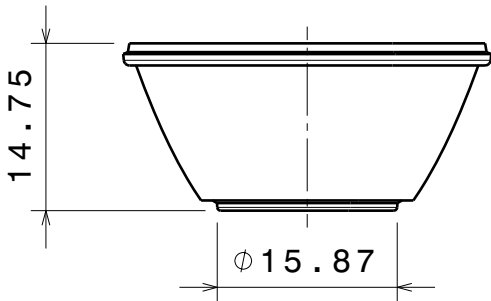

Front view

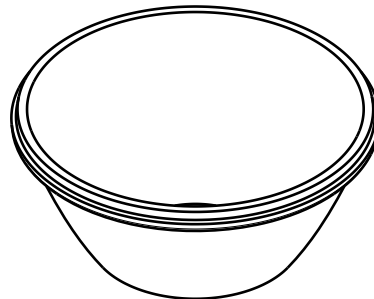

Isometric view

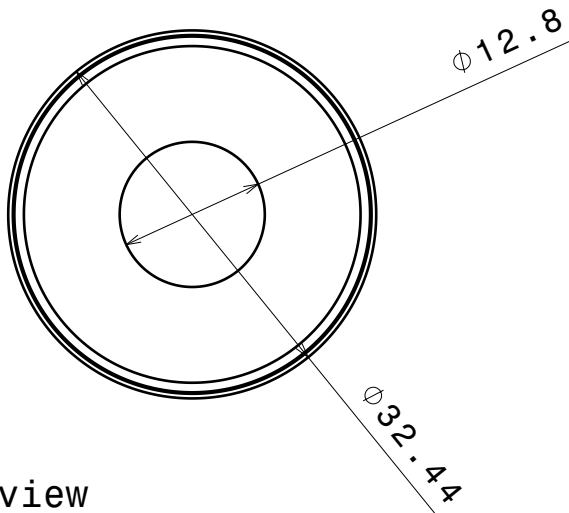

Top view

3

3

2

2


INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C13526	MINNIE-XW	PC	white

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures: class M
According to DIN ISO 2768-2
Form and position: class L

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:



DRAWING TITLE

C13526_MINNIE-XW

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy.

SIZE

A4

PART NUMBER

C13526

SCALE

3:2

WEIGHT

1,86 g

SHEET

1 / 1


D

A


1

1

Luminaire: Ledil C13526_MINNIE-XW_(Cree_XHP70)
Lamps: 1 x Cree_XHP70_289.849lm@250mA_P=1.255325W_I=0.25A

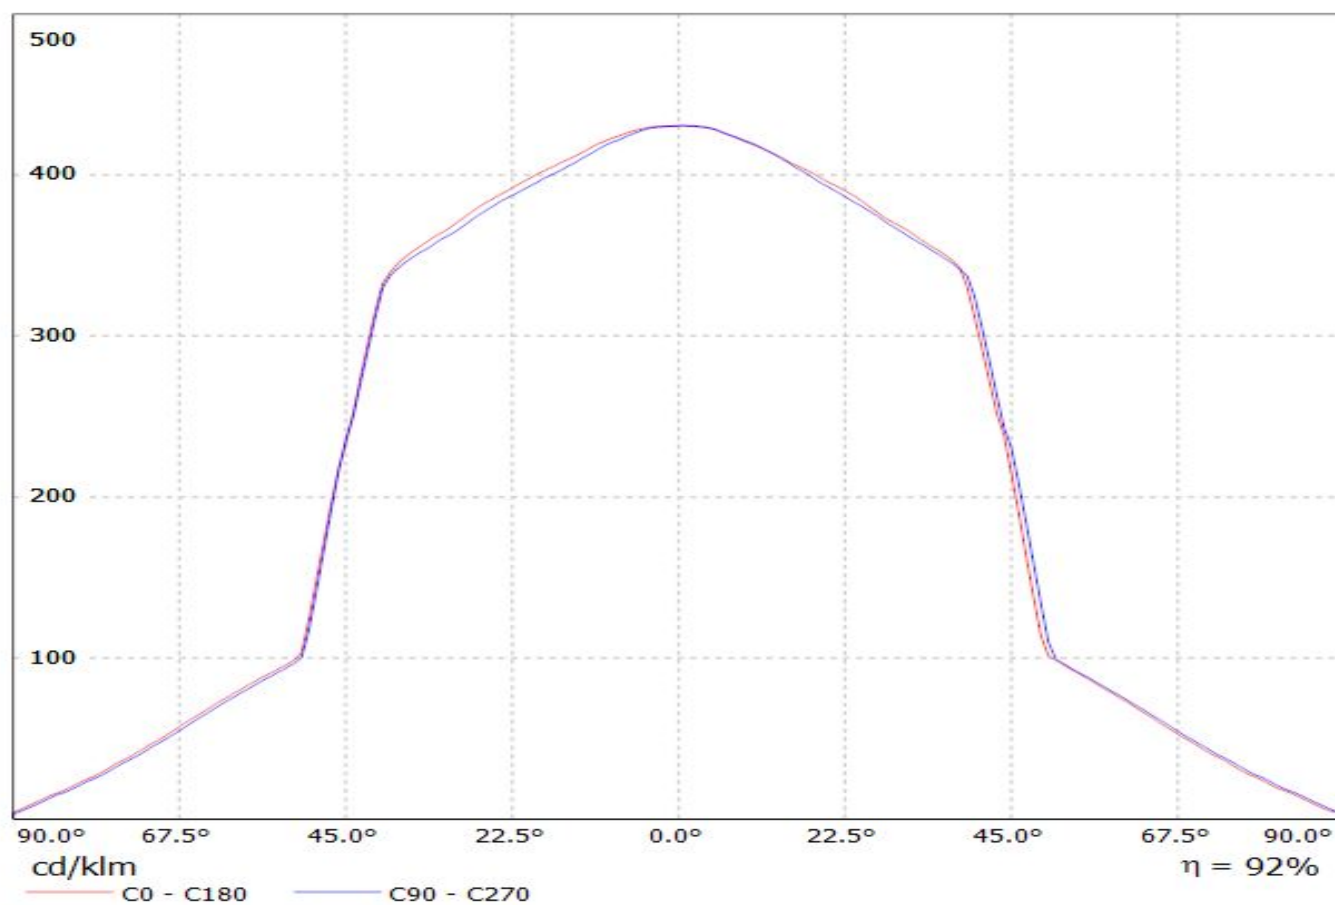


Luminaire: Ledil C13526_MINNIE-XW_(MHD-G)
Lamps: 1 x MHD-G_528.9lm@100mA_P=3.0W_I=0.100A

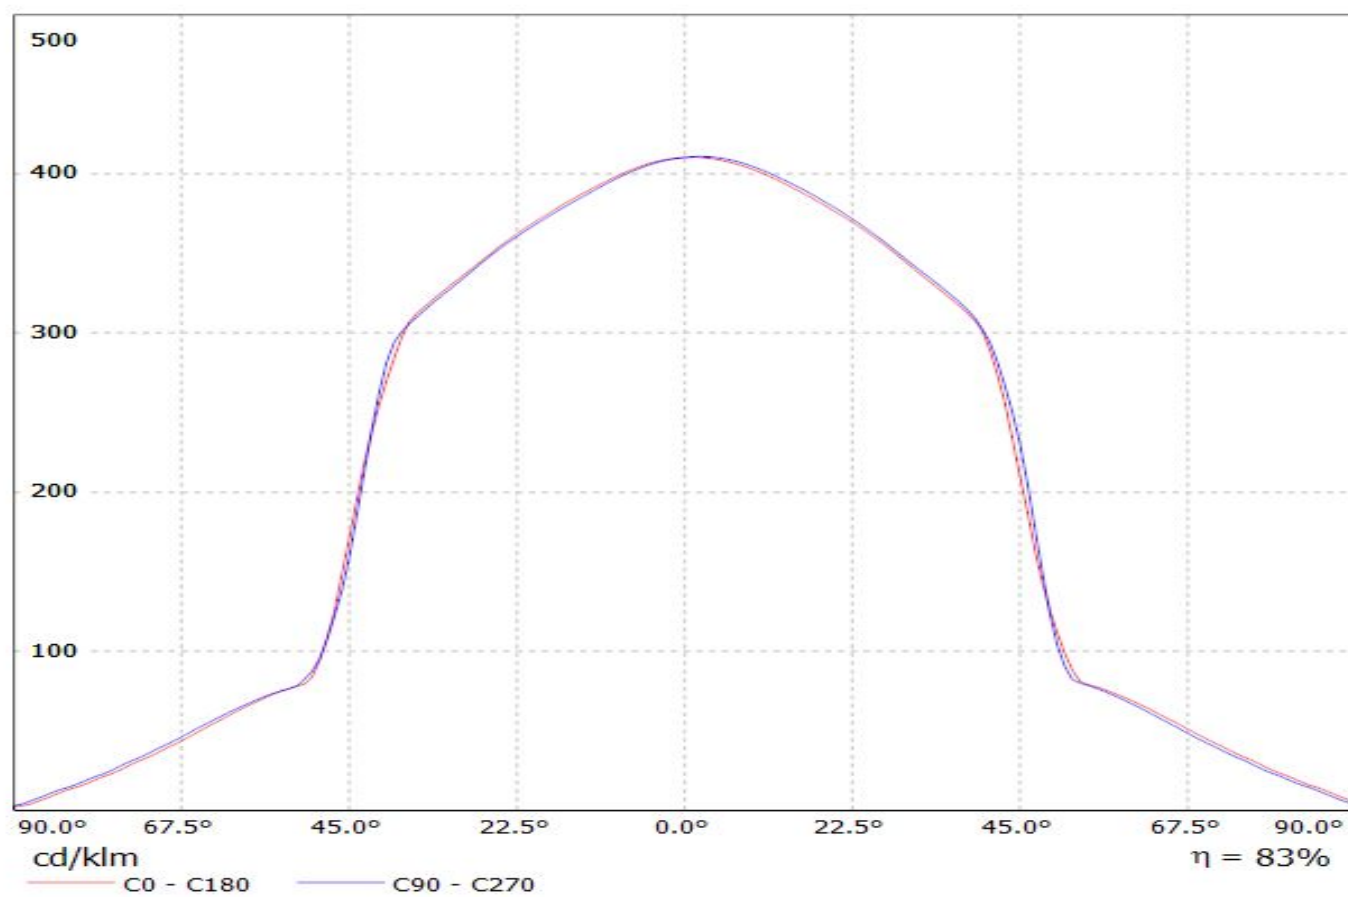


Luminaire: Ledil C13526_MINNIE-XW_(Cree_XHP70)

Lamps: 1 x Cree_XHP70_289.849lm@250mA_P=1.255325W_I=0.25A

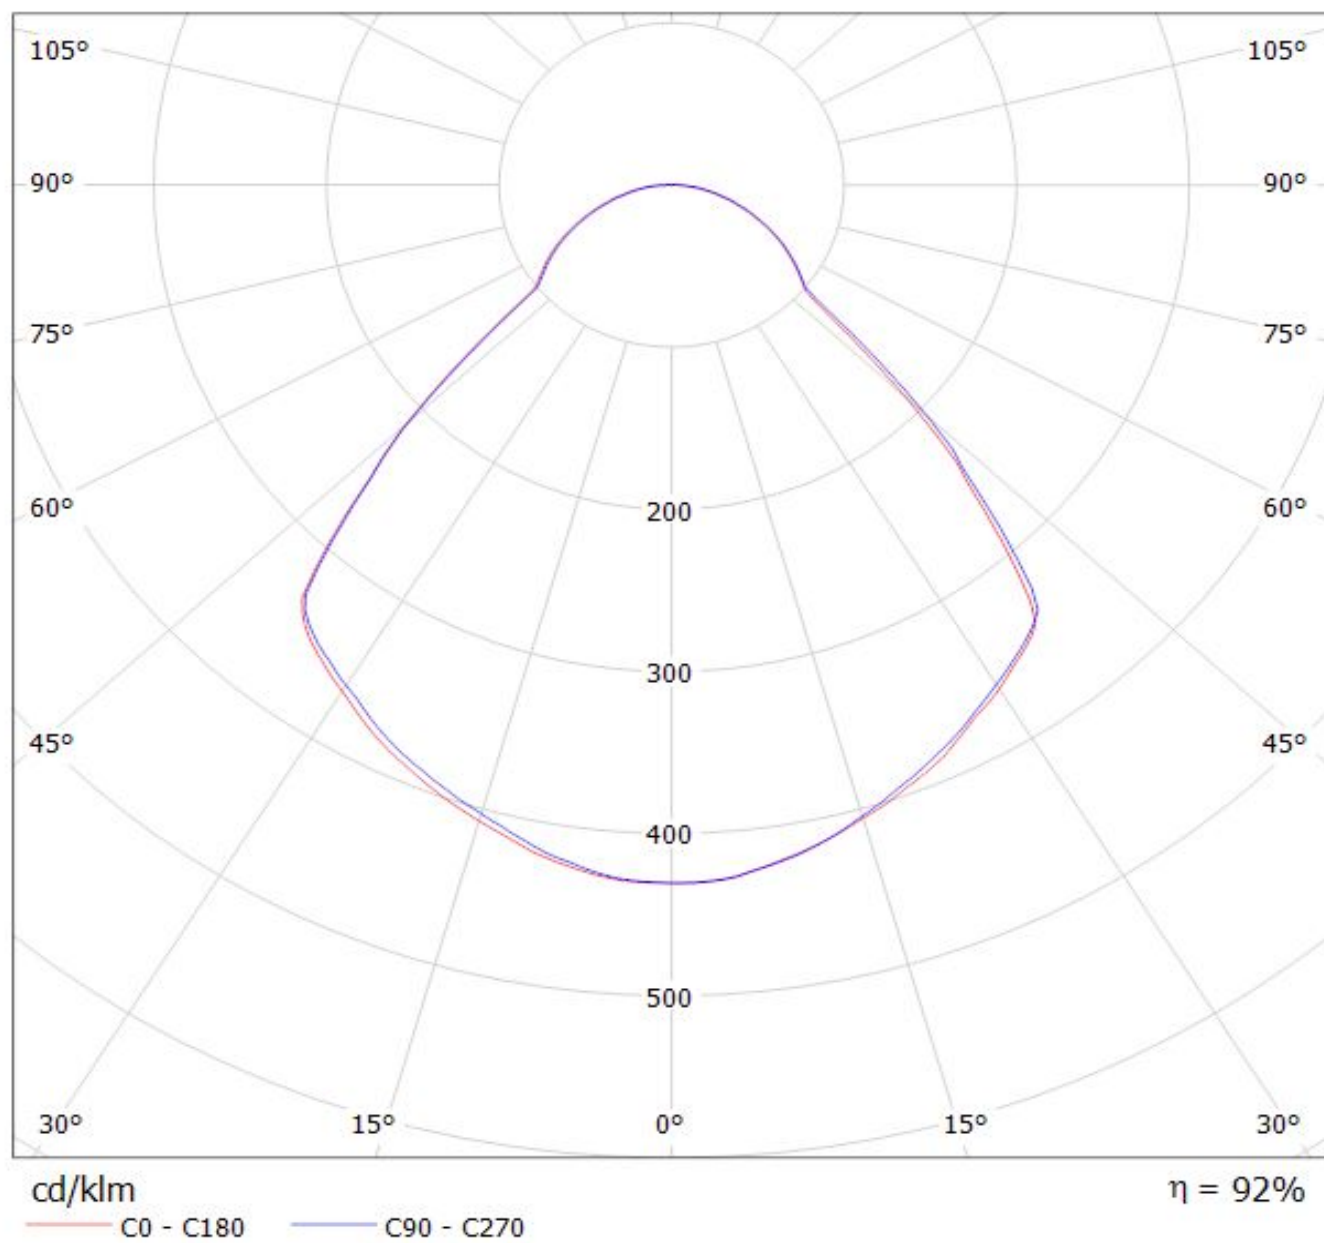

Luminaire: Ledil C13526_MINNIE-XW_(MHD-G)
Lamps: 1 x MHD-G_528.91lm@100mA_P=3.0W_I=0.100A

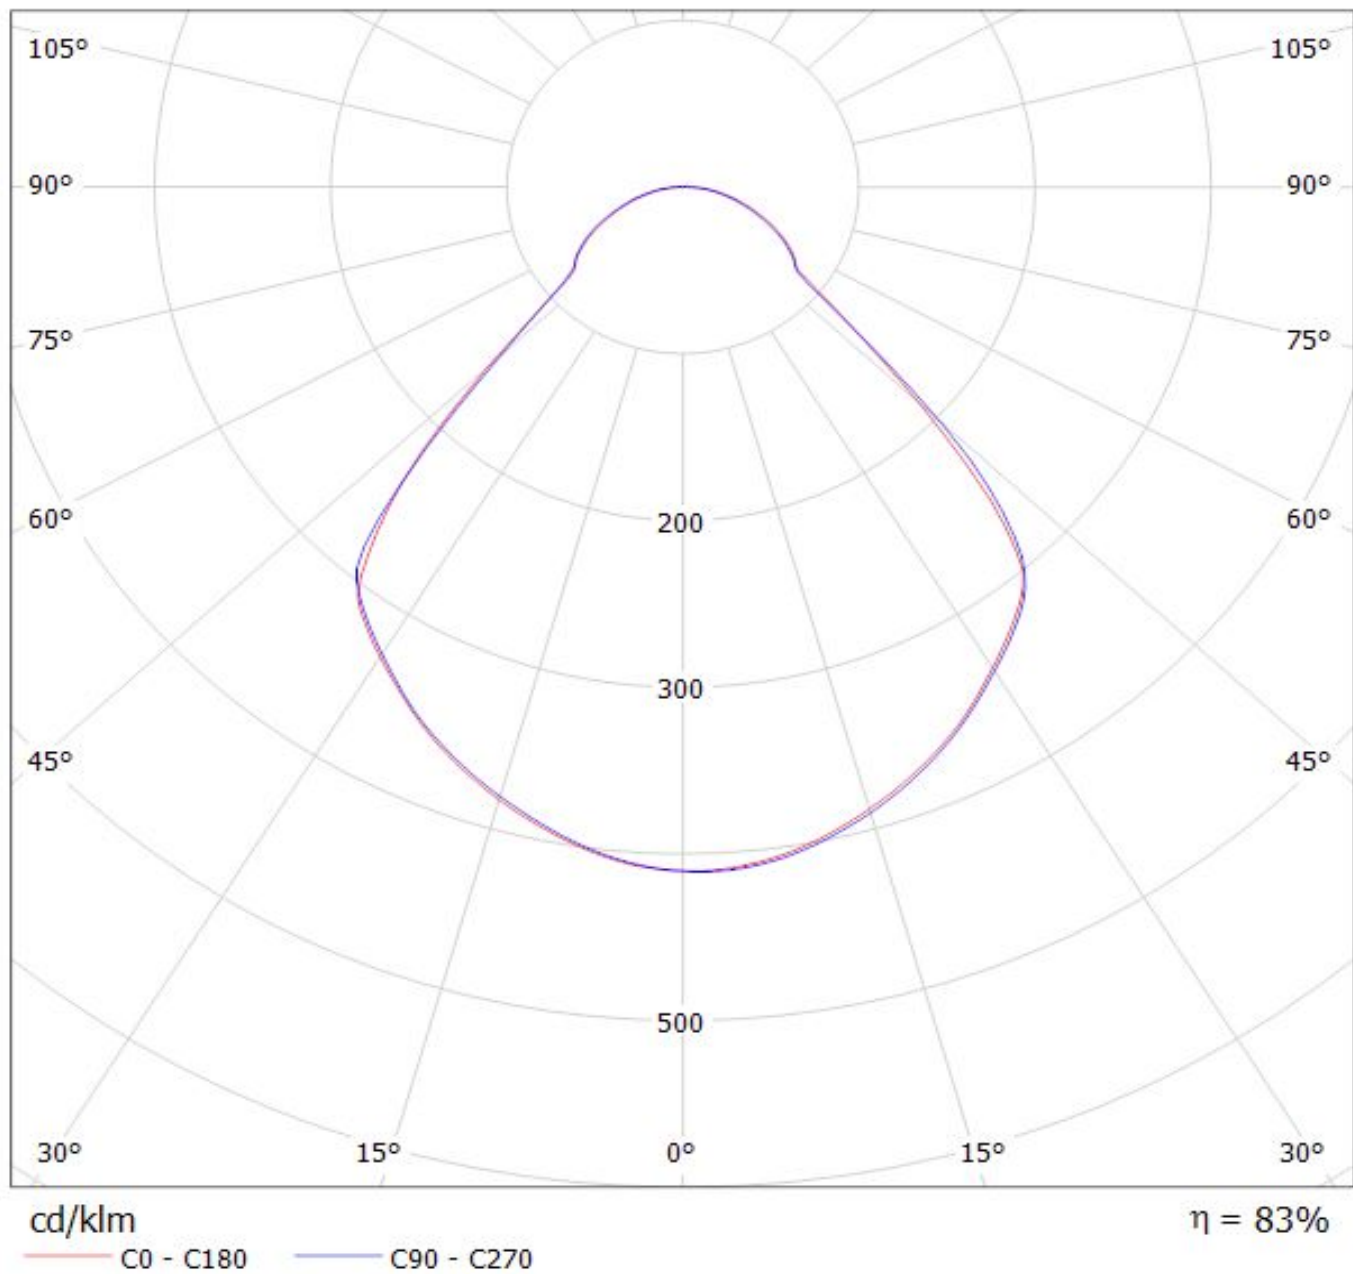

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.