LM317AHV

3-Terminal Positive Adjustable Regulator


Features

- Output Current in Excess of 1.5A
- Output Adjustable Between 1. 2V and 57V
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting
- Output Transistor Safe Area Compensation
- TO-220 Package

Description


This monolithic integrated circuit is an adjustable 3-terminal positive voltage regulator designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 57V. It employs internal current limiting, thermal shut down and safe area compensation.

TO-220



1. Adj 2. Output 3. Input

Internal Block Diagram

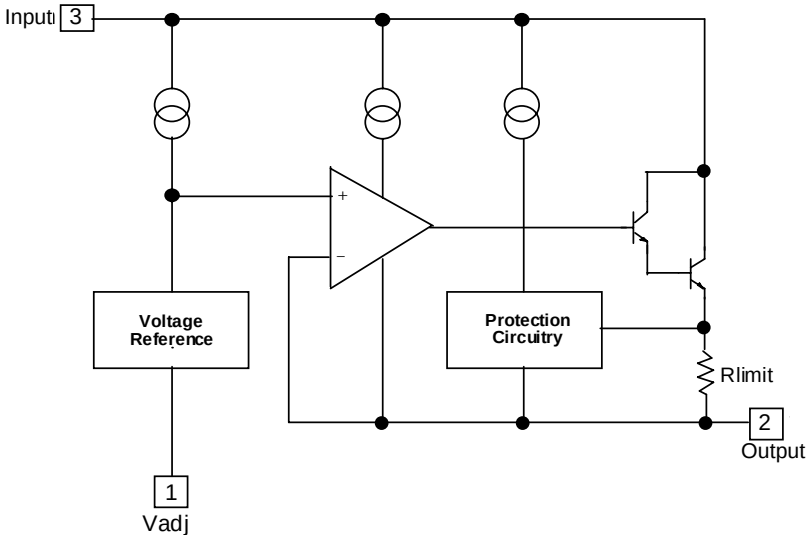

©2009 Fairchild Semiconductor Corporation

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input-Output Voltage Differential	V_I - V_O	60	V
Lead Temperature	T_{LEAD}	230	°C
Power Dissipation	P_D	Internally limited	W
Operating Junction Temperature Range	T_j	0 ~ +125	°C
Storage Temperature Range	T_{STG}	-65 ~ +125	°C
Temperature Coefficient of Output Voltage	$\Delta Vo/\Delta T$	±0.02	%/°C

Electrical Characteristics

(V_I-V_O=5V, I_O= 0.5A, 0°C ≤ T_J ≤ + 125°C, I_{MAX} = 1.5A, P_{DMAX} = 20W, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Line Regulation (Note1)	Rline	T_A = +25°C 3V ≤ V_I - V_O ≤ 60V	-	0.01	0.04	%/V
		3V ≤ V_I - V_O ≤ 60V	-	0.02	0.07	%/V
Load Regulation (Note1)	Rload	T_A = +25°C, 10mA ≤I_O ≤I_{MAX} V_O< 5V V_O ≥ 5V	-	18 0.4	25 0.5	mV %/V_O
		10mA ≤ I_O ≤ I_{MAX} V_O < 5V V_O ≥ 5V	-	40 0.8	70 1.5	mV %/V_O
Adjustable Pin Current	I_{ADJ}	-	-	46	100	μA
Adjustable Pin Current Change	ΔI_{ADJ}	3V ≤ V_I - V_O ≤60V 10mA ≤ I_O ≤ I_{MAX}, P_D ≤ P_{MAX}	-	2.0	5	μA
Reference Voltage	V_{REF}	3V ≤ V_{IN} - V_O ≤60V 10mA ≤ I_O ≤ I_{MAX}, P_D ≤ P_{MAX}	1.20	1.25	1.30	V
Temperature Stability	ST_T	-	-	0.7	-	%/V_O
Minimum Load Current to Maintain Regulation	$I_{L(MIN)}$	V_I - V_O = 60V	-	3.5	12	mA
Maximum Output Current	$I_{O(MAX)}$	V_I - V_O ≤ 15V, P_D ≤ P_{MAX} V_I - V_O ≤ 60V, P_D ≤ P_{MAX} T_A = 25°C	1.0	2.2 0.3	-	A
RMS Noise, % of V_{OUT}	e_N	T_A= +25°C, 10Hz ≤ f ≤ 10kHz	-	0.003	0.01	%/V_O
Ripple Rejection	RR	V_O = 10V, f = 120Hz without C_{ADJ} C_{ADJ} = 10μF (Note2)	66	60 75	-	dB
Long-Term Stability, T_J = T_{HIGH}	ST	T_A = +25°C for end point measurements, 1000HR	-	0.3	1	%
Thermal Resistance Junction to Case	$R_{\theta JC}$	-	-	5	-	°C/W

Note :

1. Load and line regulation are specified at constant junction temperature. Change in V_D due to heating effects must be taken into account separately. Pulse testing with low duty is used. (P_{MAX} = 20W)
2. C_{ADJ}, when used, is connected between the adjustment pin and ground.

Typical Performance Characteristics

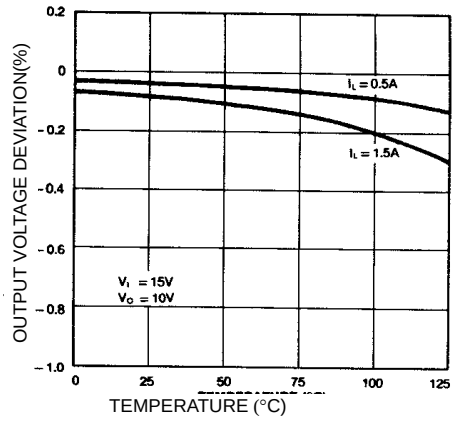


Figure 1. Load Regulation

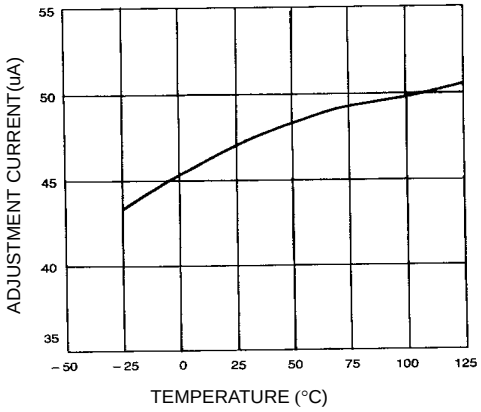


Figure 2. Adjustment Current

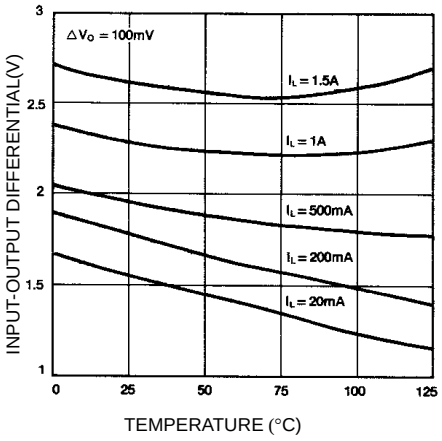


Figure 3. Dropout Voltage


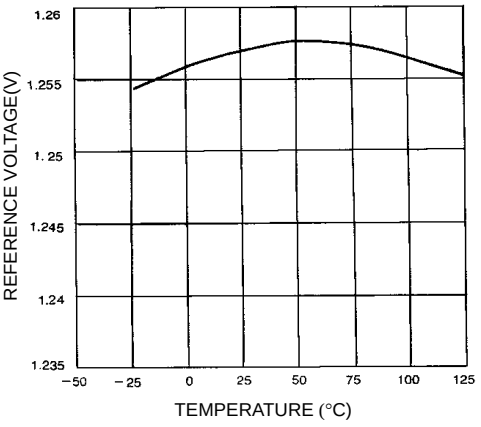


Figure 4. Reference Voltage

Typical Application

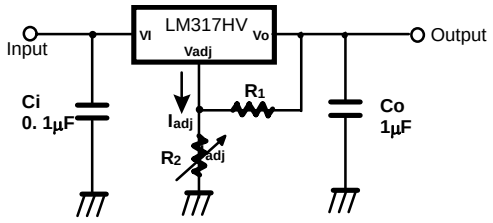

$$V_O = 1.25V\ (1+ R_2/ R_1)+I_{adj}\,R_2$$

Figure 5. Programmable Regulator


- C_i is required when regulator is located an appreciable distance from power supply filter.
  C_o is not needed for stability, however, it does improve transient response.
  Since I_{ADJ} is controlled to less than 100μA, the error associated with this term is negligible in most applications.

Mechanical Dimensions

Package

Dimensions in millimeters

TO-220 [SINGLE GAUGE]

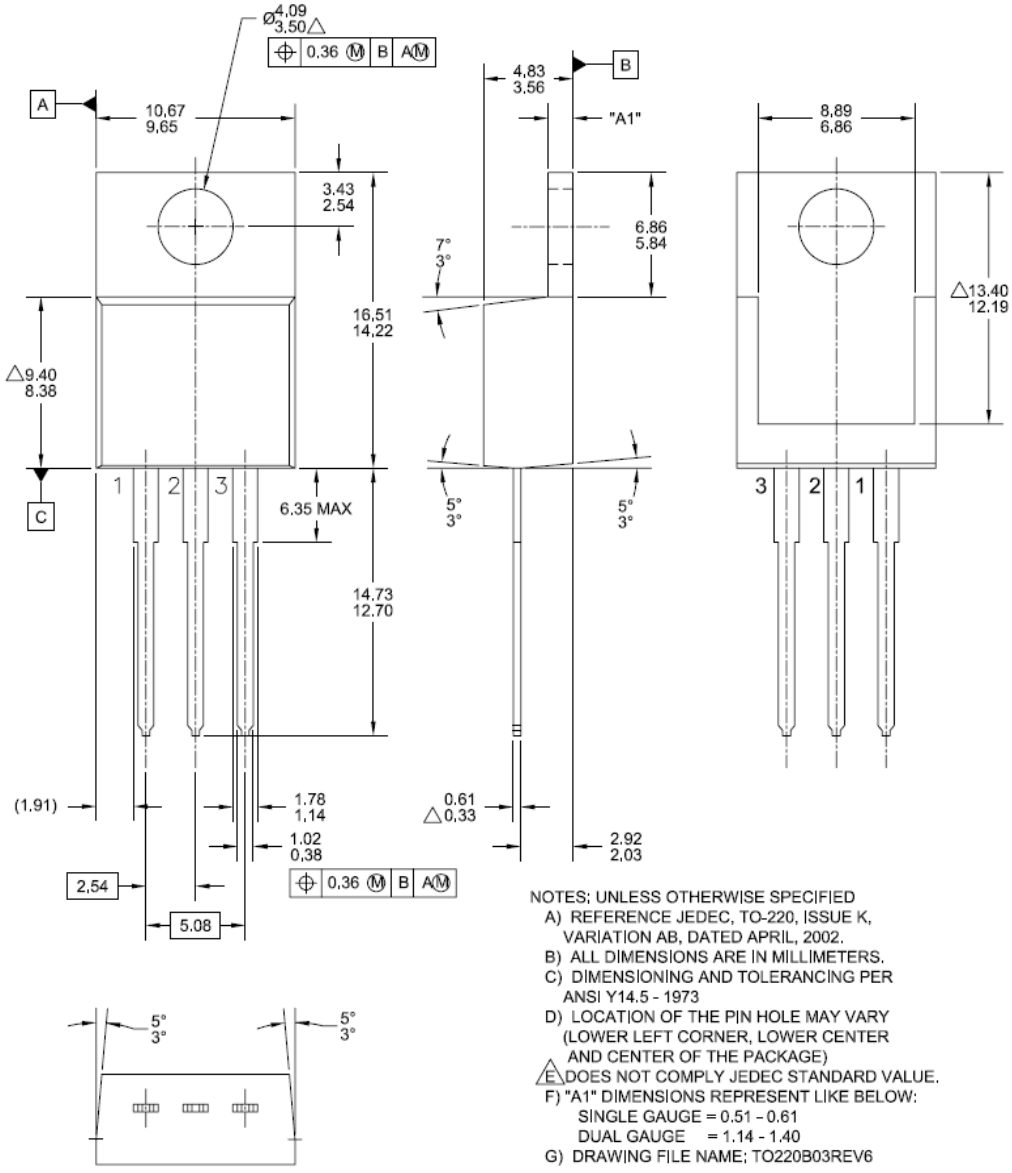

NOTES; UNLESS OTHERWISE SPECIFIED
A) REFERENCE JEDEC, TO-220, ISSUE K, VARIATION AB, DATED APRIL, 2002.
B) ALL DIMENSIONS ARE IN MILLIMETERS.
C) DIMENSIONING AND TOLERANCING PER ANSI Y14.5 - 1973
D) LOCATION OF THE PIN HOLE MAY VARY (LOWER LEFT CORNER, LOWER CENTER AND CENTER OF THE PACKAGE)
△E DOES NOT COMPLY JEDEC STANDARD VALUE.
F) "A1" DIMENSIONS REPRESENT LIKE BELOW:
SINGLE GAUGE = 0.51 – 0.61
DUAL GAUGE = 1.14 - 1.40
G) DRAWING FILE NAME: TO220B03REV6

Ordering Information

Product Number	Package	Operating Temperature
LM317AHVT	TO-220	0°C to +125°C

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.v

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

© 2009 Fairchild Semiconductor Corporation