


STT165GKXXB

Thyristor-Thyristor Modules










Type	V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V
STT165GK08B	900	800
STT165GK12B	1300	1200
STT165GK14B	1500	1400
STT165GK16B	1700	1600
STT165GK18B	1900	1800
STT165GK20B	2100	2000
STT165GK22B	2300	2200

Dimensions in mm (1mm=0.0394")

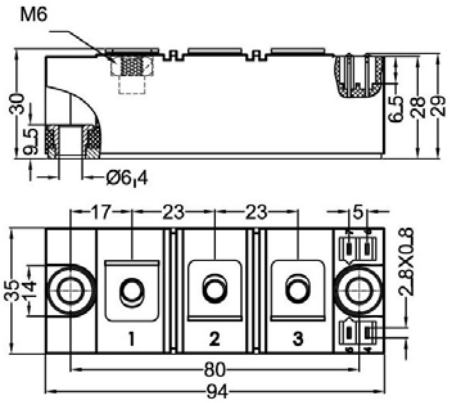

Symbol	Test Conditions		Maximum Ratings	Unit
I_{TRMS}, I_{FRMS} I_{TAVM}, I_{FAVM}	$T_{VJ}=T_{VJM}$ $T_C=85^oC$; 180° sine		300 165	A
I_{TSM}, I_{FSM}	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	6000 6400	A
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	5250 5600	
$\int i^2dt$	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	180000 170000	A^2s
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	137000 128000	
$(di/dt)_{cr}$	$T_{VJ}=T_{VJM}$ f=50Hz, t_p=200us $V_D=2/3V_{DRM}$ I_G=0.5A di_G/dt=0.5A/us	repetitive, $I_T=500A$ non repetitive, $I_T=I_{TAVM}$	150 500	A/us
$(dv/dt)_{cr}$	$T_{VJ}=T_{VJM}$; $R_{GK}=\infty$; method 1 (linear	$V_{DR}=2/3V_{DRM}$ voltage rise)	1000	V/us
P_{GM}	$T_{VJ}=T_{VJM}$ $I_T=I_{TAVM}$	t_p=30us t_p=500us	120 60	W
P_{GAV}			8	W
V_{RGM}			10	V
T_{VJ} T_{VJM} T_{stg}			-40...+125 125 -40...+125	°C
V_{ISOL}	50/60Hz, RMS $I_{ISOL}\leq$1mA	t=1min t=1s	3000 3600	V~
M_d	Mounting torque (M6) Terminal connection torque (M6)		2.25-2.75/20-25 4.5-5.5/40-48	Nm/lb.in.
Weight	Typical		173	g

Sirectifier®

©2008 SIRECTIFIER All rights reserved,
www.sirectifier.com
Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

STT165GKXXB

Thyristor-Thyristor Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_{RRM}, I_{DRM}	$T_{VJ}=T_{VJM}$; $V_R=V_{RRM}$; $V_D=V_{DRM}$	40	mA
V_T, V_F	I_T, I_F=300A; T_{VJ}=25°C	1.36	V
V_{TO}	For power-loss calculations only ($T_{VJ}=T_{VJM}$)	0.8	V
r_T		1.6	mΩ
V_{GT}	V_D=6V; T_{VJ}=25°C T_{VJ}=-40°C	2 2.6	V
I_{GT}	V_D=6V; T_{VJ}=25°C T_{VJ}=-40°C	150 200	mA
V_{GD}	$T_{VJ}=T_{VJM}$; $V_D=2/3V_{DRM}$	0.25	V
I_{GD}	$T_{VJ}=T_{VJM}$; $V_D=2/3V_{DRM}$	10	mA
I_L	T_{VJ}=25°C; t_p=30us; V_D=6V I_G=0.45A; di_G/dt=0.45A/us	200	mA
I_H	T_{VJ}=25°C; V_D=6V; R_{GK}=∞	150	mA
t_{gd}	T_{VJ}=25°C; $V_D=1/2V_{DRM}$ I_G=0.5A; di_G/dt=0.5A/us	2	us
t_q	$T_{VJ}=T_{VJM}$; I_T=160A; t_p=200us; -di/dt=10A/us typ. V_R=100V; dv/dt=20V/us; $V_D=2/3V_{DRM}$	150	us
Q_S	$T_{VJ}=T_{VJM}$; I_T, I_F=300A; -di/dt=50A/us	550	uC
I_{RM}		235	A
R_{thJC}	per thyristor/diode; DC current per module	0.155 0.0775	K/W
R_{thJK}	per thyristor/diode; DC current per module	0.225 0.1125	K/W
d_S	Creeping distance on surface	12.7	mm
d_A	Creepage distance in air	9.6	mm
a	Maximum allowable acceleration	50	m/s^2

FEATURES

* International standard package
* Copper base plate
* Glass passivated chips
* Isolation voltage 3600 V~
* UL file NO.E310749
* RoHS compliant

APPLICATIONS

* Motor control
* Power converter
* Heat and temperature control for industrial furnaces and chemical processes
* Lighting control
* Contactless switches

ADVANTAGES

* Space and weight savings
* Simple mounting
* Improved temperature and power cycling
* Reduced protection circuits

©2008 SIRECTIFIER All rights reserved,

Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

STT165GKXXB

Thyristor-Thyristor Modules

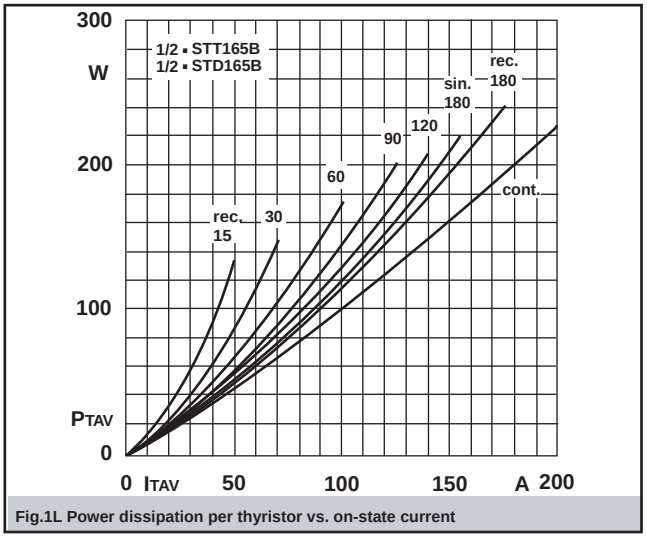


Fig.1L Power dissipation per thyristor vs. on-state current

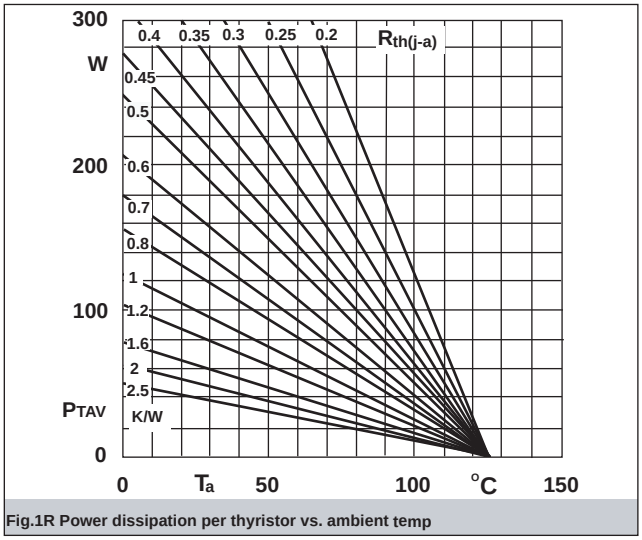


Fig.1R Power dissipation per thyristor vs. ambient temp

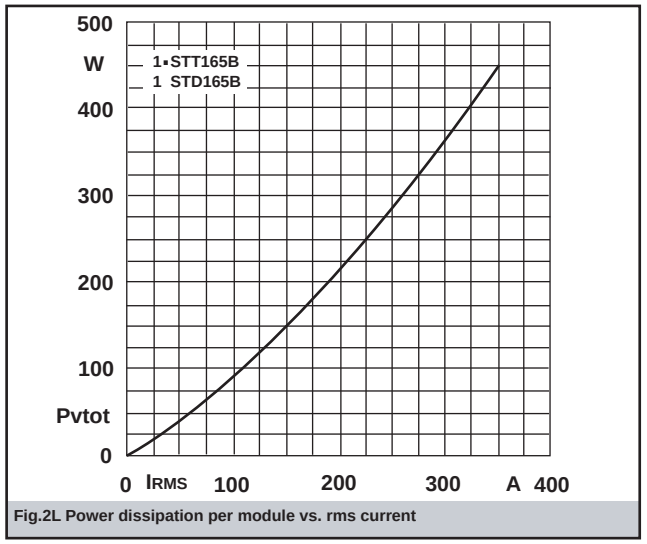


Fig.2L Power dissipation per module vs. rms current

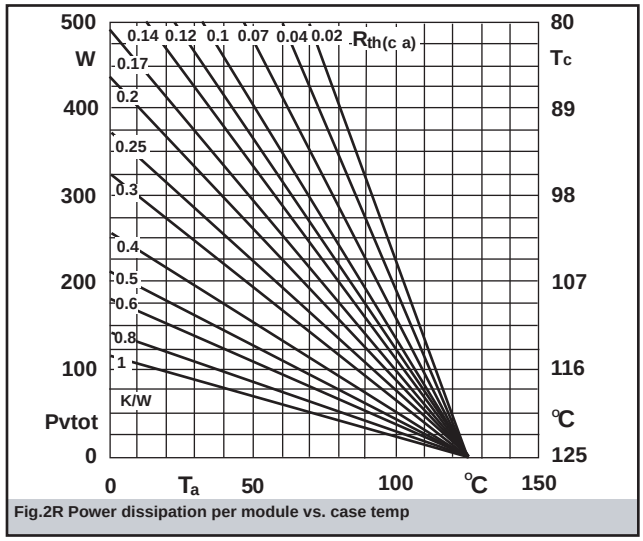


Fig.2R Power dissipation per module vs. case temp

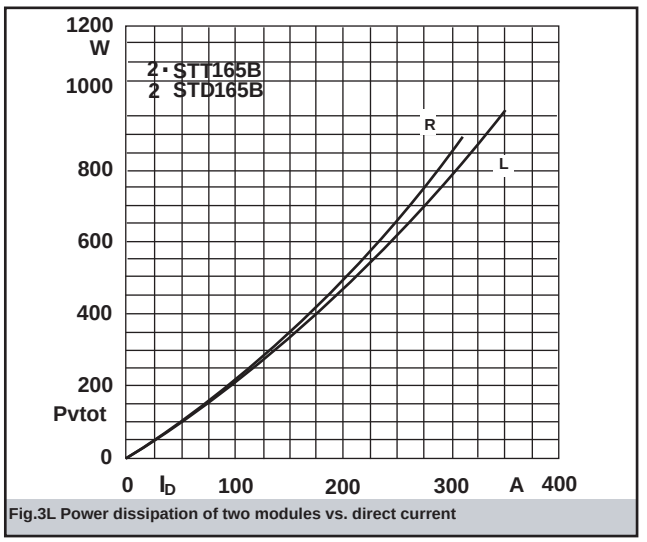


Fig.3L Power dissipation of two modules vs. direct current

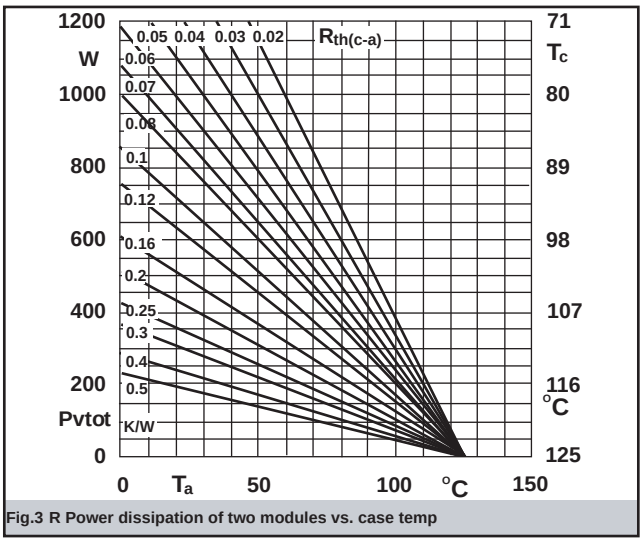


Fig.3 R Power dissipation of two modules vs. case temp

©2008 SIRECTIFIER All rights reserved,
www.sirectifier.com
Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com

STT165GKXXB

Thyristor-Thyristor Modules

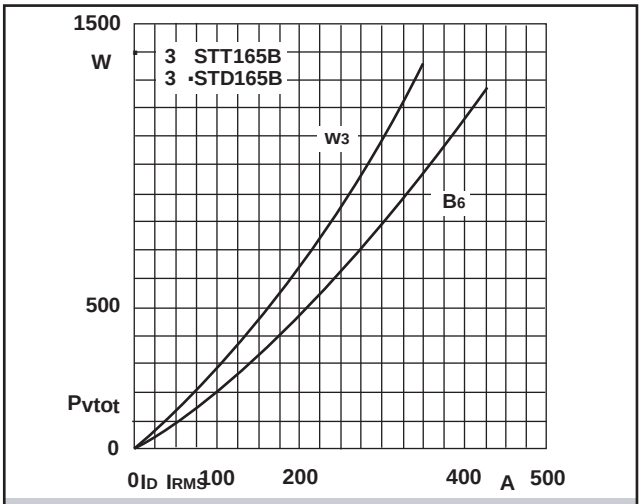


Fig.4L Power dissipation of three modules vs. direct and rms current

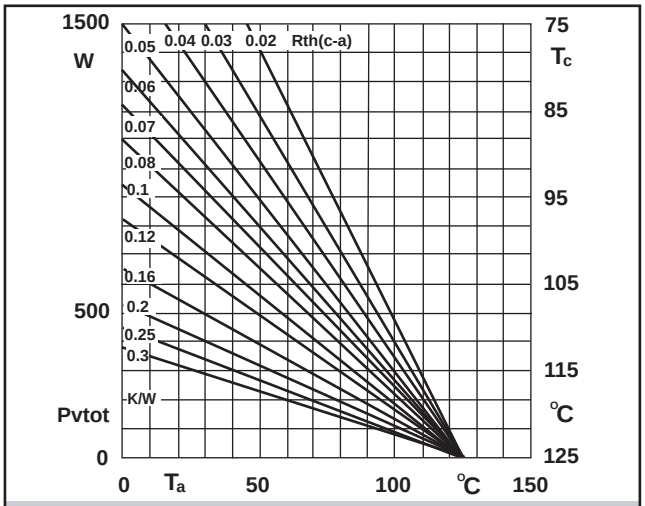


Fig.4R Power dissipation of three modules vs. case temp

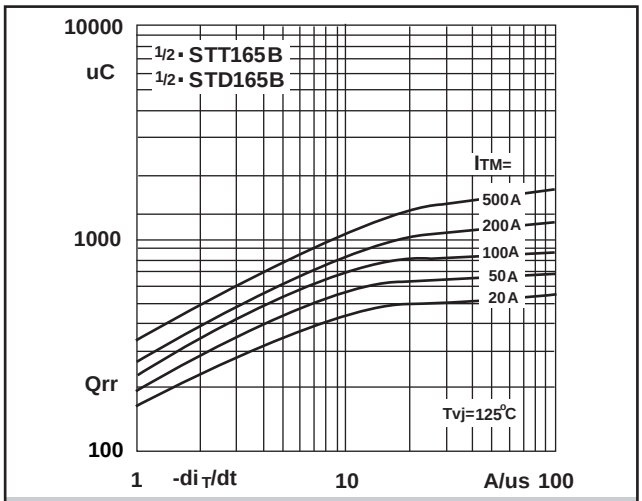


Fig.5 Recovered charge vs. current decrease

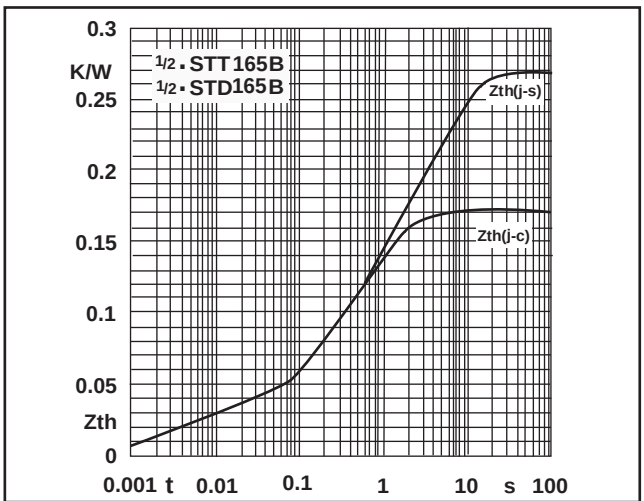


Fig.6 Transient thermal impedance vs. time

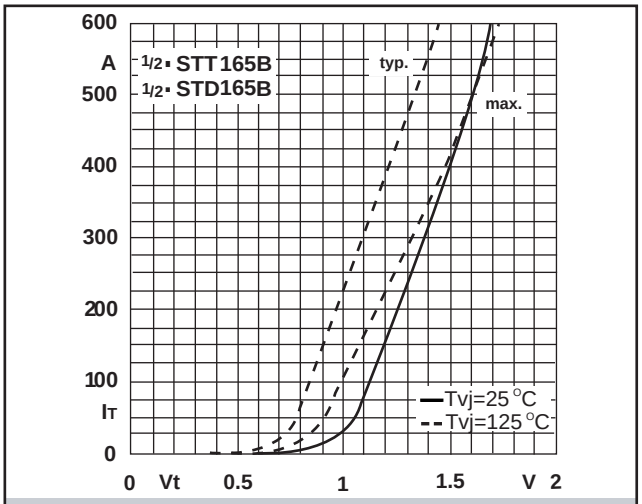


Fig.7 On-state charactristics

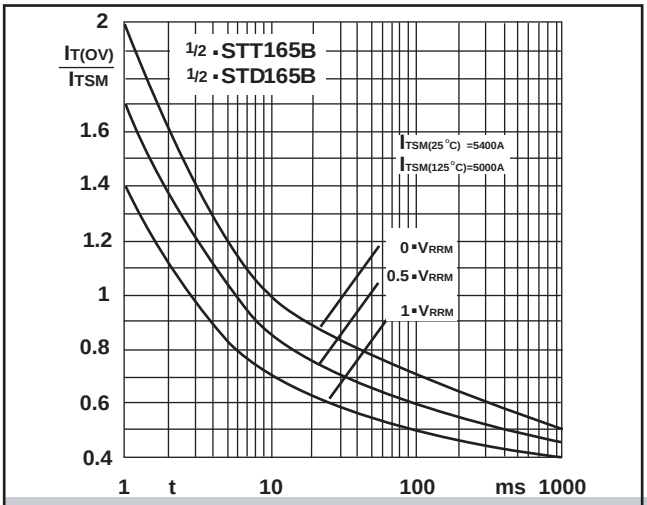


Fig.8 Surge overload current vs. time

©2008 SIRECTIFIER All rights reserved,

Tel: +86-519-86800000 Fax: +86-519-88019019 E-mail: sales@sirectifier.com