

**Surface Mount Schottky Barrier Rectifier**  
**Reverse Voltage - 20 to 200 V**  
**Forward Current - 1.0 A**

## FEATURES


- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

## MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg 0.00086oz

## PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

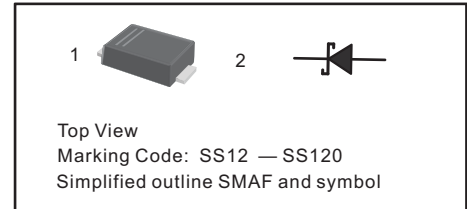

## Absolute Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter                                                                                                 | Symbols            | SS12F      | SS14F | SS16F | SS18F | SS110F   | SS112F | SS115F   | SS120F | Units |
|-----------------------------------------------------------------------------------------------------------|--------------------|------------|-------|-------|-------|----------|--------|----------|--------|-------|
| Maximum Repetitive Peak Reverse Voltage                                                                   | V <sub>RRM</sub>   | 20         | 40    | 60    | 80    | 100      | 120    | 150      | 200    | V     |
| Maximum RMS voltage                                                                                       | V <sub>RMS</sub>   | 14         | 28    | 42    | 56    | 70       | 84     | 105      | 140    | V     |
| Maximum DC Blocking Voltage                                                                               | V <sub>DC</sub>    | 20         | 40    | 60    | 80    | 100      | 120    | 150      | 200    | V     |
| Maximum Average Forward Rectified Current                                                                 | I <sub>F(AV)</sub> | 1.0        |       |       |       |          |        |          |        | A     |
| Peak Forward Surge Current, 8.3ms<br>Single Half Sine-wave Superimposed<br>on Rated Load (JEDEC method)   | I <sub>FSM</sub>   | 40         |       |       |       | 30       |        |          |        | A     |
| Max Instantaneous Forward Voltage at 1 A                                                                  | V <sub>F</sub>     | 0.55       |       | 0.70  |       | 0.85     |        | 0.90     |        | V     |
| Maximum DC Reverse Current   T <sub>a</sub> = 25°C<br>at Rated DC Reverse Voltage   T <sub>a</sub> =100°C | I <sub>R</sub>     | 0.3<br>10  |       |       |       | 0.2<br>5 |        | 0.1<br>2 |        | mA    |
| Typical Junction Capacitance <sup>1)</sup>                                                                | C <sub>j</sub>     | 110        |       | 80    |       |          |        |          |        | pF    |
| Typical Thermal Resistance <sup>2)</sup>                                                                  | R <sub>θJA</sub>   | 115        |       |       |       |          |        |          |        | °C/W  |
| Operating Junction Temperature Range                                                                      | T <sub>j</sub>     | -55 ~ +125 |       |       |       |          |        |          |        | °C    |
| Storage Temperature Range                                                                                 | T <sub>stg</sub>   | -55 ~ +150 |       |       |       |          |        |          |        | °C    |

1) Measured at 1MHz and applied reverse voltage of 4 V D.C.

2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

Fig.1 Forward Current Derating Curve

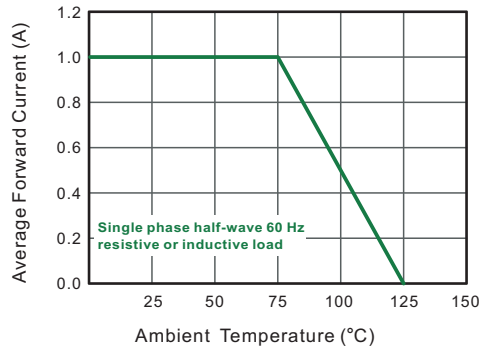


Fig.2 Typical Reverse Characteristics

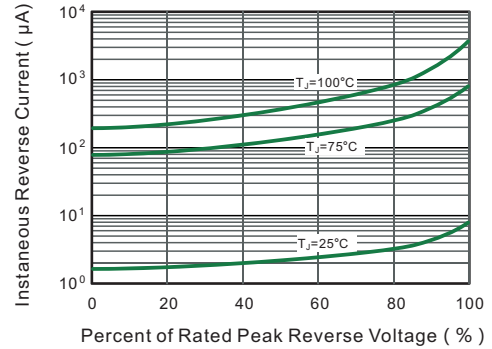


Fig.3 Typical Forward Characteristic

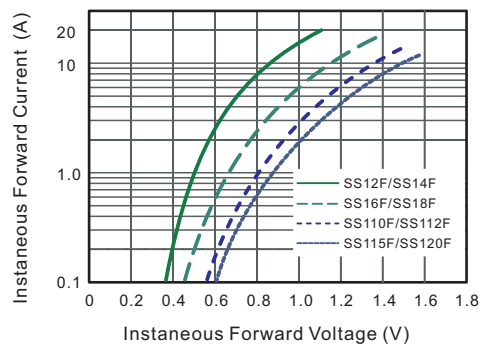


Fig.4 Typical Junction Capacitance

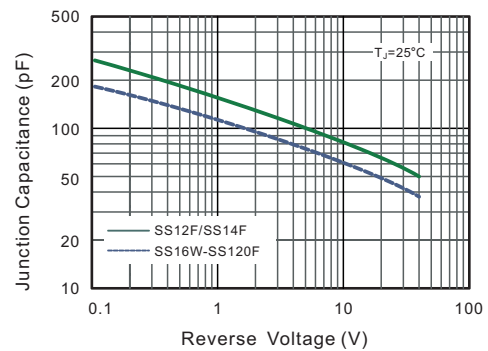


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


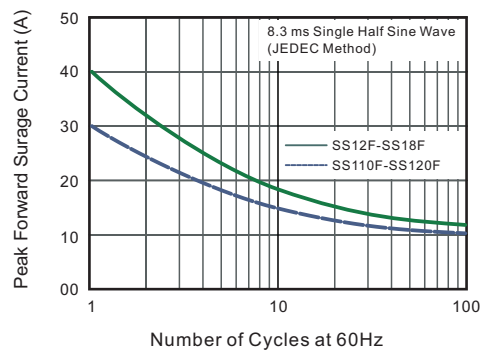



Fig.6- Typical Transient Thermal Impedance

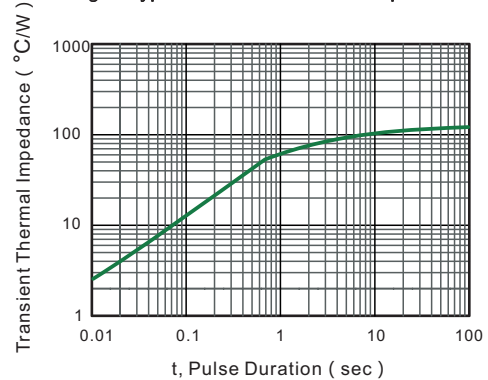

## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SMAF

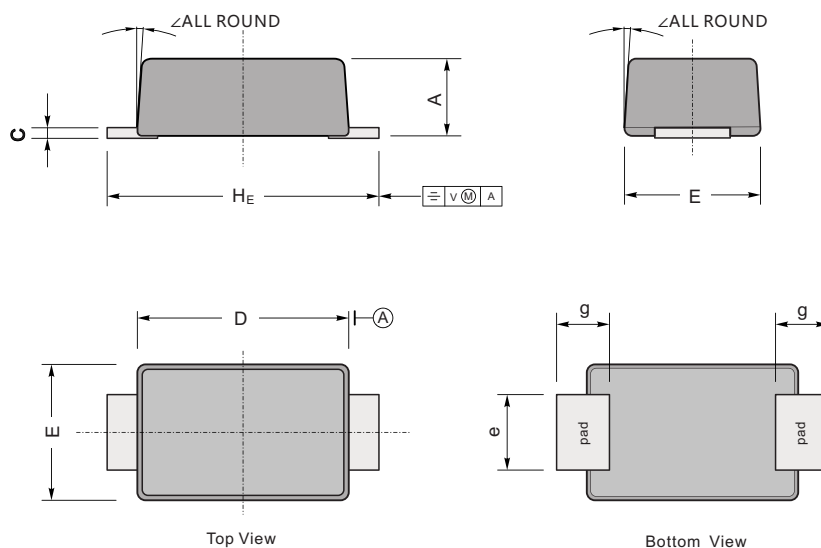

| UNIT |     | A   | C    | D   | E   | e   | g   | H <sub>E</sub> | ∠  |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm   | max | 1.3 | 0.23 | 3.7 | 2.7 | 1.6 | 1.3 | 4.9            | 7° |
|      | min | 1.1 | 0.18 | 3.3 | 2.4 | 1.3 | 1.0 | 4.4            |    |
| mil  | max | 51  | 9.1  | 146 | 106 | 63  | 51  | 193            |    |
|      | min | 43  | 7.1  | 130 | 94  | 51  | 39  | 173            |    |

## The recommended mounting pad size

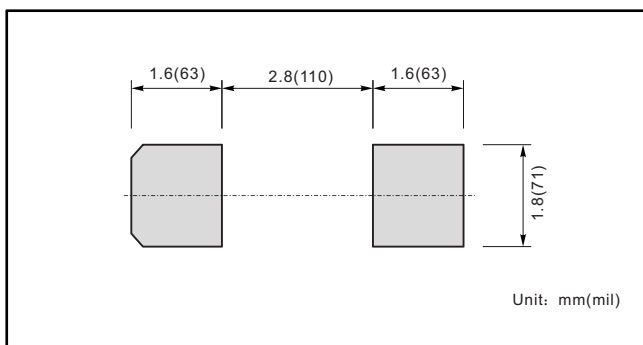

## Marking

| Type number | Marking code |
|-------------|--------------|
| SS12F       | SS12         |
| SS14F       | SS14         |
| SS16F       | SS16         |
| SS18F       | SS18         |
| SS110F      | SS110        |
| SS112F      | SS112        |
| SS115F      | SS115        |
| SS120F      | SS120        |