15 WKLS 40

Jack connectors

Jack plug acc. to JIS C 6560 JC35P3, 3.5 mm, 3 poles/ stereo, angular version, with solder terminals

State: Active

15 WKLS 40

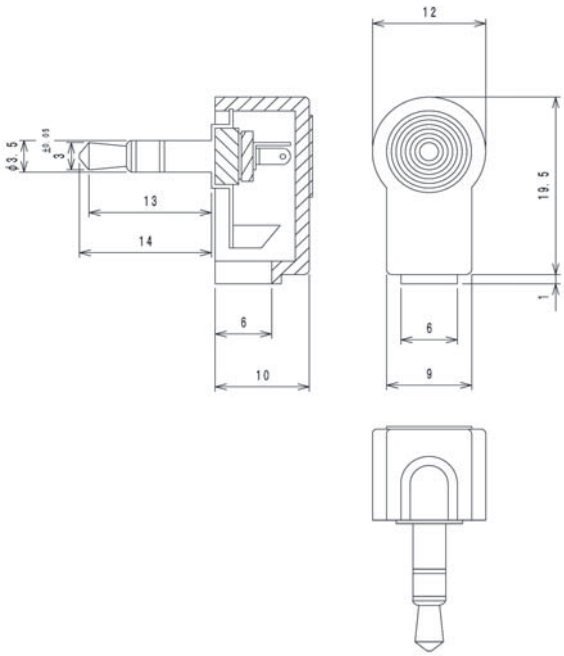

Environmental conditions

Temperature range	-20 °C/+70 °C

Materials

Insulating body	PC
Contact	CuZn/steel, nickel-plated
Insulation	ebonite
Housing	PE

Connectable conductors for solder area

Cable diameter	4 mm

Electrical data (at T_{amb} 20 °C)

Rated current	1 A
Rated voltage	34 V AC/DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

1502 01	1503 02	1503 03
1503 07	1503 08	1503 09
1503 17	1503 18	1520 01
1520 02	4510	4511
KLB 4	KLBR 4	

15 WKLS 40

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
WKLS 40	3	100	500

Packaging:
in bulk, in a cardboard box or a plastic bag