


PC Board Layout
Component Side Shown(10P8C)



- NOTES:**
Mechanical:
 1. Housing material : PBT UL94V-0 ,
 Color: Black
 2. Contact material: Phosphor Bronze t=0.35mm
 ③ 3. Contact plating: Contact area--6u" gold plating
 Tails---Tin plated all over 50u" Nickel
 ③ 4. Shell material: Copper Alloy
 ③ 5. Shell plating: Nickel plated
 6. Operating Life: 750 Cycles min.
 7. PCB Retention Pre-solder: 1 LB min.
 8. PCB Retention Post-solder: 10 LBS min.
Electrical:
 1. Voltage Rating: 125VAC.
 2. Current Rating: 1.5AMP.
 3. Contact Resistance: 30mΩ max.
 4. Insulation Resistance: 1000MΩ min. @ 500 VDC
 5. Dielectric Strength: 1000 VAC 60Hz, 1 min.
Environmental:
 1. Storage: -40°C To +85°C
 2. Operation: -40°C~+85°C
 ③ 3. Wave Soldering Temp: 200~220°C(5~10S)
 ③ Packing: 70pcs/Tray, 1960pcs/Carton

RoHS compliant
Unit:mm

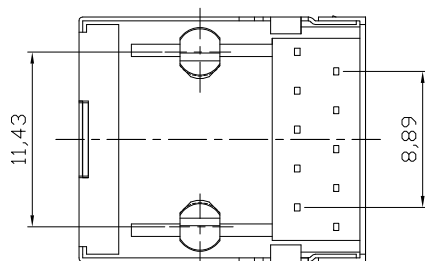

File No.: E345352

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	07.11.2007	N.Schulz	
X.X	±0.20					Approved	27.05.2013	Amy	ASSMANN WSW-No.
X.XX	±0.15								A-20042-LPS
X.XXX	±0.10	③	Update	27.05.2013	Amy				Drawing-No.
DIM	TOL	②	Update	02.07.2009	Dean			ASS 0423 CO	rev03
		①	Drawn	07.11.2007	N.Schulz			Replace	SHEET
Angle	±5°	Id.	Modification	Date	Name				

RoHS compliant
Unit:mm



File No.: E345352



ASS 0423 CO

rev03

Replace

SHEET