





Features


- Designed for use in power circuit applications which require European mark.
- Designed to protect against common mode noise transient surge.

Safety Agency : Standard		File NO.
TÜV	IEC60384-14	J9650111


Dimensions

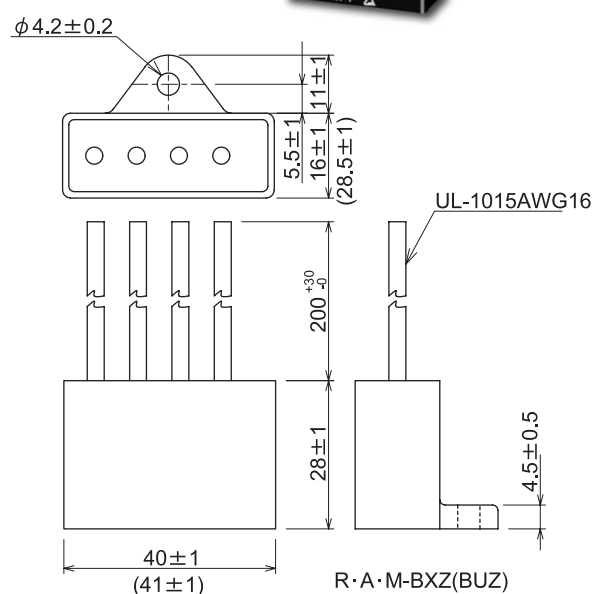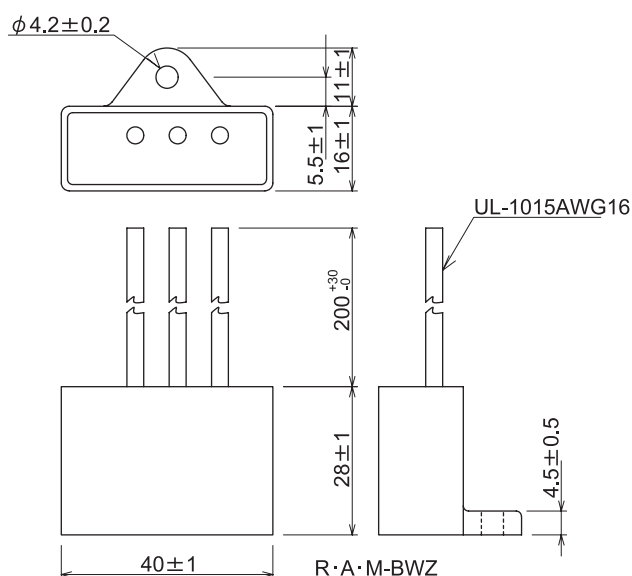


Circuit



R · A · M-BWZ



R · A · M-BXZ



R · A · M-BUZ

Electrical Specifications

Safety Agency	Model Number		Rated Voltage 50/60Hz Vrms	Max Line Voltage Vrms	Varistor Voltage (V)±10%	DC Breakdown Voltage (Ez) +30, -20%	Peak Surge Current 8/20μs (A)	Insulation Resistance DC500V	Voltage Withstand Test	Operating Temp. range (°C)	Weight (g)
	R · A · M-242BWZ	1-2	125	140	540	-	2000	10 ⁹ Ω	-	-20 ~ +70	40
		1,2-≡	-	-	-	2400			AC1000V 60s		
	R · A · M-302BWZ	1-2	250	300	940	-			AC1250V 3s		
		1,2-≡	-	-	-	3000			-		
	R · A · M-362BWZ	1-2	250	300	940	-			AC1500V 60s		50
		1,2-≡	-	-	-	3600			AC1500V 60s		
	R · A · M-362BXZ	1-2-3-1	250	300	940	-			AC1800V 3s		
		1,2,3≡	-	-	-	3600			AC1500V 60s		
	R · A · M-302BUZ	1-2-3-1	250	300	470	-		-	AC1800V 3s		
		3-≡	-	-	-	3000		10 ⁹ Ω	AC1500V 60s		