

# YG911S2R

(200V / 5A TO-220F15)

## LOW LOSS SUPER HIGH SPEED DIODE

### Features

- Low  $V_F$
- Super high speed switching.
- High reliability by planer design.

### Applications

- High speed power switching.

### Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$		200	V
Repetitive peak surge reverse voltage	$V_{RSM}$		200	V
Isolation voltage	$V_{iso}$	Terminals to Case, AC, 1min.	1500	V
Average output current	$I_O$	duty=1/2, $T_c=134^\circ\text{C}$ Rectangl wave	5	A
Surge current	$I_{FSM}$	Sine wave 10ms	50	A
Operating junction temperature	$T_j$		-40 to +150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-40 to +150	$^\circ\text{C}$


- Electrical Characteristics ( $T_a=25^\circ\text{C}$  Unless otherwise specified )

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	$V_F$	$I_F=5.0\text{A}$	0.95	V
Reverse current	$I_R$	$V_R=V_{RRM}$	100	$\mu\text{A}$
Reverse recovery time	$t_{rr}$	$I_F=0.1\text{A}, I_R=0.2\text{A}, I_{rec}=0.05\text{A}$	35	ns
Thermal resistance	$R_{th(j-c)}$	Junction to case	5.0	$^\circ\text{C}/\text{W}$

- Mechanical Characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

### Outline Drawings

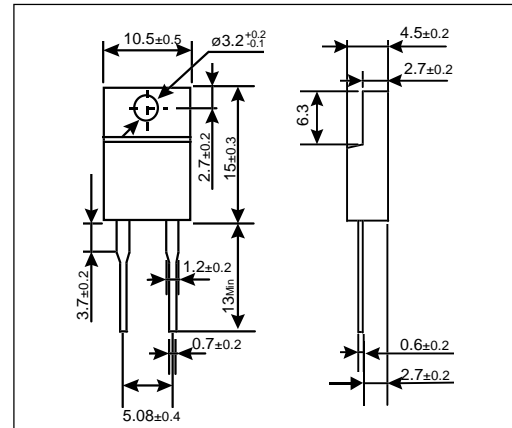


JEDEC

EIAJ

SC-67

### Connection Diagram

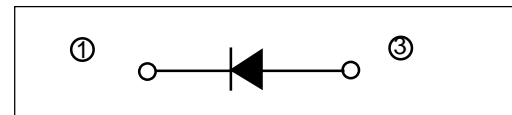

■ Characteristics

