
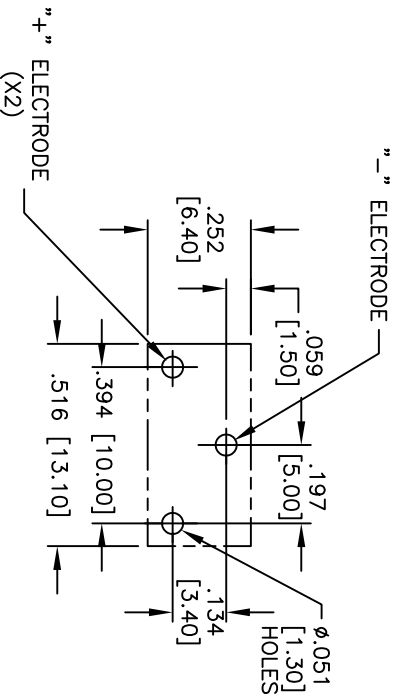
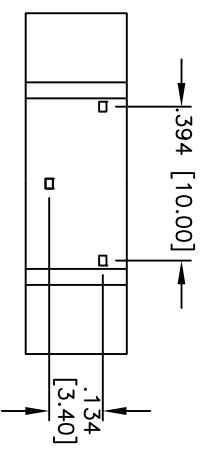
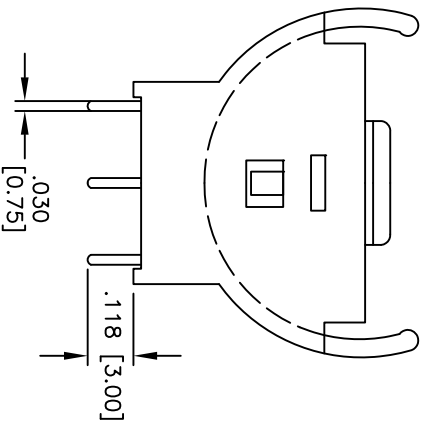
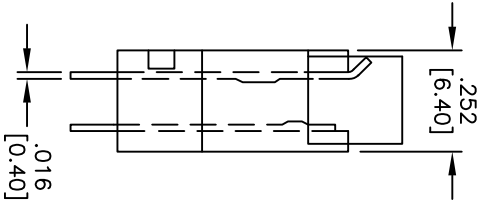


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

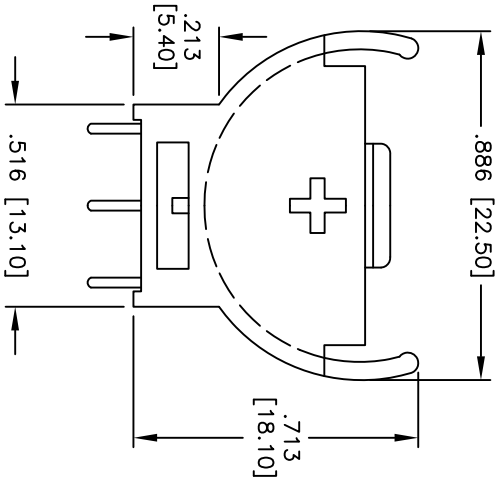

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**

**Material:** Nylon 46, glass reinforced, rated UL94V-0, color Black  
**Housing:** Phosphor Bronze 0.6MM THK, Tin plated over Nickel  
**Contact:** Electrical:  
 Voltage rating: 500V (AC/DC)  
 Current rating: 3A (AC/DC)  
 Contact resistance: 12 Milliohms  
 Insulation resistance: 500 Mega ohms  
 Operating temperature: -40°C to 105°C  
 Environmental:  
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	MM
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS

DATE	DATE
AY	1/13/11
SC	1/13/11

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COIN CELL BATTERY HOLDER FOR ONE CELL CR2032

REV.	DATE	BY	CHKD.	APPD.	SCALE	SHEET	OF
					NTS	1	1

6 5 4 3 2 1