

AC Axial Fans




Approvals



Life expectancy

L-10 LIFE AT 40°C:
80 000 hours

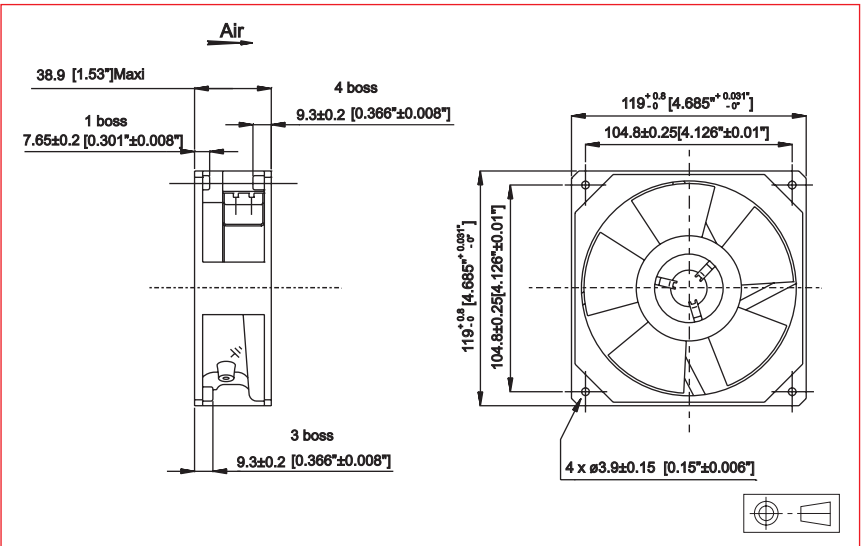




AC Motor

Electrical protection: impedance protected
Housing material: zamak
Impeller material: plastic UL 94 VO
Weight: 725 g
Bearing system: ball bearings
Connection: terminals

Single phase
IP 20

Available with:

- Flying leads
- IP 54
- Speed sensor
- Non RoHS on request

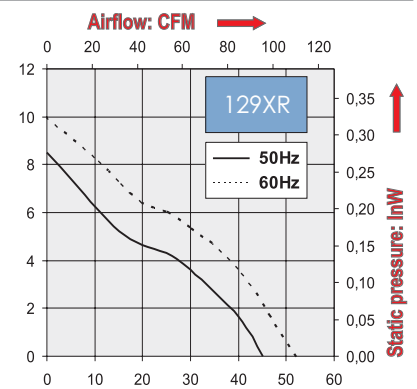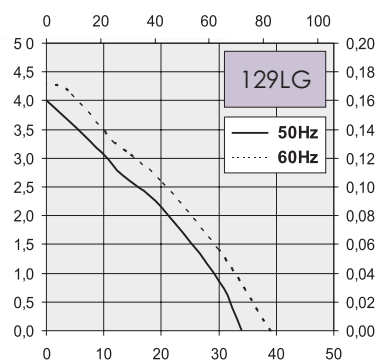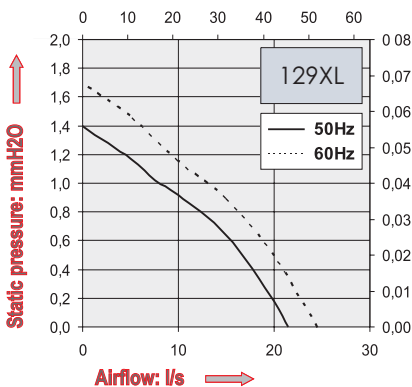

Part Number	Nominal voltage	Airflow		Noise level	Nominal speed	Frequency	Input Power	Nominal current	Starting current	Operating temperature	
	V	l/s	Cfm	dB(A)	RPM	Hz	W	mA	mA	Min.°C	Max.°C
129XL-0282-010	115	21,5	45,5	31	1350	50	12	135	145	-10	70
		24,5	51,9	33,5	1550	60	10	115	125	-10	70
129XL-0281-010	208-240	21,5	45,5	31	1350	50	12	75	90	-10	70
		24,5	51,9	33,5	1550	60	10	65	75	-10	70
129LG-0282-010	115	34	72	44,5	2200	50	16	200	250	-10	70
		39	82,6	47,5	2400	60	13	160	200	-10	70
129LG-0281-010	220	34	72	44,5	2200	50	18	110	140	-10	70
		39	82,6	47,5	2400	60	15	90	120	-10	70
129XR-0282-010	115	45	95,3	49	2800	50	16	200	310	-10	70
		52	110,2	54	3200	60	15	180	260	-10	70
129XR-0281-010	220	45	95,3	49	2800	50	18	125	170	-10	70
		52	110,2	54	3200	60	15	105	150	-10	70

Additional versions:

Dual voltage 115V - 230V - salt spray protected - shock and vibration protected - marine specifications

Accessories:

Refer to AC - DC Compact fans & Accessories catalogue