

15ACEW_4 series

15Watt - AC-DC converter



AC-DC Converter

15 Watt

- ⊕ Ultra-wide 85-305VAC and 100-430VDC input voltage range
- ⊕ Operating ambient temperature range: -40°C to +85°C
- ⊕ Up to 81.5% efficiency
- ⊕ No-load power consumption 0.1W
- ⊕ 5000m altitude application
- ⊕ EMI performance meets CISPR32/EN55032 CLASS B, EN55014
- ⊕ IEC/EN/UL62368/EN60335/EN61558 safety approval
- ⊕ Design to meet IEC/EN60601-1/ANSI/AAMI ES60601-1 standards (2xMOPP)



15ACEW_4 series AC-DC converters is one of GAPTEC's new generation compact size power converter. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/ EN61558/IEC/EN60601-1/ANSI/AAMI ES60601-1 standards. The converters are widely used in industrial, power, medical treatment, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Common specifications

Item	Operating condition	Min	Typ	Max	Units
Short circuit protection:		Hiccup, continuous, self-recovery			
Cooling:		Free air convection			
Operating temperature:		-40		+85	°C
Operation temperature range:	Wave-soldering Manual-welding	260 ± 5°C; time: 5 - 10s 360 ± 10°C; time: 3 - 5s			
Storage humidity:				< 95	%RH
Switching Frequency			65		kHz
Power derating:	+50°C to +70°C: 3.3V	3.0			%/°C
	+55°C to +70°C: 9/12/15/24V	2.67			%/°C
	+70°C to +85°C	0.66			%/°C
	85VAC - 100VAC:	1.33			%/VAC
	277VAC - 305VAC:	0.71			%/VAC
	2000m - 5000m:	0.67			%/Km
Safety standard:		IEC/EN/UL62368/EN60335/EN61558/IEC/EN60601-1/ANSI/AAMI ES60601-1			
Safety Certification:		IEC/EN/UL62368/EN60335/EN61558			
Safety Class:		Class II			
MTBF:		MIL-HDBK-217F@25°C > 3200,000 h			
Hot plug:		Unavailable			
Case material:		Black plastic, flame-retardant and heat-resistant (UL94V-0)			
Designed Life: (230VAC)	Ta: 25°C 100% load Ta: 55°C 100% load	>130x10 ³ h >27x10 ³ h			
Dimension	DIP package	47.60 x 26.80 x 23.50 mm			
	Chasis mounting	76.00 x 31.50 x 32.30 mm			
	DIN-rail mounting	76.00 x 31.50 x 36.90 mm			
Weight: (DIP)	3.3V/5V/9V/12V 15V/24V	48			g
Weight: (Chasis mounting)		68			g
Weight: (DIN rail mounting)		88			g

Input specifications

Item	Operating condition	Min	Typ	Max	Units
Input voltage range	• AC Input	85		305	VAC
	• DC Input	100		430	VDC
Input frequency		47		63	Hz
Input current	• 115VAC			0.45	A
	• 230VAC			0.30	A
Inrush current	• 230VAC		30		A
Leakage Current	277VAC/50Hz		0.1mA RMS Max.		
Built In Fuse			2A/300V, slow-blow		

Isolation specifications

Item	Operating Conditions	Min	Typ	Max	Units
Isolation (Input-Output)	Electric Strength Test for 1min, leakage current <5mA	4000			VAC

Example:

15ACEW_03S4

**15 = 15Watt; AC = AC-DC; E = case style ; W = wide input
03 = 3.3Vout; S = single output; 4 = 4 kVAC isolation**

Note:

- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta = 25°C, humidity <75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

15ACEW_4 series

15Watt - AC-DC converter

Output specifications					
Item	Operating condition	Min	Typ	Max	Units
Output voltage accuracy			±2		%
Line regulation	Full load		±0.5		%
Load regulation	0% - 100% load		±1		%
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		50	100	mV
Stand-by Power Consumption	230VAC: 3.3/5/9/12/15V 230VAC: 24V		0.1 0.12		W W
Temperature Coefficient			±0.02		%/°C
Over-current Protection			≥110%Io, self-recovery		
Over-voltage Protection	3.3/5VDC output 9VDC output 12/15VDC output 24VDC output		≤7.5VDC ≤15VDC ≤20VDC ≤30VDC		
Min. load		0			%
Hold-up Time	115VAC input 230VAC input		10 55		ms


Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

Approval	Model	Power [W]	Output [Vo]	Output [Io]	Efficiency [% , typ]	Capacitive load [μF, max]
UL/CE	15ACEW_03S4	13.2	3.3V	4000mA	82	6000
UL/CE	15ACEW_05S4	15	5V	3000mA	85	5000
UL/CE	15ACEW_09S4	15	9V	1670mA	84	3000
UL/CE	15ACEW_12S4	15	12V	1250mA	85	2000
UL/CE	15ACEW_15S4	15	15V	1000mA	85	1500
UL/CE	15ACEW_24S4	15	24V	625mA	86	680

Note: * Use suffix "CM" for chassis and suffix "DR" for DIN-Rail mounting.

EMC specifications					
Emissions	CE	CISPR32/EN55032 CLASS B CISPR11/EN55011 CLASS B EN55014-1			
Emissions	RE	CISPR32/EN55032 CLASS B CISPR11/EN55011 CLASS B EN55014-1			
Immunity	ESD	IEC/EN 61000-4-2 IEC/EN55014-2	Contact ±6KV/Air ±8KV		perf. Criteria B perf. Criteria B
Immunity	RS	IEC/EN 61000-4-3 IEC/EN55014-2	10V/m		perf. Criteria A perf. Criteria B
Immunity	EFT	IEC/EN61000-4-4 ±2KV IEC/EN61000-4-4 ±4KV (See Fig.2 for recommended circuit) EN55014-2			perf. Criteria B perf. Criteria B perf. Criteria B
Immunity	Surge	IEC/EN61000-4-5 line to line ±1KV (See Fig.1 for typical application circuit) IEC/EN61000-4-5 line to line ±2KV (See Fig.2 for recommended circuit) EN55014-2			perf. Criteria B perf. Criteria B perf. Criteria B
Immunity	CS	IEC/EN 61000-4-6 EN55014-2	10 Vr.m.s		perf. Criteria A perf. Criteria A
Immunity	Voltage dip, short interruption and voltage variation	IEC/EN 61000-4-11 EN55014-2	0%-70%		perf. Criteria B perf. Criteria B


Product Characteristic Curve

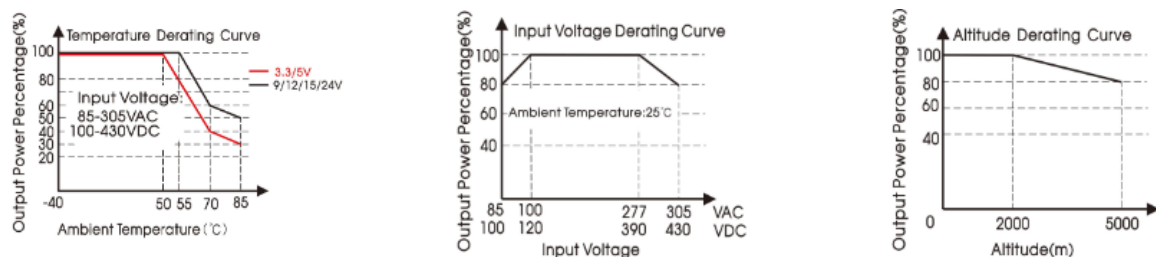

Note:

- ① With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves;
- ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

Efficiency

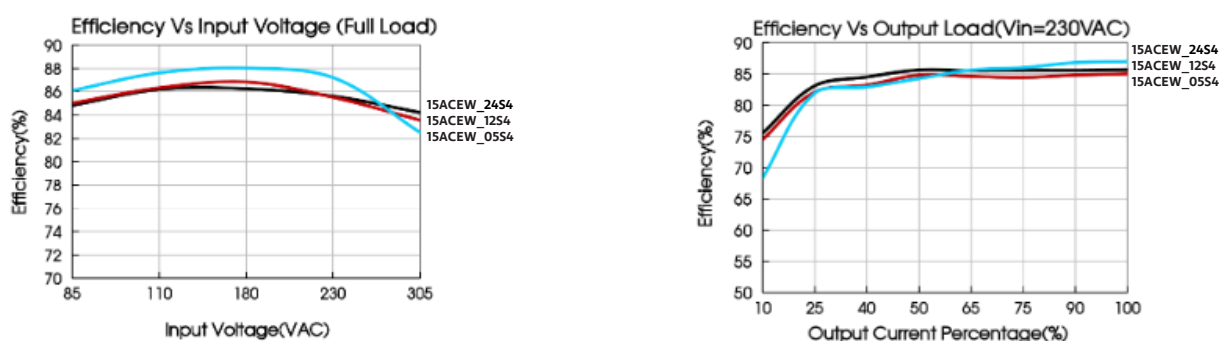

Typical application

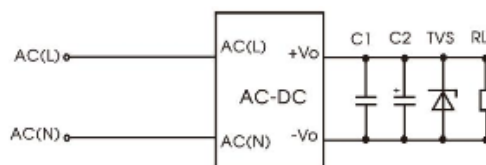



Fig. 1: Typical circuit diagram

Part No.	C1 (μ F)	C2 (μ F)	TVS
15ACEW_03S4	1 μ F/50V	220 μ F/16V	SMBJ7.0A
15ACEW_05S4		220 μ F/16V	SMBJ7.0A
15ACEW_09S4		100 μ F/25V	SMBJ12A
15ACEW_12S4		100 μ F/25V	SMBJ20A
15ACEW_15S4		100 μ F/25V	SMBJ20A
15ACEW_24S4		100 μ F/25V	SMBJ30A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure


EMC compliance recommended

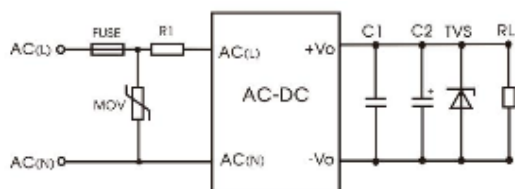


Component	Recommended value
MOV	S14K350
R1	6.8 Ω /3W
FUSE	3.15A/300V, slow-blow, required

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

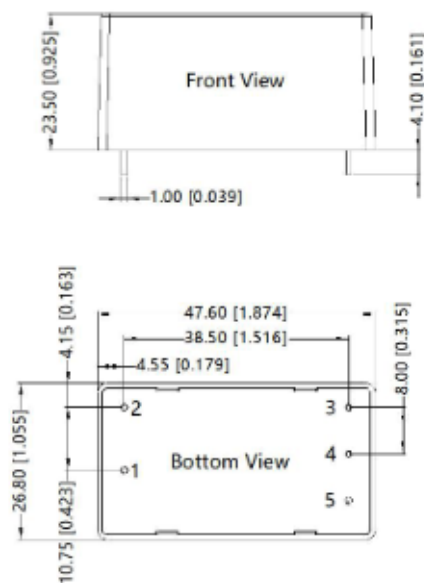

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.50 [\pm 0.020]$




Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	-Vo
4	+Vo
5	No Pin

Chassis mounting

THIRD ANGLE PROJECTION

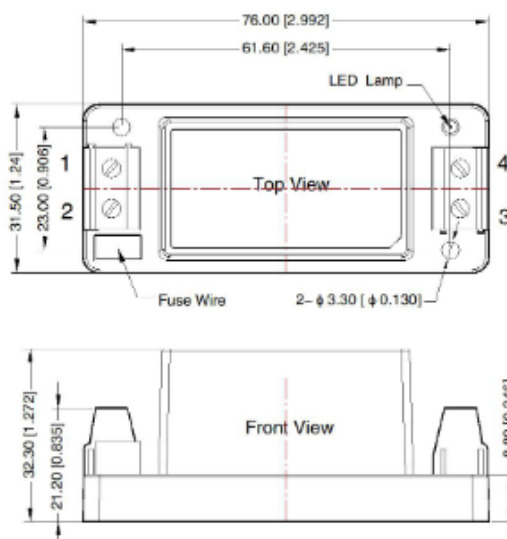


Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00 [\pm 0.039]$

15ACEW_4 series

15Watt - AC-DC converter

DIN rail mounting

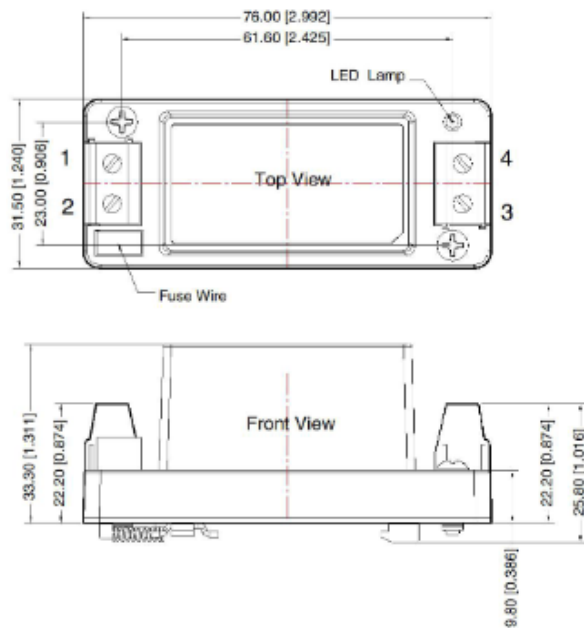

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:

Unit: mm[inch]

Wire range: 24-12 AWG

Tightening torque: Max 0.4 N-m

Mounting rail: TS35, rail needs to

connect safety ground

General tolerances: $\pm 1.00 [\pm 0.039]$