



■ Features

- 16A switching capability
- Sealed version available
- Transparent sealed available
- Class B/F available
- Conform to RoHS,ELV directive

■ Ordering Code

TRA1H		D	—	12VDC	—	S	—	H
1		2	3			4	5	
1. Relay Model	2. Coil Power: D=0.72W, L=0.54W		3. Coil Nominal Voltage: 3, 5, 6, 9, 12, 24, 48VDC					
4. S: Sealed		5. Contact Form: Z: Form C, H: Form A						

■ Coil Data (at 20°C)

Nominal Voltage(VDC)	3	5	6	9	12	24	48	0.54W
Coil Resistance($\Omega \pm 10\%$)	17	46	67	150	270	1050	4250	
Rated Current(mA)	180	108	90	60	45	22.5	11.3	
Max Operate Voltage(VDC)	2.4	4	4.8	7.2	9.6	19.2	38.4	
Min Release Voltage(VDC)	0.15	0.25	0.3	0.45	0.6	1.2	2.4	0.72W
Coil Resistance($\Omega \pm 10\%$)	13	35	50	110	200	800	3200	
Rated Current(mA)	240	144	120	80	60	30	15	
Max Operate Voltage(VDC)	2.4	4	4.8	7.2	9.6	19.2	38.4	
Min Release Voltage(VDC)	0.15	0.25	0.3	0.45	0.6	1.2	2.4	
Rated Current	130% of nominal voltage at 70°C, 170% of nominal voltage at 23°C							

■ Contact Data

Contact Form	1H/1Z
Contact Material	Silver Alloy
Load	Resistive Load(COS ϕ =1)
Contact Ratings	16A 250VAC 16A 30VDC
Minimum Load	100mA 5VDC
Max Switching Voltage	250VAC/30VDC
Max Switching Current	16A
Max Switching Power	4000VA/480W
Contact Resistance	100m Ω Max at 6VDC 1A
Life Expectancy	Electrical: 100,000 Operations (at 30 Operations/minute)
	Mechanical: 10,000,000 Operations (at 300 Operations/minute)


■ Characteristics Data

Insulation Resistance	100MΩMin at 500VDC
Dielectric Strength Between Open Contacts	1000VAC (for one minute)
Between Contacts and Coil	5000VAC (for one minute)
Operate Time	20ms
Release Time	10ms
Temperature Range	-40°C to +70°C
Shock Resistance	Operating Extremes: 10G 11ms Damage Limits: 100G 6ms
Vibration Resistance	10-55Hz, 1.5mm
Max. Switching Frequency	Mechanical: 18,000 operations/hr Electrical: 1,800 operations/hr
Humidity	40-85%
Weight	Approx: 14g
Safety Standard	UL cUL


■ Approved Standards

Model	Coil Rating	Safety Standard	Contact Rating
TRA1H	3 to 48VDC	UL/cUL	16A 250VAC 16A 30VDC


■ Engineering Data

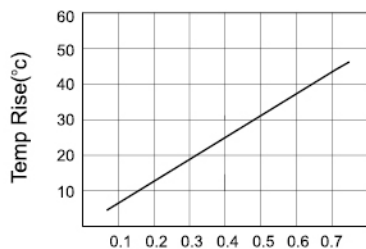


Coil Power(W)

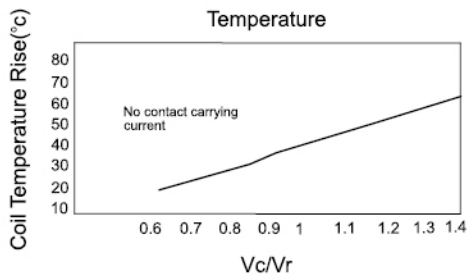

Vc/Vr

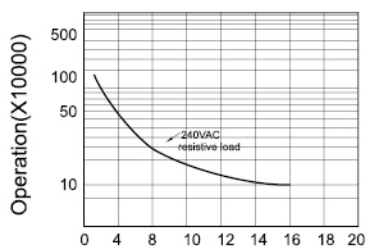


Contact Current(A)

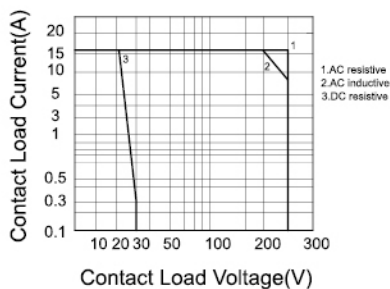


Contact Load Voltage(V)



Overall and Mounting Dimensions

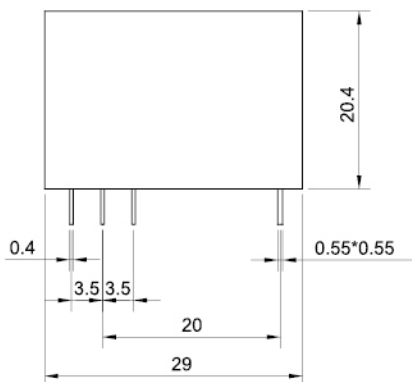


PCB Layout

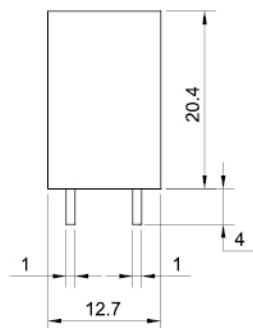

Wiring Diagram

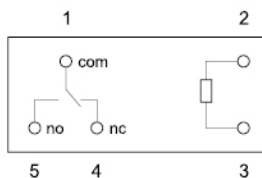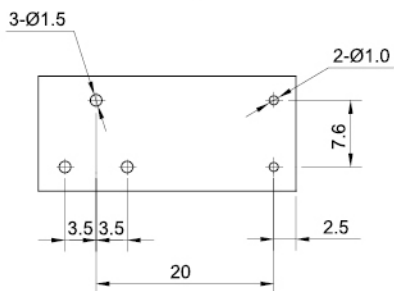

Form C

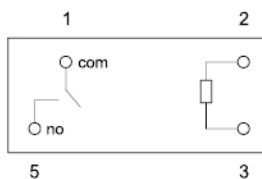

Form A

Remark:

- 1). In case the tolerance is not shown in outline dimension, the tolerance should be $\pm 0.2\text{mm}$ for outline dimension $\leq 1\text{mm}$; $\pm 0.3\text{mm}$ for outline dimension: $1\sim 5\text{mm}$ and $\pm 0.4\text{mm}$ for outline dimension $> 5\text{mm}$.
- 2). The tolerance without indication is always $\pm 0.1\text{mm}$ for the dimension of PCB layout.

Disclaimer:

These specifications are just for customers' reference and subject to change without notice.