
New Jersey Semi-Conductor Products, Inc.


20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Amplifier Transistor
NPN Silicon

MPS6571





CASE 29–04, STYLE 1
TO–92 (TO–226AA)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	20	Vdc
Collector–Base Voltage	V_{CBO}	25	Vdc
Emitter–Base Voltage	V_{EBO}	3.0	Vdc
Collector Current — Continuous	I_C	50	mAdc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	625 5.0	mW mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	1.5 12	Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage (I_C = 1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	20	—	—	Vdc
Collector–Base Breakdown Voltage (I_C = 100 μAdc, I_E = 0)	$V_{(BR)CBO}$	25	—	—	Vdc
Collector Cutoff Current (V_{CB} = 20 Vdc, I_E = 0)	I_{CBO}	—	—	50	nAdc
Emitter Cutoff Current ($V_{EB(off)}$ = 3.0 Vdc, I_C = 0)	I_{EBO}	—	—	50	nAdc

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

MPS6571

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic	Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS					
DC Current Gain (I_C = 100 μAdc, V_{CE} = 5.0 Vdc)	h_{FE}	250	—	1000	—
Collector–Emitter Saturation Voltage (I_C = 10 mAdc, I_B = 1.0 mAdc)	$V_{CE(sat)}$	—	—	0.5	Vdc
Base–Emitter On Voltage (I_C = 10 mAdc, V_{CE} = 5.0 Vdc)	$V_{BE(on)}$	—	—	0.8	Vdc
SMALL–SIGNAL CHARACTERISTICS					
Current–Gain — Bandwidth Product (I_C = 500 μAdc, V_{CE} = 5.0 Vdc, f = 20 MHz)	f_T	50	175	—	MHz
Output Capacitance (V_{CB} = 5.0 Vdc, I_E = 0, f = 1.0 MHz)	C_{obo}	—	—	4.5	pF
Noise Figure (I_C = 100 μAdc, V_{CE} = 5.0 Vdc, R_S = 10 k Ω, f = 100 Hz)	NF	—	1.2	—	dB

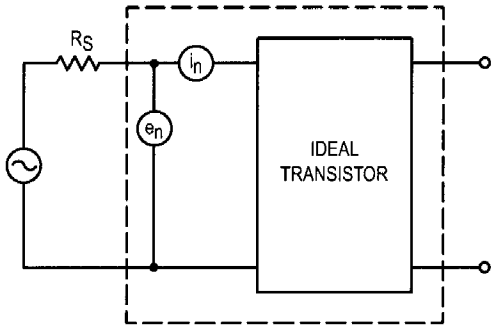


Figure 1. Transistor Noise Model