

## SPECIFICATION

Part No. : **AP.10G.01**

Product Name : 10mm SMT 14dB Active GPS Patch Antenna  
With Front End Saw Filter

Features : Unique SMT GPS active patch  
Wide Input Voltage 1.5V to 3.3V  
Ultra low power consumption  
**RoHS compliant**

Photo :




## 1. Introduction

The AP.10G.01 one stage 14dB active GPS patch antenna is the smallest SMT GPS high performance embedded antenna currently available in the world. Using extremely sensitive high dielectric constant powder formulation and tight process control the 10mm x 10mm x 4mm patch antenna is accurately tuned to have its frequency band right at 1575.42MHz for GPS systems.

A patented SMT structure gives high reliability in integration. With an ultra low power consumption one stage LNA with Saw Filter , this small active patch has the performance of an ordinary active patch, but at only a quarter of the size. This product is suited to small form factor mobile devices such as GPS Smartphones, Personal Location, Medical devices, Telematic devices and Automotive navigation and tracking. Custom gain, connector and cable versions are available.

The AP.10G consists of 2 functional blocks – the LNA and also the patch antenna.

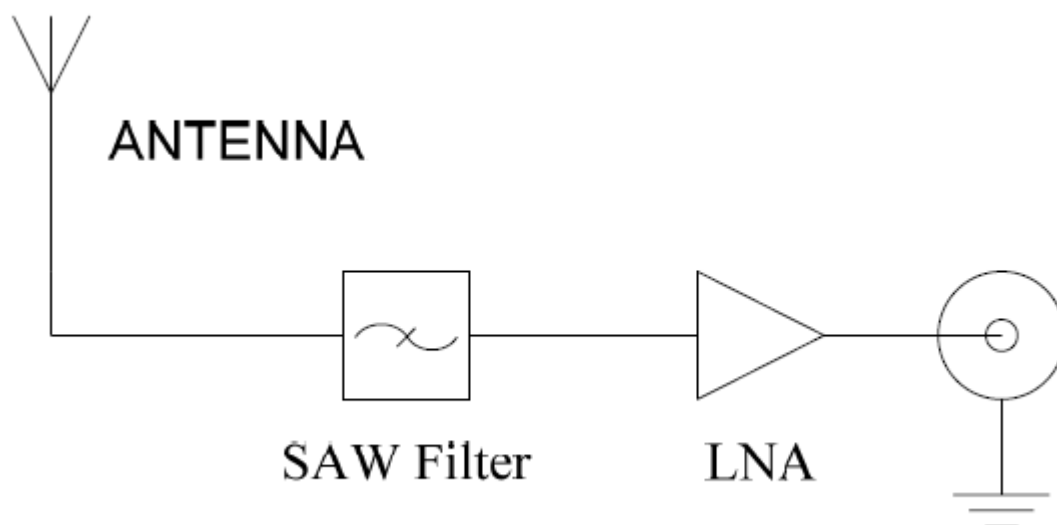

## 2. Specification

### 2.1 Patch Antenna

Parameter	Specification
Frequency	1575.42 ± 1.023MHz
Gain	Typ -10dBic @ Zenith
Impedance	50Ω
Polarization	RHCP
Axial Ratio	Max 4.0dB @ Zenith
Dimension	10mm x 10mm x 4mm (add 7.3mm depth for vertical PCB)


### 2.2 LNA

Parameter	Specification
Frequency	1575.42 ± 1.023MHz
Outer Band Attenuation	F0=1575.42MHz F0±30MHz 9dB min. F0±50MHz 14dB min. F0±100MHz 16dB min.
Output Impedance	50Ω
Output VSWR	2.0 Max
Pout at 1dB Gain Compression point	Typ. 1dBm
LNA Gain, Power Consumption and Noise Figure	
Voltage	LNA Gain (Typ) Power Consumption(mA) Typ Noise Figure Typ
Min. 1.5V	18dB 3.5mA 2.6dB
Typ. 1.8V	18dB 3.5mA 2.6dB
Max. 3.3V	18dB 3.5mA 2.6dB


### 2.3 Connection

Connection	SMT via solder pads
------------	---------------------

### 3. LNA Gain and Out Band Rejection @3.0V

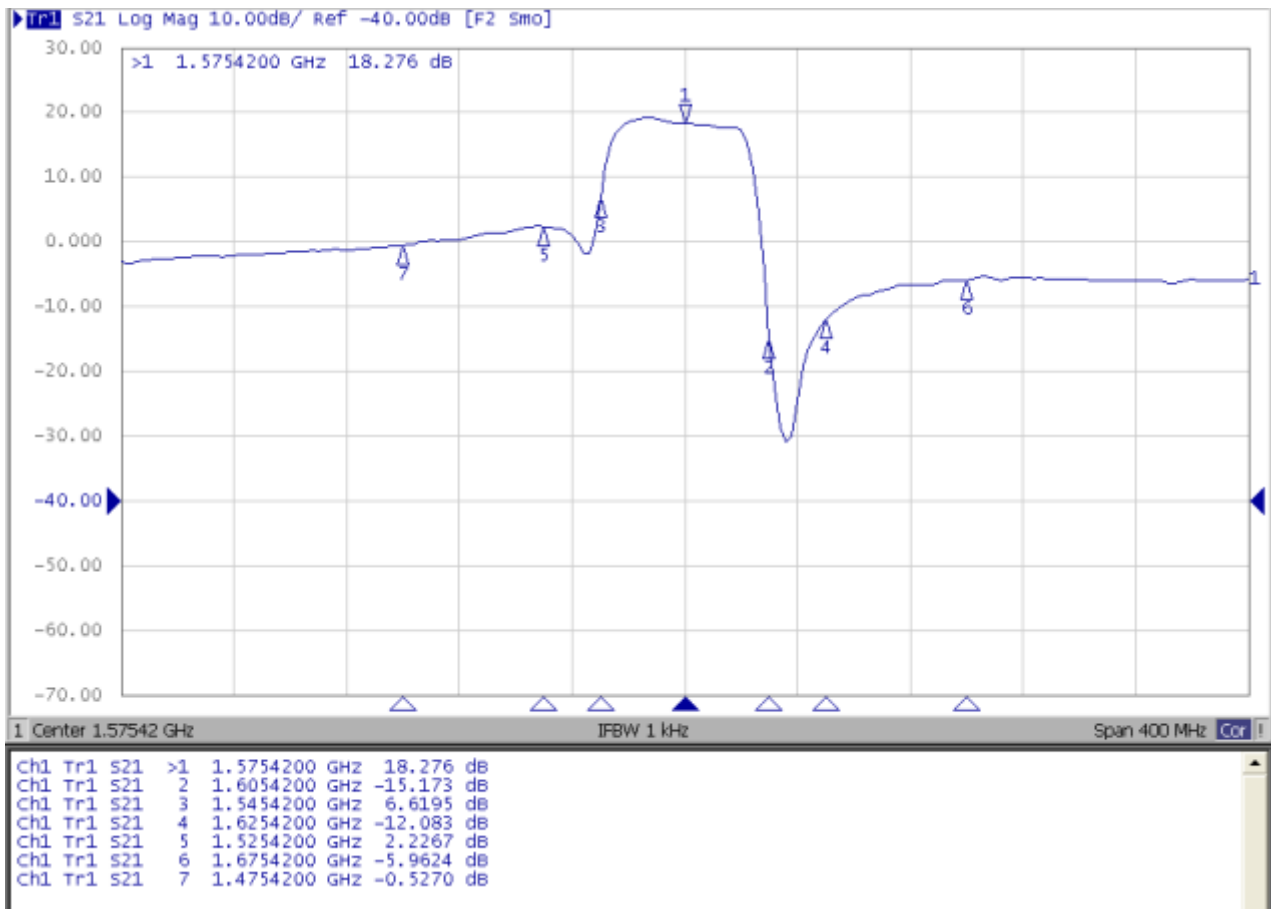

## 4. LNA Noise Figure @3.0V

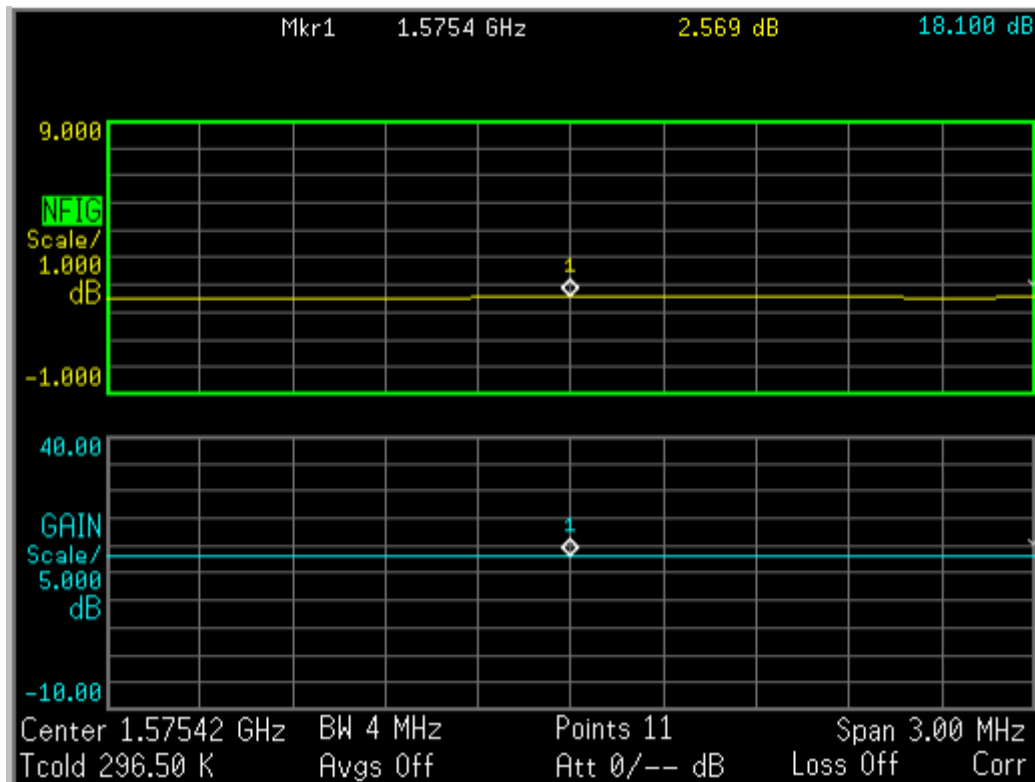


## 5. Total Specification

(through Antenna, LNA)


Parameter	Specification
Frequency	1575.42 ± 1.023MHz
Gain	8 ± 4dBic @ 90°
Output Impedance	50Ω
Polarization	RHCP
Output VSWR	Max 2.0
Operation Temperature	-20°C to + 85°C
Storage Temperature	-30°C to + 85°C
Relative Humidity	40% to 95%
Input Voltage	Min. 1.5V, Typ. 1.8V, Max. 3.3V

## 6. Radiation Patterns

### 6.1 XZ Plane

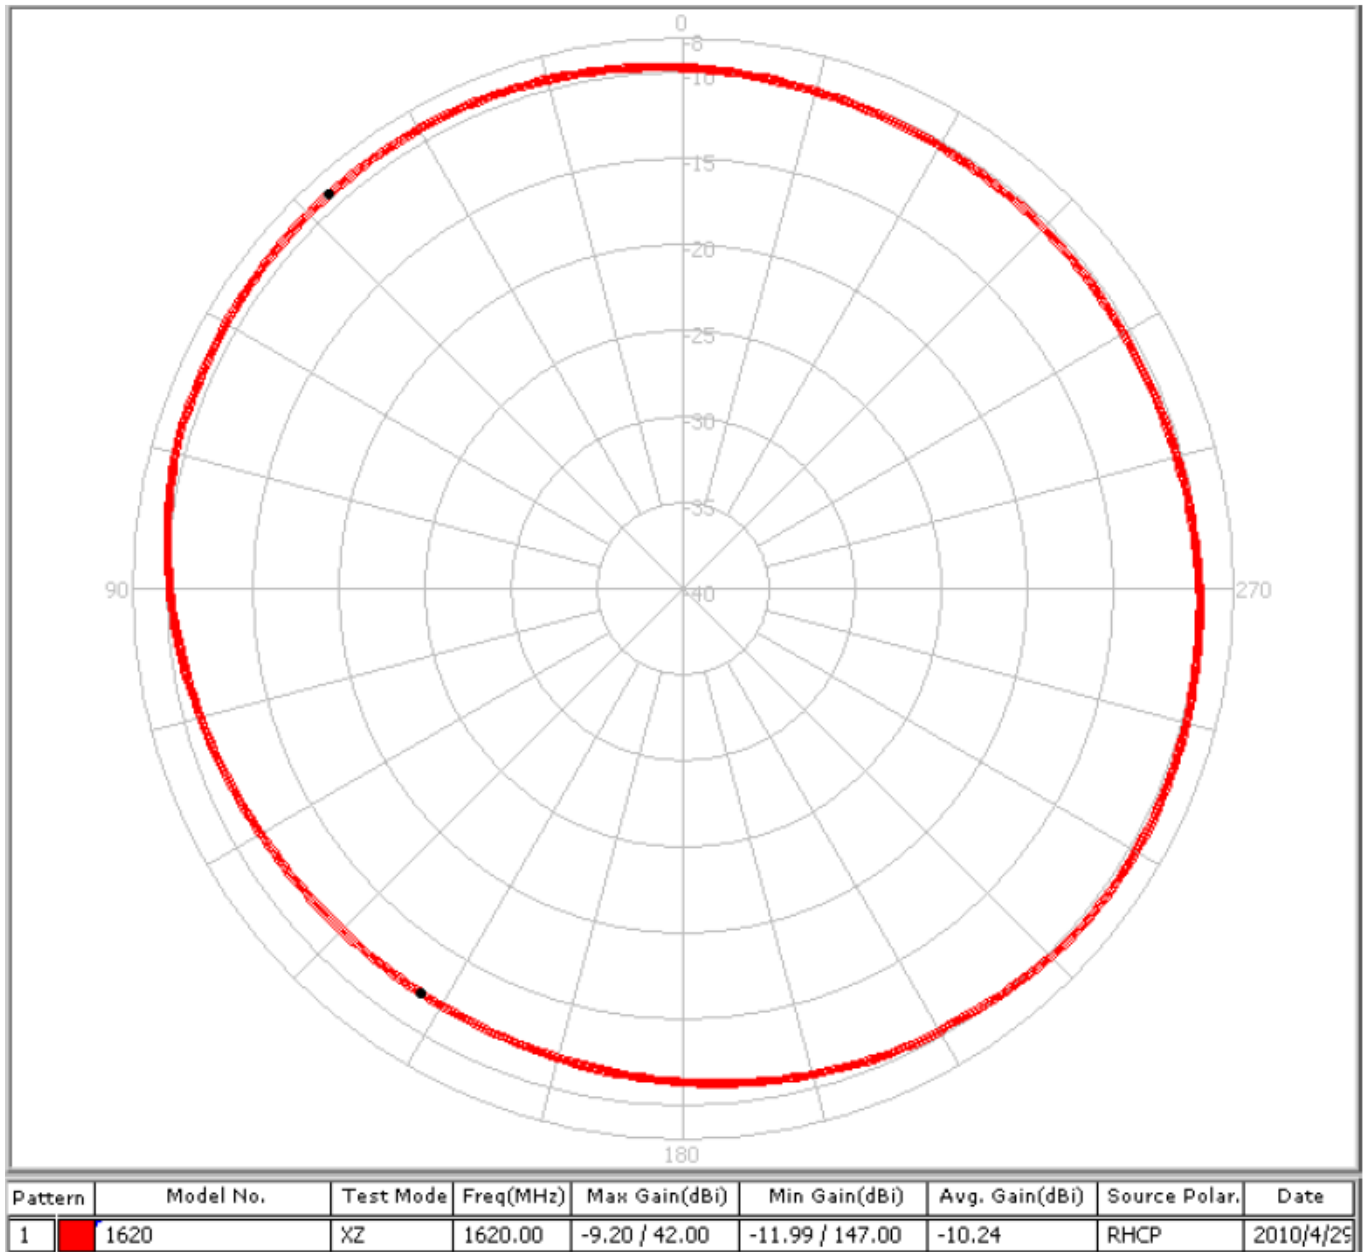


## 6.2 YZ Plane

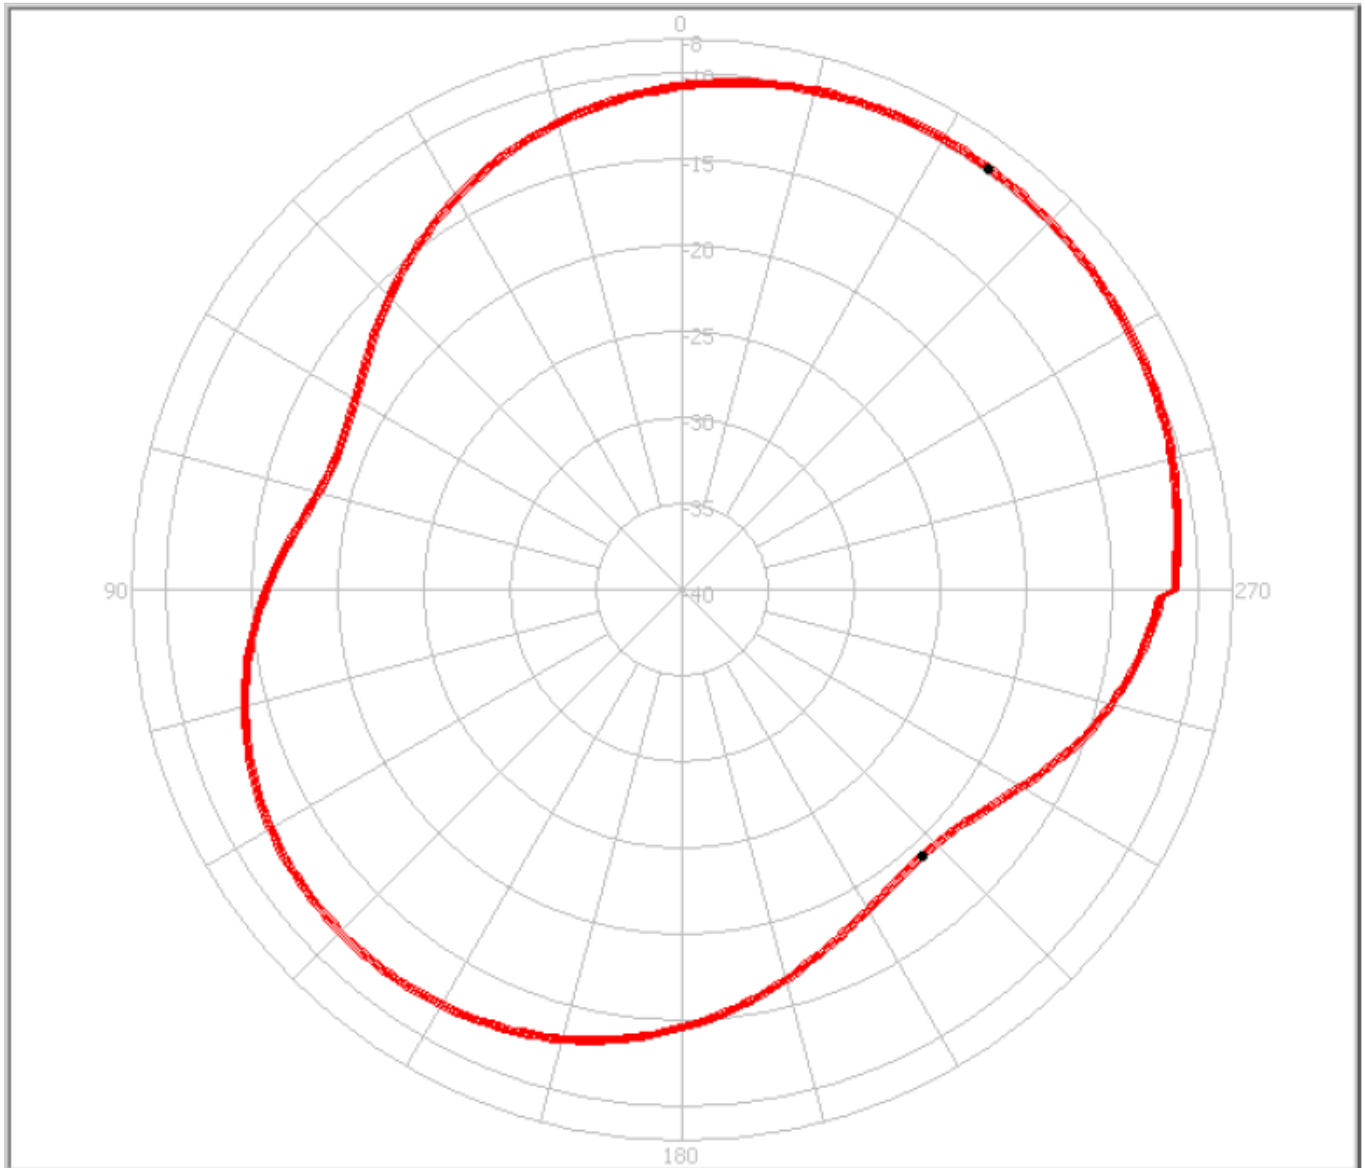

Pattern	Model No.	Test Mode	Freq(MHz)	Max Gain(dBi)	Min Gain(dBi)	Avg. Gain(dBi)	Source Polar.	Date
1	1620	YZ	1620.00	-9.73 / 324.00	-19.18 / 222.00	-12.80	RHCP	2010/4/29


### 6.3 XY Plane

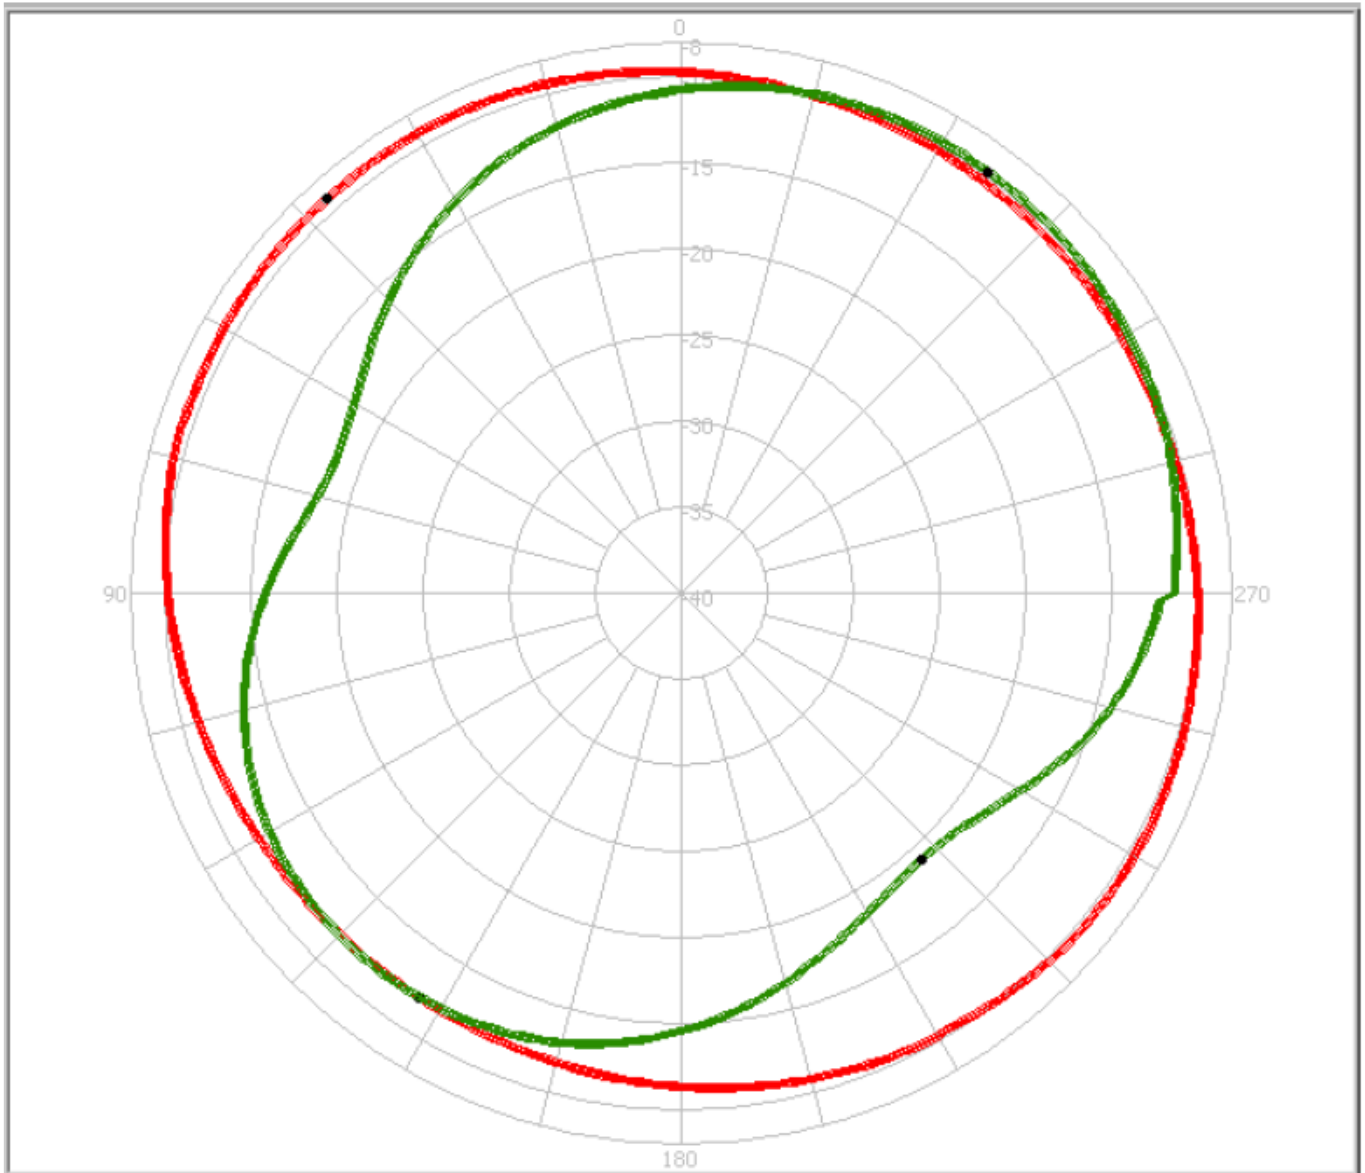

Pattern	Model No.	Test Mode	Freq(MHz)	Max Gain(dBi)	Min Gain(dBi)	Avg. Gain(dBi)	Source Polar.	Date
1	1620	XZ	1620.00	-9.20 / 42.00	-11.99 / 147.00	-10.24	RHCP	2010/4/29
2	1620	YZ	1620.00	-9.73 / 324.00	-19.18 / 222.00	-12.80	RHCP	2010/4/29



## 7. Technical Drawing

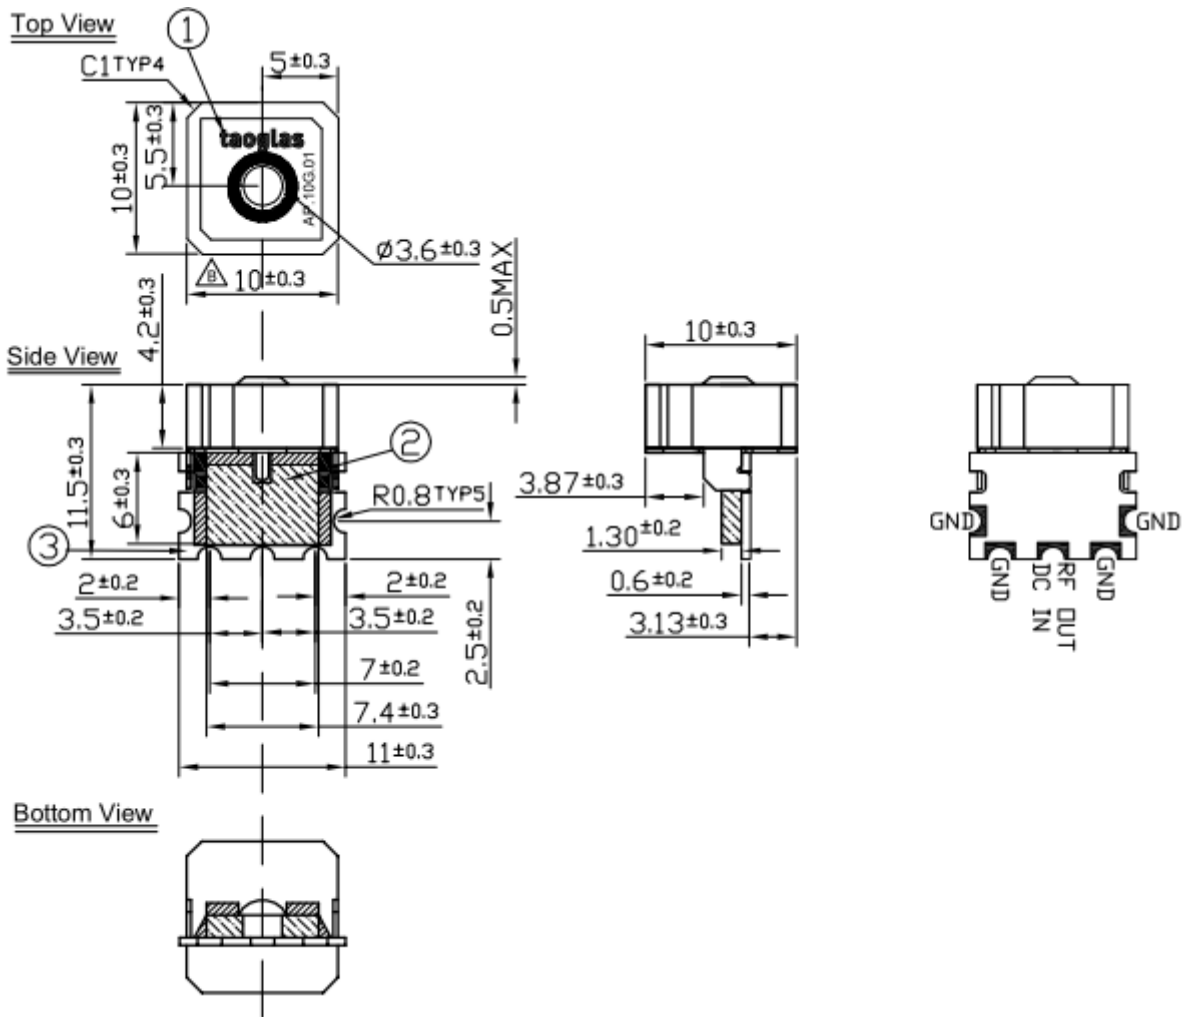



	Name	Material	Finish	QTY
1	Patch (10mmx10mmx4.2mm)	Ceramic	Clear	1
2	Shielding Case	Tin (SPTE)	Tin Plated	1
3	PCB	FR4 0.6t	Green	1

**Note:**






- 1.Soldered Area
- 2.Solder Mask Area(Green)
- 3.Clearance Area
- 4.Shielding Case Area
- 5.Area to be solder (Pad)

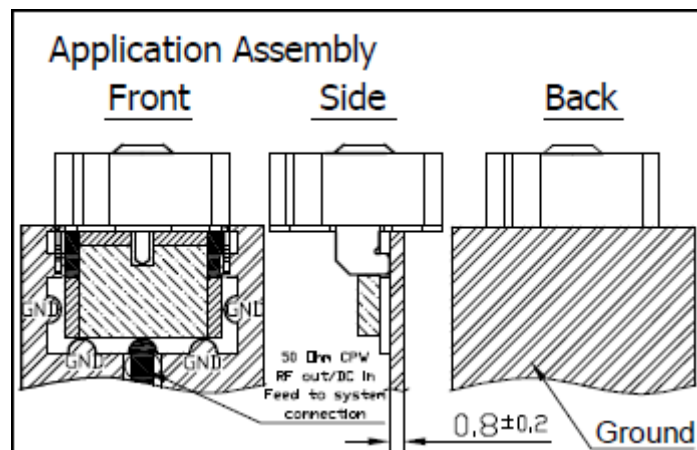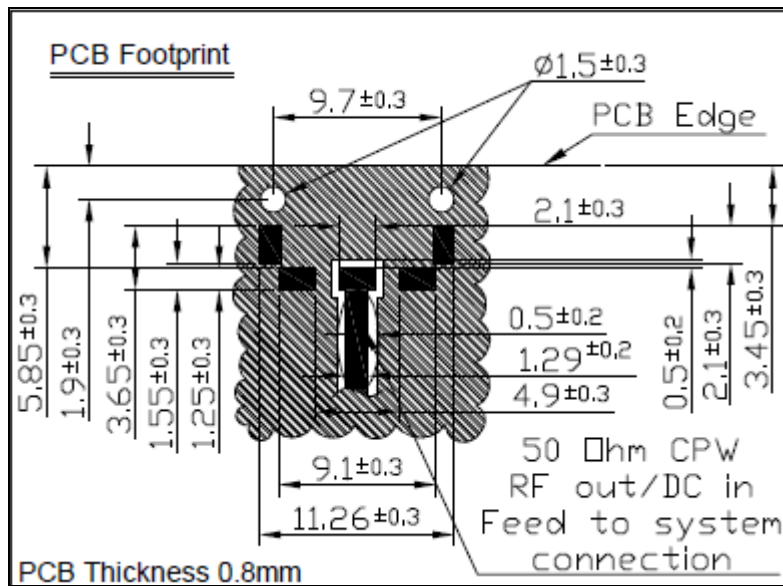

## 7.1 PCB Footprint



**Note:**


- 1. Soldered Area 
- 2. Solder Mask Area (Green) 
- 3. Clearance Area 
- 4. Shielding Case Area 
- 5. Area to be solder (Pad) 

## 8. Recommended Reflow Soldering Profile

AP.10G can be assembled following Pb-free assembly. According to the Standard IPC/JEDEC J-STD-020C, the temperature profile suggested is as follow:

Phase	Profile Features	Pb-Free Assembly (SnAgCu)
PREHEAT	Temperature Min( $T_{smin}$ )	150°C
	Temperature Max( $T_{smax}$ )	200°C
	Time( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120 seconds
RAMP-UP	Avg. Ramp-up Rate ( $T_{smax}$ to TP)	3°C/second(max)
REFLOW	Temperature( $T_L$ )	217°C
	Total Time above $T_L$ ( $t_L$ )	30-100 seconds
PEAK	Temperature( $T_P$ )	260°C
	Time( $t_p$ )	2-5 seconds
RAMP-DOWN	Rate	3°C/second(max)
Time from 25°C to Peak Temperature		8 minutes max.
Composition of solder paste		96.5Sn/3Ag/0.5Cu
Solder Paste Model		SHENMAO PF606-P26

The graphic shows temperature profile for component assembly process in reflow ovens

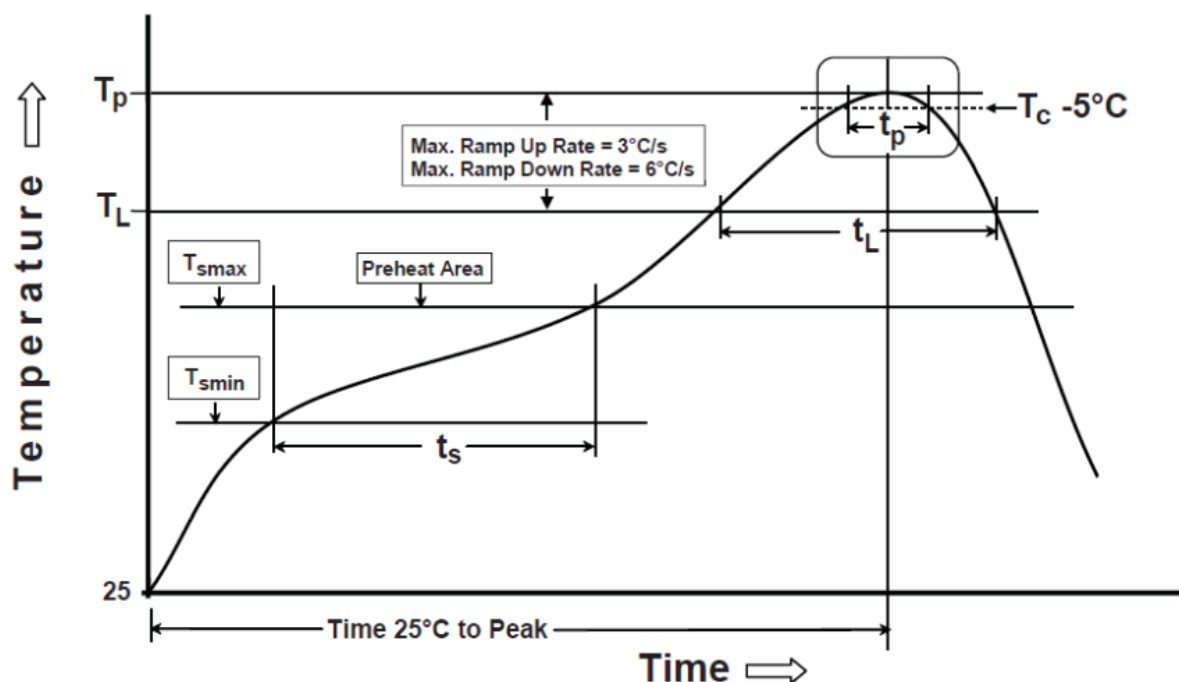

Soldering Iron condition: Soldering iron temperature 270°C±10°C.

Apply preheating at 120°C for 2-3 minutes. Finish soldering for each terminal within 3 seconds, if soldering iron temperature over 270°C±10°C or 3 seconds, it will make cause component surface peeling or damage.

## 9. Packaging

Packaged on Tape and Reel – 250 pieces per reel

Each Reel is packaged – Inner Carton

Outer Carton contains 5 Reels – 1250 pieces per Carton

