2019-03-15
Product version 01
Document revision 00

Data sheet

Order No.: 1717027

Type: PC 6/ 3-GL2-7,62

PCB headers


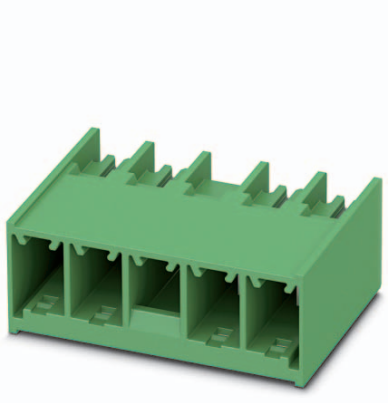


Figure shows a 4-pos. version with locking flange at position 3

1 Main features



- No. of pos. 3
- Nominal cross section 6 mm²
- Color black (9005)
- Pitch 7.62 mm
- Mounting type Wave soldering
- Nominal current 41 A
- Nominal voltage 630 V
- Connection direction 0 °
- Type of packaging

2 Your advantages

- Increased touch protection in the pin connector pattern for maximum safety even when not plugged in
- Easy PCB replacement thanks to plug-in modules
- Well-known mounting principle allows worldwide use

Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1717027

© PHOENIX CONTACT 2019

3 Table of contents

1 Main features ... 1
2 Your advantages ... 1
3 Table of contents ... 2
4 3D model in PDF can be activated (Acrobat Reader only) ... 3
5 General Technical Data ... 4
5.1 item properties ... 4
6 Material properties ... 4
6.1 Material of metal parts ... 4
7 Dimensions ... 5
7.1 Dimensions for the product ... 5
8 Series drawing ... 6
9 Application ... 7
10 Packaging information ... 7
10.1 Temperature limit values ... 7
11 Mechanical tests ... 8
12 Electrical tests ... 9
12.1 Electrical data ... 9
12.2 Air and creepage distances ... 9
13 Current carrying capacity/derating curves ... 10
13.1 Vibration test ... 10
14 Approvals ... 10
15 Commercial Data ... 11
16 corresponding plugs ... 11
17 Accessories ... 11
18 Combination tests ... 12

© PHOENIX CONTACT 2019

4 3D model in PDF can be activated (Acrobat Reader only)



© PHOENIX CONTACT 2019

5 General Technical Data

5.1 item properties

Order No.	1717027
Type	PC 6/ 3-GL2-7,62
Plug-in system	POWER COMBICON 6
Product type	PCB headers
Range of articles	PC 6/..-GL
Pitch	7.62 mm
Range of positions	2...6
Number of positions	3
Number of levels	1
Number of connections	3
Number of potentials	3
Type of locking	Snap-in locking
	Self-locking flange
Mounting type	Wave soldering
Solder pins per potential	3

6 Material properties

6.1 Material of metal parts

Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (1.3 - 3 µm Ni) , Tin (2 - 4 µm Sn)
Soldering area surface	Nickel (1.3 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Surface characteristics	Tin-plated

Insulating material data	Housing
Insulating material	PA GF
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	black (9005)

© PHOENIX CONTACT 2019


7 Dimensions

7.1 Dimensions for the product

Length	28.2 mm
Width	30.88 mm
Height (without solder pin)	13.5 mm
Total height	16.1 mm
Solder pin [P]	2.6 mm
Dimension a	

© PHOENIX CONTACT 2019

8 Series drawing

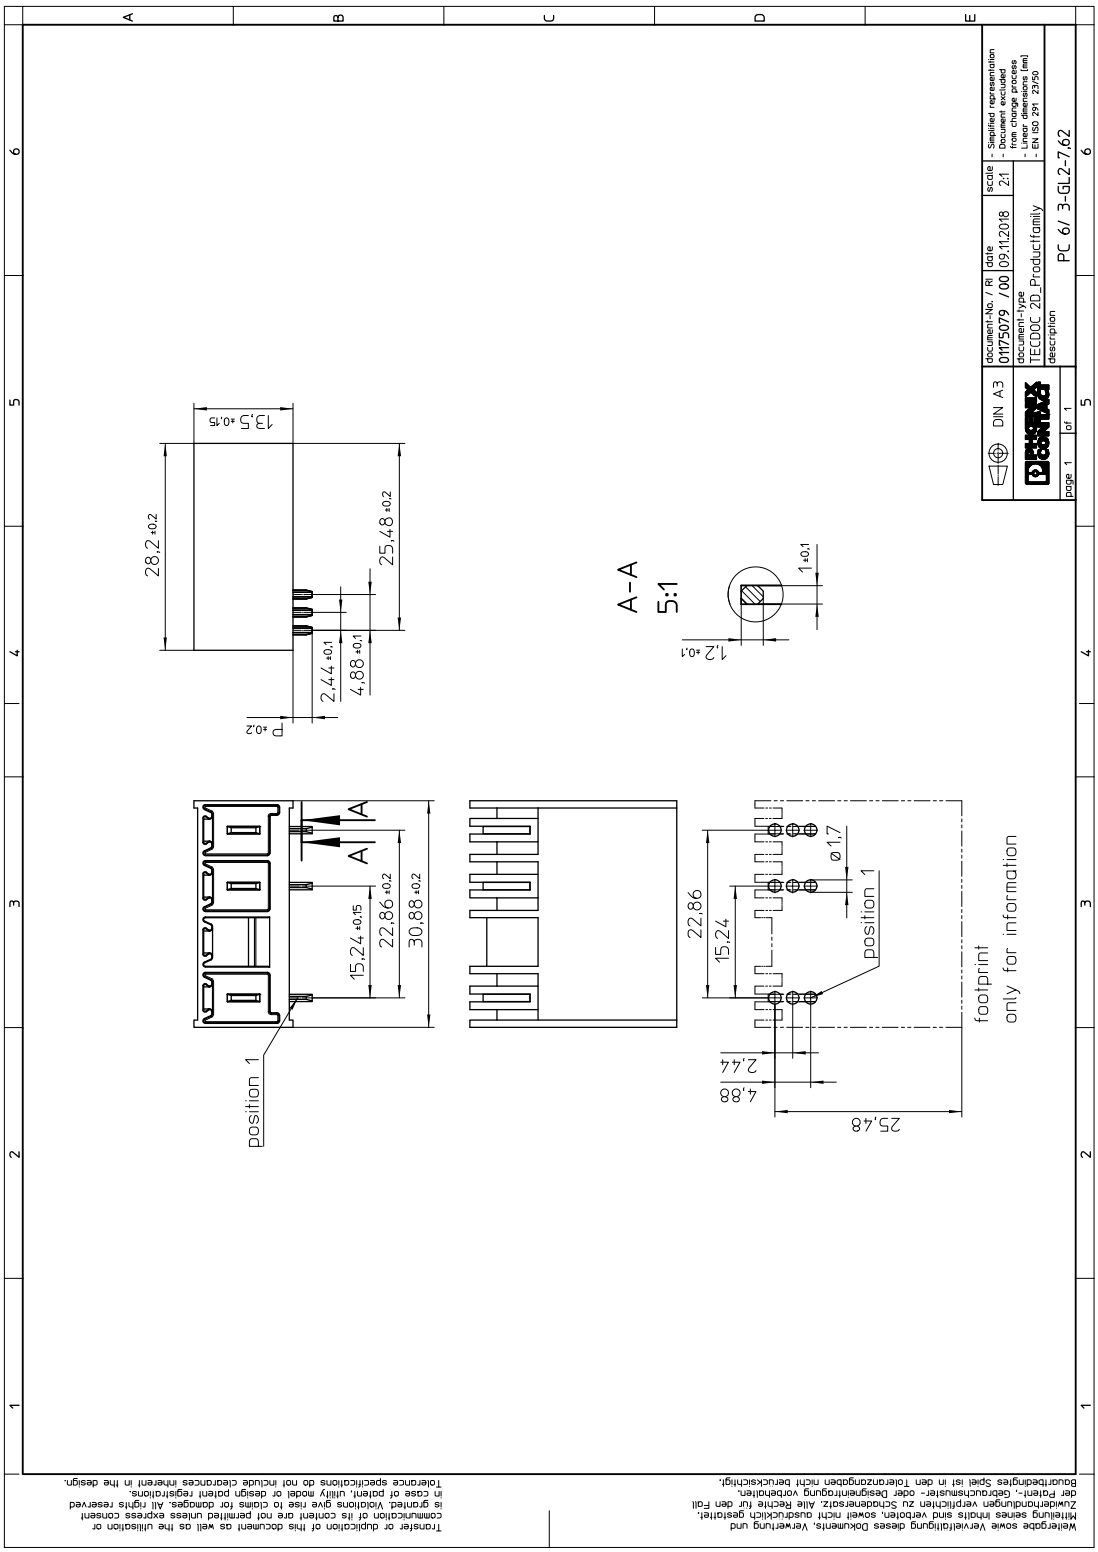

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations. Tolerance specifications do not include clearances inherent in the design.

© PHOENIX CONTACT 2019

9 Application

10 Packaging information

Pieces per package	50

10.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

© PHOENIX CONTACT 2019

11 Mechanical tests

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	11 N
Withdraw strength per pos. approx.	10 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	20 N

© PHOENIX CONTACT 2019

12 Electrical tests

12.1 Electrical data

Rated current / conductor cross section	41 A 6 mm²
Rated insulation voltage (III/2)	630 V
Rated surge voltage (III/2)	6 kV
Contact resistance	0.5 mΩ
Degree of pollution	2

12.2 Air and creepage distances


Component	Header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	630 V	630 V	1000 V
Rated surge voltage	6 kV	6 kV	6 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	5.5 mm	5.5 mm	5.5 mm
Minimum value of the creepage path requirement in acc. with table	8 mm	3.2 mm	5 mm

© PHOENIX CONTACT 2019

13 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	6 mm²

Type: LPC 6/...-STL...-7,62 with PC 6/...-GL...-7,62

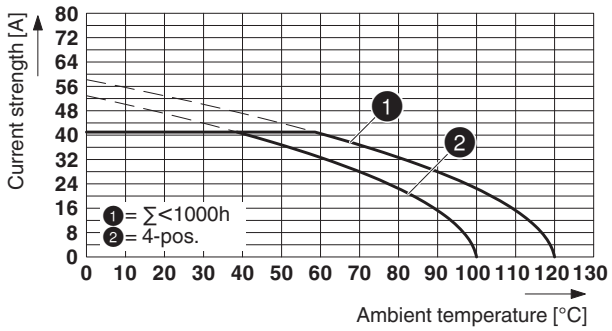

Insulation resistance	
Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 4 TΩ

13.1 Vibration test

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

14 Approvals

cULus Recognized				
Use group	F	B	C	
mm²/AWG/kcmil				
Voltage	600 V	300 V	300 V	
Current	35 A	35 A	35 A	

© PHOENIX CONTACT 2019

15 Commercial Data

Order No.	1717027
Type	PC 6/ 3-GL2-7,62
Pieces per package	50
Net weight	88 g
GTIN	4055626536316
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

16 corresponding plugs


Order No.	Type
1716931	LPC 6/ 3-STL2-7,62


17 Accessories

Description	Order No.	Type
Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red	1701967	CP-PC RD

© PHOENIX CONTACT 2019

18 Combination tests





PC 6/..-GL	LPC 6/..-STL2
IEC 61984	IEC 61984
Mechanical tests (A)	
Insertion/withdrawal force per position	approx. 11 N / 10 N
Polarization when inserted Requirement >20 N	Test passed
Contact holder in insert Requirements >20 N	Test passed
Durability tests (B)	
Contact resistance R_1	0.5 mΩ
Insertion/withdrawal cycles	25
Contact resistance R_2	0.5 mΩ
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs)	7.3 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	3.31 kV
Thermal tests (C)	
Tested number of positions	4
Tested conductor cross section	6 mm^2
Test current	41 A
Upper limiting temperature Requirements < 100°C	Test passed
Climatic tests (D)	
Test sequence 1: low temperature storage	-40 °C/2 h
Test sequence 2: heat storage	100 °C/168 h
Test sequence 3: noxious gas storage (ISO 6988)	0.2 dm^3 SO_2 on 300 dm^3/ 40 °C/1 cycle
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs)	7.3 kV
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	3.31 kV
Environmental and endurance tests (E)	
Specification	IEC 61984:2008-10
Degree of protection	Finger safety with IP20 test finger

© PHOENIX CONTACT 2019