


适用扁平线(Applicable Flat Cable)

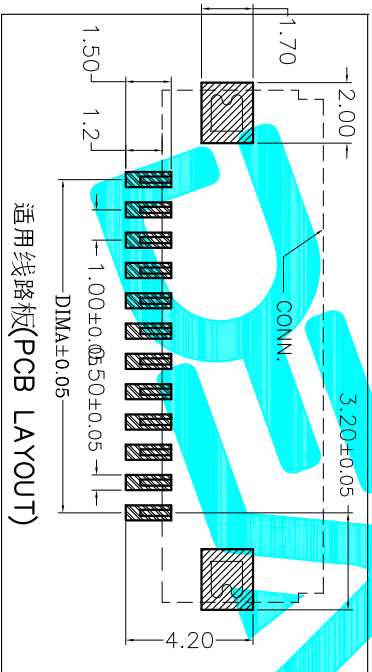

通用线路板(PCB LAYOUT)

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象
 2. 温度范围：-25°C~85°C.
 3. 额定电压：50V·AC/DC(等效).
 4. 接触电阻：≤0.03Ω
 5. 绝缘电阻：≥500MΩ
 6. 产品料号：

FC10-S XX FCT-00
NO OF CKT(PIN)

SERIAL NUMBER

CKT	DIMA	DIMB	DIMC
4	3.00	5.10	8.90
5	4.00	6.10	9.90
6	5.00	7.10	10.90
7	6.00	8.10	11.90
8	7.00	9.10	12.90
9	8.00	10.10	13.90
10	9.00	11.10	14.90
11	10.00	12.10	15.90
12	11.00	13.10	16.90
13	12.00	14.10	17.90
14	13.00	15.10	18.90
15	14.00	16.10	19.90
16	15.00	17.10	20.90
17	16.00	18.10	21.90
18	17.00	19.10	22.90
19	18.00	20.10	23.90
20	19.00	21.10	24.90
21	20.00	22.10	25.90
22	21.00	23.10	26.90
23	22.00	24.10	27.90
24	23.00	25.10	28.90
25	24.00	26.10	29.90
26	25.00	27.10	30.90
27	26.00	28.10	31.90
28	27.00	29.10	32.90
29	28.00	30.10	33.90
30	29.00	31.10	34.90
32	31.00	33.10	36.90

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS	DATE
DRAWN G.M.Chen	2015/7/17
CHECKED	
APPROVALS	

TOLERANCES ARE	30 ^{±0.15}	±0.30	ANGLE	±2°
	10 ^{±0.10}	±0.20		
	5 ^{±0.05}	±0.15		

PART NO.	SCALE: 1:1	SHEET 1 OF 1
FC10-SXXFCT-00		
FPC CONNECTOR		
ELECTRONICS CO.,LTD		
DRAWING NO.		PROJ.

