



2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS

TECHNICAL DATA SHEET

PE321-72

2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS

Configuration

Connector 1	2.92mm Male
Connector 1 Specification	MIL-STD-348
Connector 2	2.92mm Female
Connector 2 Specification	MIL-STD-348
Cable Type	VNA Cable

Electrical Specifications

Frequency Range, GHz	DC to 40
Impedance, Ohms	50
Maximum VSWR	1.38:1
Velocity of Propagation, %	77
Dielectric Withstanding Voltage (AC), Vrms	1,000

Typical Electrical Specifications

Frequency 1

Frequency, GHz	10
VSWR	1.12:1
Return Loss, dB	25
Insertion Loss	0.43 dB/ft [1.41 dB/m]

Frequency 2

Frequency, GHz	18
VSWR	1.17:1
Return Loss, dB	22
Insertion Loss	0.59 dB/ft [1.94 dB/m]

Frequency 3

Frequency, GHz	26.5
VSWR	1.22:1
Return Loss, dB	20
Insertion Loss	0.72 dB/ft [2.36 dB/m]

Frequency 4

Frequency, GHz	40
VSWR	1.38:1
Return Loss, dB	16
Insertion Loss	0.9 dB/ft [2.95 dB/m]

Mechanical Specifications

Cable Assembly

Cable Type	VNA Cable
------------	-----------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS PE321-72](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS

TECHNICAL DATA SHEET

PE321-72

Temperature

Temperature Operating Range, deg C -55 to +165

Size

Length, in [cm] 72 [182.88]
 Diameter, in [mm] 0.362 [9.19]

Cable

Center Conductor Type Solid
 Cable Inner Conductor Copper, Silver
 No of Shields 2
 Dielectric Type PTFE
 Jacket Material FEP

Connector 1

Type 2.92mm Male
 Configuration Straight
 Inner Conductor Material and Plating Gold
 Coupling Nut Material and Plating Passivated Stainless Steel
 Hex Size, in. 5/16
 Torque, in-lbs [Nm] 8 [0.9]
 Body Material and Plating Passivated Stainless Steel
 Dielectric Type PPO

Connector 2

Type 2.92mm Female
 Configuration Straight
 Inner Conductor Material and Plating Gold
 Body Material and Plating Passivated Stainless Steel
 Dielectric Type PPO

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS PE321-72](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





2.92mm Male to 2.92mm Female Test Cable 72 Inch
Length Using VNA Cable Coax, RoHS

TECHNICAL DATA SHEET

PE321-72

Plotted and Other Data

Notes:

Values at 25 °C, sea level

2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Female Test Cable 72 Inch Length Using VNA Cable Coax, RoHS PE321-72](http://www.pasternack.com/2.92mm-male-2.92mm-female-vna-cable-cable-assembly-pe321-72-p.aspx)


URL: <http://www.pasternack.com/2.92mm-male-2.92mm-female-vna-cable-cable-assembly-pe321-72-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE321-72 CAD Drawing

2.92mm Male to 2.92mm Female Test Cable 72 Inch
Length Using VNA Cable Coax, RoHS

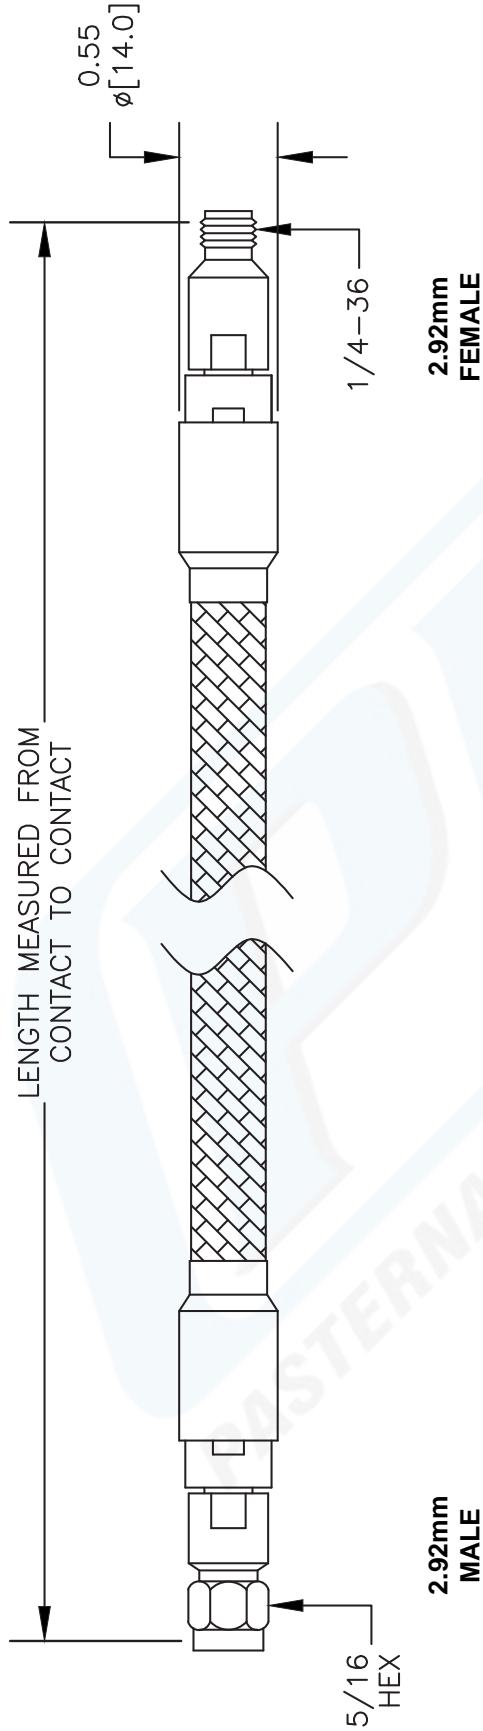

Part Number Configuration		How To Order	
PE3	ZZZ YY - xx uu	Part # Ext.	Length In Inches
00 - 99999		-12	12"
LF = RoHS Compliant		-24	24"
< Blank > = Standard		-36	36"
Note: LF applies only to RF cables		-48	48"
		-60	60"
		-xx	Custom Length
		Part # Ext.	Length In Centimeters
		-25CM	25Cm
		-50CM	50Cm
		-75CM	75Cm
		-100CM	100Cm
		-125CM	125Cm
		-xxCM	Custom Length

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE321

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919	CAD FILE 012111	SCALE N/A	SIZE A	2283
----------------	-----------------	-----------	--------	------