
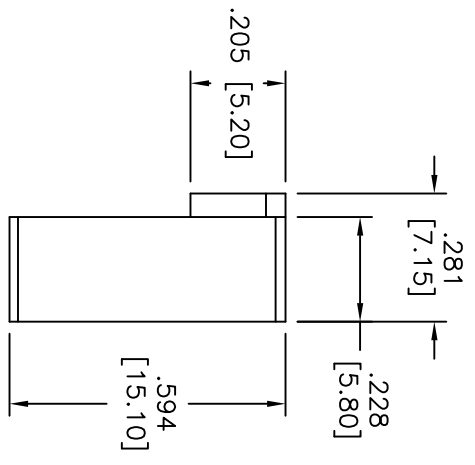
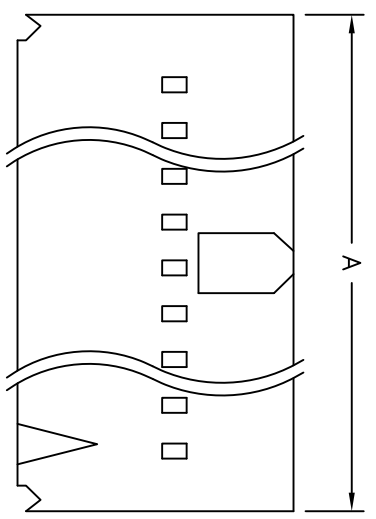


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/31/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

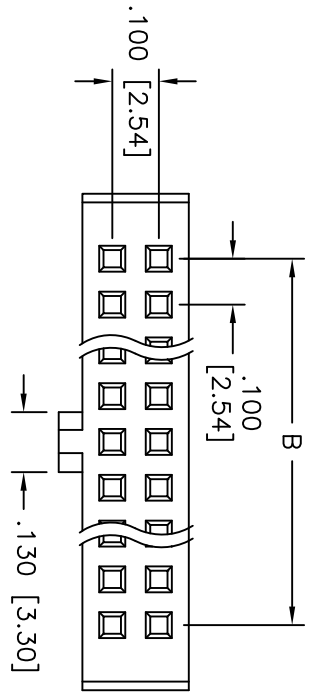

**SPECIFICATIONS:**

- Material: Insulator: PBT, rated UL 94V-0
- Electrical: Operating voltage: 250 VAC max  
Current rating: 3 Amps max.  
Insulation resistance: 1000 Mohms min  
Dielectric withstanding voltage: 800 VAC for 1 minute
- Mechanical: Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.

Poles: 6 thru 72  
 A = .100 [2.54] X No. of Spaces + .281 [7.14]  
 B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.100 [2.54] CRIMP TERMINAL HOUSING**



APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MTFA-XX	-
REF: S0072T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1