03 0308 C 02

Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP67/IP68

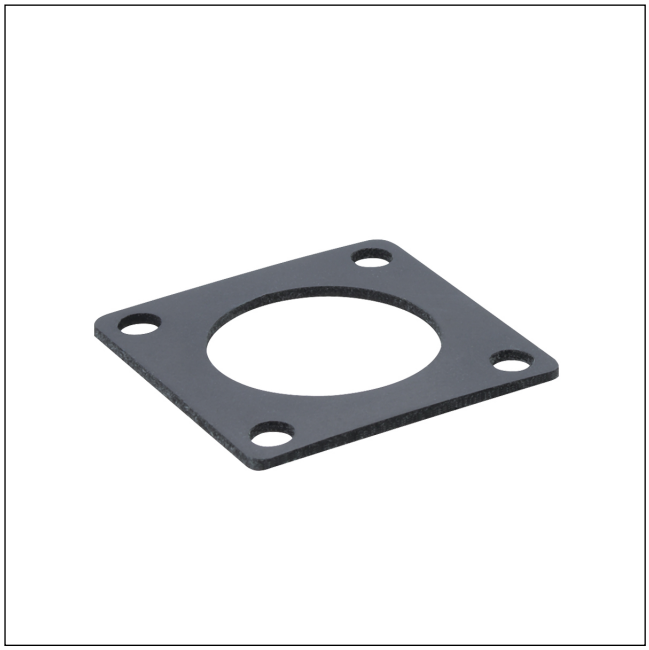

Flat gasket for flange chassis plugs and sockets

03 0308 C 02

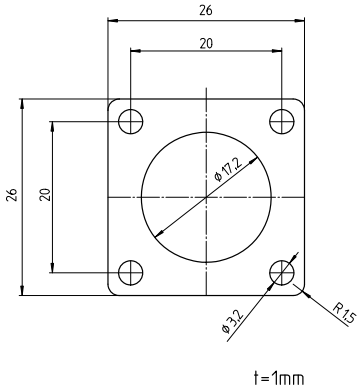

Environmental conditions

Temperature range	-40 °C/+85 °C

Materials

Seal	NBR

Connectable conductors for IDT area

Section max.	0,25/0,75 mm² (AWG 24/20)

Electrical data (at T_{amb} 20 °C)

Rated current	3/5 A
Rated voltage	60/250 V AC

Associated products

Accessories

0308	0308	0308-1
0308-1	0308-2	0308-2
0318	0318	0318-1
0318-1	0318-2	0318-2
036297	036297	

03 0308 C 02

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0308 C 02 VP15	-	250	250

Packaging:
in a cardboard box