

R/A JACK RECEPTACLE FOR PCB

SOLDER LEGS


R114.665.000

Series : **SMB**

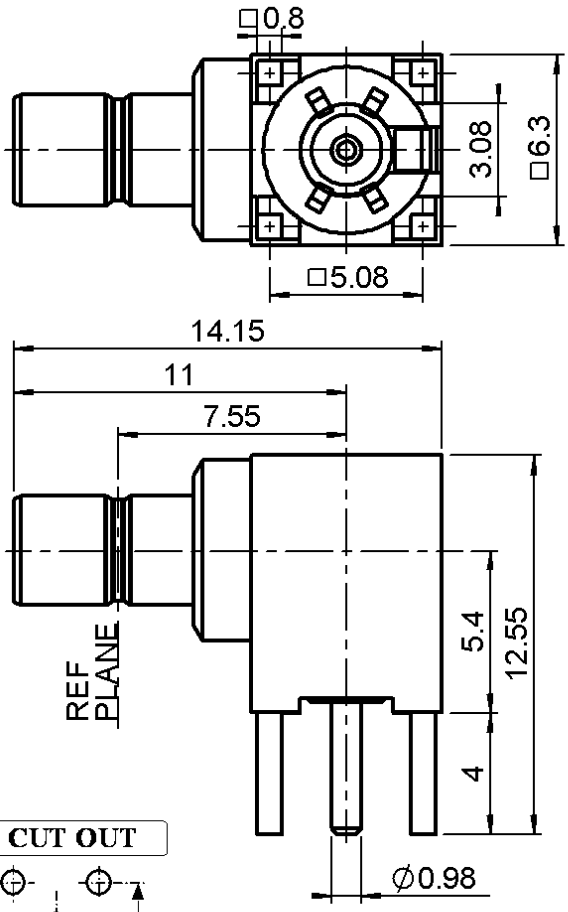


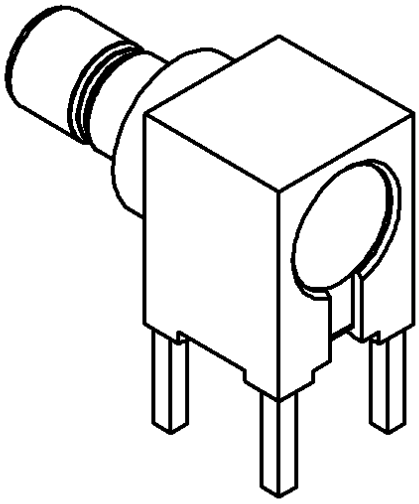


PANEL CUT OUT



	mm	
	Maxi	mini
A	1.4	1.3
B	5.13	5.03



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
CENTER CONTACT	**BRASS**	**GOLD 1.3 OVER NICKEL2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
-	-	-
-	-	-

Issue : 0706 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL

R/A JACK RECEPTACLE FOR PCB

SOLDER LEGS

R114.665.000

Series : **SMB**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

SPECIFICATION

QAE 06-02 - -

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**1.20*** +	**0,0000**	x F(GHz) Maxi
Insertion loss		**0.25***	√F(GHz) dB Maxi
RF leakage	- (	**57**	- F(GHz)) dB Maxi
Voltage rating		**500**	Veff Maxi
Dielectric withstanding voltage		**1000**	Veff mini
Insulation resistance		**1000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-65/+165**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

OTHER CHARACTERISTICS

Assembly instruction **NA**

Others :
* coaxial transmission line only

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**10**	N mini
Axial force – Opposite end	**10**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**500**	Cycles mini
Weight	**2,8300**	g

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL