

# Legacy NMA2411-B2T 10 MHz to 1500 MHz



## Specifications

RF Frequency	10 MHz to 1500 MHz
Noise Output	82.2 dB ENR
Noise Spectral Density ( $N_o$ )	-91.8 dBm/Hz Min
Flatness	2 dB P-P Max
Peak Factor	5:1
Bias Voltage	12 V
Supply Current	350 mA Max
Impedance	50 ohms

## Package and Connectivity


Construction	Coaxial
Package Type	T Package
Connector Type	SMA(f)

## Environmental

Operating Temperature	-30 to 85 °C
Storage Temperature	-65 to 125 °C

## Notes

Option TTL

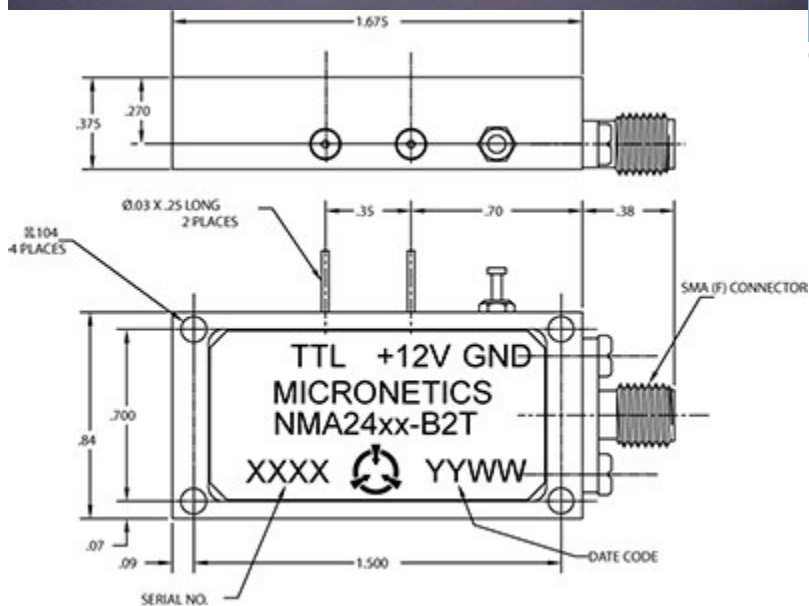

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

