

980/1550(1585)NM WDM/TAP COUPLER/ISOLATOR HYBRID COMBINATION

WTIH1598 Series

Product Description

Oplink's WTIH is a combination of a wavelength division multiplexer, tap coupler and an isolator in a compact package. This product has an extremely low insertion loss, and a very stable tap-coupling ratio. Fiber optic amplification is the ideal application for this product.

Oplink can provide customized designs to meet specialized feature applications. Also, Oplink offers modular assemblies that integrate other components to form a full function module or subsystem.



Performance Specification

WTIH1598 Series			Single Stage	Dual Stage	Unit	
Operating Wavelength Range		Signal Channel		C band : 1528 ~ 1564 or L band : 1570 ~ 1605	nm	
		Pump Channel		965 ~ 995	nm	
Insertion Loss ^[1]		Signal Port		< 1.4	< 1.5	dB
		Pump Port		< 0.6		
		Tap Port	1% Tap Ratio	19.2 ~ 21.0		dB
			2% Tap Ratio	16.2 ~ 18.0		
			5% Tap Ratio	12.2 ~ 14.0		
10% Tap Ratio	9.6 ~ 10.8					
Wavelength Dependent Loss		Signal to Common		< 0.5	< 0.5	dB
Wavelength Isolation		Signal to Common @ Pump Wavelength Range		> 30		dB
		Pump to Common @ Signal Wavelength Range		> 12		
Reverse Direction Isolation (over signal wavelength range, 0~70°C, all SOP)		Common to Signal		> 21	> 36	dB
Polarization Dependent Loss				< 0.1	< 0.2	dB
Polarization Mode Dispersion (standard)				< 0.25	< 0.05	ps
Directivity				≥ 55		dB
Return Loss				≥ 50		dB
Maximun Power Handling				≤ 500		mW
Operating Temperature				0 to +70		°C
Storage Temperature				-40 to +85		°C
Fiber Type		Signal & Tap Ports		Corning SMF-28		
		Common & Pump Ports		Corning HI1060		
Package Dimension ^[3]				P2 : (Ø) 5.5 x (L) 40.0		mm

Values are referenced without connector loss

^[1] The maximum IL is under all states of polarization and within the full operating temperature and wavelength ranges specified. Add 0.3dB on signal port IL for 10% tapping case.

^[2] All the parameters are excluding connectors.

^[3] The mechanical tolerance should be +/-0.2mm on all package dimensions unless otherwise custom specified.



Features

- ◆ Wide Operating Wavelength Range
- ◆ Compact Size
- ◆ High Isolation
- ◆ Ultra Low PDL & PMD
- ◆ High Stability & Reliability
- ◆ Epoxy-free Optical Path

Applications


- ◆ Fiberoptic Amplifiers
- ◆ CATV Fiberoptic Links
- ◆ WDM Systems
- ◆ Fiberoptic Instruments
- ◆ Transmitters and Fiber Lasers
- ◆ Laboratory R&D

Mechanical Drawing / Package Dimensions (dimension in mm)

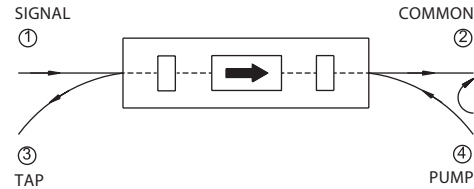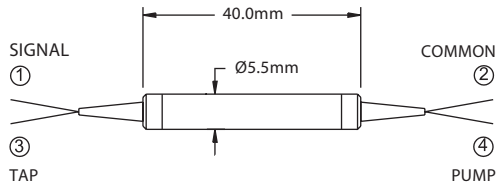

Ordering Information

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

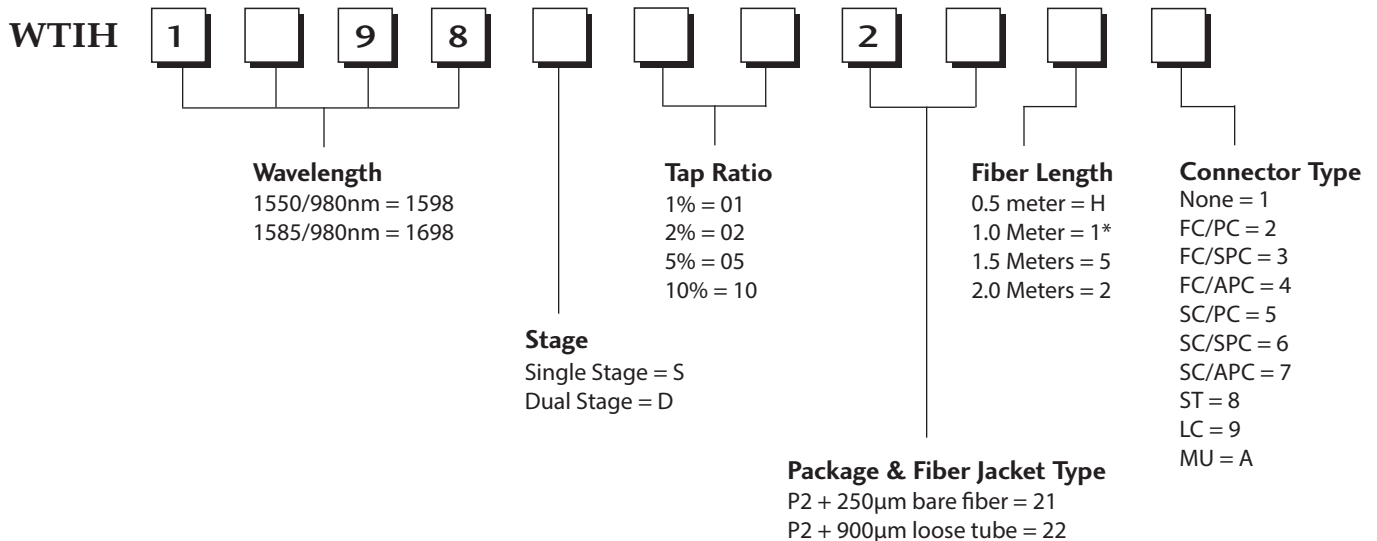

* The tolerance of fiber length is +/-0.1m. 1 meter is standard.
The lead-time for special fiber length will be longer.