1SS270A

DO-35

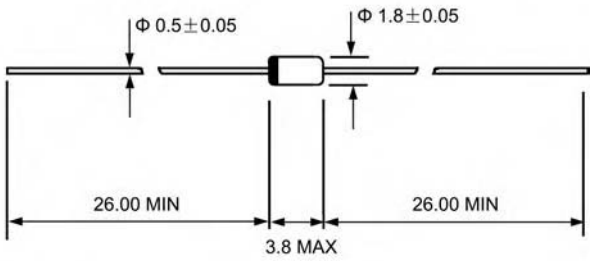

Features

- Low capacitance. (C = 3.0pF max)
- Short reverse recovery time. (t_{rr} = 3.5ns max)
- Small glass package (MHD) enables easy mounting and high reliability.

Ordering Information

Type No.	Cathode band	Package Code
1SS270	Light Blue	MHD

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Value	Unit
Peak reverse voltage	V_{RM}	35	V
Reverse voltage	V_R	30	V
Peak forward current	I_{FM}	450	mA
Non-Repetitive peak forward surge current	I_{FSM}*	1	A
Average forward current	I_O	150	mA
Power dissipation	Pd	250	mW
Junction temperature	Tj	175	°C
Storage temperature	Tstg	–65 to +175	°C

Note: Within 1s forward surge current.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Forward voltage	V_F	—	—	0.8	V	I_F = 10mA
Reverse current	I_R	—	—	1.0	μA	V_R = 30V
Capacitance	C	—	—	3.0	pF	V_R = 1V, f = 1MHz
Reverse recovery time	t_{rr}	—	—	3.5	ns	I_F = 10mA, V_R = 6V, R_L = 50Ω

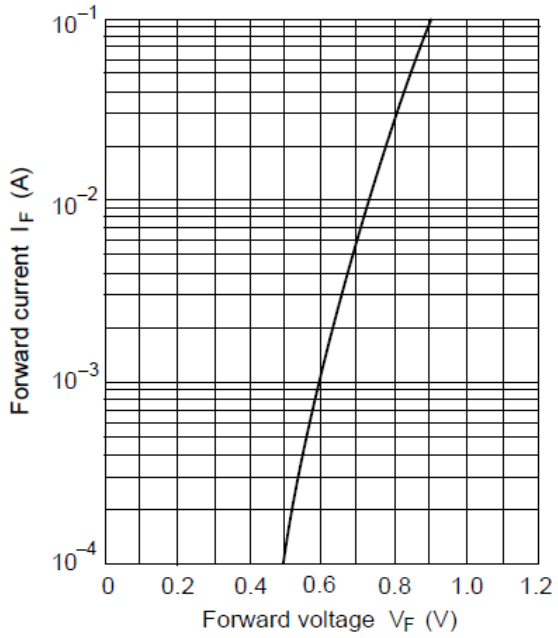

Fig.1 Forward current Vs. Forward voltage

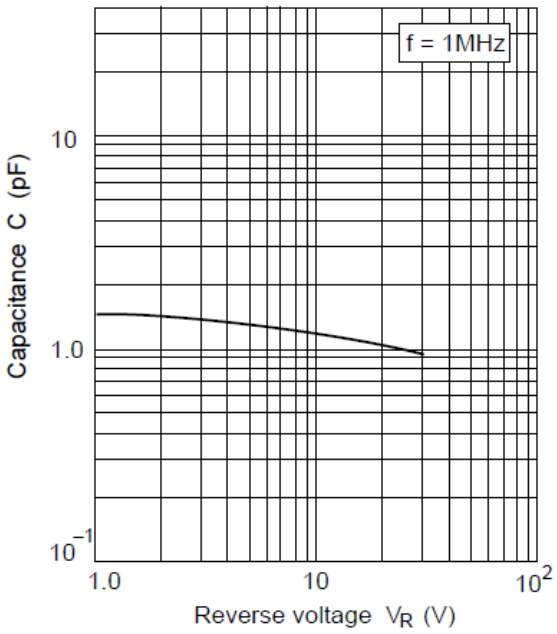

Fig.2 Capacitance Vs. Reverse voltage