National Semiconductor

February 1988

MM54C175/MM74C175 Quad D Flip-Flop

General Description

The MM54C175/MM74C175 consists of four positive-edge triggered D type flip-flops implemented with monolithic CMOS technology. Both are true and complemented outputs from each flip-flop are externally available. All four flip-flops are controlled by a common clock and a common clear. Information at the D inputs meeting the set-up time requirements is transferred to the Q outputs on the positive-going edge of the clock pulse. The clearing operation, enabled by a negative pulse at Clear input, clears all four Q outputs to logical "0" and Q's to logical "1".


All inputs are protected from static discharge by diode clamps to V_{CC} and GND.

Features

■ Wide supply voltage range	3V to 15V
■ Guaranteed noise margin	1.0V
■ High noise immunity	0.45 V_{CC} (typ.)
■ Low power TTL compatibility	Fan out of 2 driving 74L

Connection Diagram & Truth Table

Dual-In-Line Package

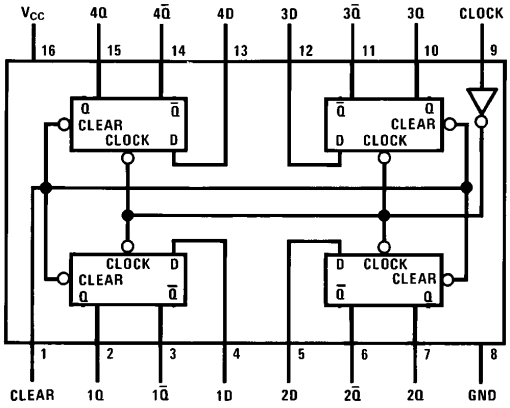

TL/F/5900–1

Top View

Order Number MM54C175 or MM74C175

Each Flip-Flop

Inputs			Outputs	
Clear	**Clock**	**D**	**Q**	**$\overline{Q}$**
L	X	X	L	H
H	↑	H	H	L
H	↑	L	L	H
H	H	X	NC	NC
H	L	X	NC	NC

H = High level
L = Low level
X = Irrelevant
↑ = Transition from low to high level
NC = No change

©1995 National Semiconductor Corporation

RRD-B30M105/Printed in U. S. A.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Voltage at Any Pin	−0.3V to V_{CC} +0.3V
Operating Temperature Range	
MM54C175	−55°C to +125°C
MM74C175	−40°C to +85°C
Storage Temperature Range	−65°C to +150°C
Power Dissipation (P_D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Operating V_{CC} Range	3V to 15V
Absolute Maximum V_{CC}	18V
Lead Temperature (Soldering, 10 seconds)	260°C

DC Electrical Characteristics Min/Max limits apply across temperature range unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
CMOS TO CMOS						
$V_{IN(1)}$	Logical "1" Input Voltage	V_{CC} = 5V V_{CC} = 10V	3.5 8.0			V V
$V_{IN(0)}$	Logical "0" Input Voltage	V_{CC} = 5V V_{CC} = 10V			1.5 2.0	V V
$V_{OUT(1)}$	Logical "1" Output Voltage	V_{CC} = 5V, I_O = −10 μA V_{CC} = 10V, I_O = −10 μA	4.5 9.0			V V
$V_{OUT(0)}$	Logical "0" Output Voltage	V_{CC} = 5V, I_O = 10 μA V_{CC} = 10V, I_O = 10 μA			0.5 1.0	V V
$I_{IN(1)}$	Logical "1" Input Current	V_{CC} = 15V, V_{IN} = 15V		0.005	1.0	μA
$I_{IN(0)}$	Logical "0" Input Current	V_{CC} = 15V, V_{IN} = 0V	−1.0	−0.005		μA
I_{CC}	Supply Current	V_{CC} = 15V		0.05	300	μA
CMOS/LPTTL INTERFACE						
$V_{IN(1)}$	Logical "1" Input Voltage	54C, V_{CC} = 4.5V 74C, V_{CC} = 4.75V	V_{CC} − 1.5 V_{CC} − 1.5			V V
$V_{IN(0)}$	Logical "0" Input Voltage	54C, V_{CC} = 4.5V 74C, V_{CC} = 4.75V			0.8 0.8	V V
$V_{OUT(1)}$	Logical "1" Output Voltage	54C, V_{CC} = 4.5V, I_O = −360 μA 74C, V_{CC} = 4.75V, I_O = −360 μA	2.4 2.4			V V
$V_{OUT(0)}$	Logical "0" Output Voltage	54C, V_{CC} = 4.5V, I_O = 360 μA 74C, V_{CC} = 4.75V, I_O = 360 μA			0.4 0.4	V V
OUTPUT DRIVE (See 54C/74C Family Characteristics Data Sheet) (Short Circuit Current)						
I_{SOURCE}	Output Source Current (P-Channel)	V_{CC} = 5V, T_A = 25°C, V_{OUT} = 0V	−1.75	−3.3		mA
I_{SOURCE}	Output Source Current (P-Channel)	V_{CC} = 10V, T_A = 25°C, V_{OUT} = 0V	−8.0	−15		mA
I_{SINK}	Output Sink Current (N-Channel)	V_{CC} = 5V, T_A = 25°C, V_{OUT} = V_{CC}	1.75	3.6		mA
I_{SINK}	Output Sink Current (N-Channel)	V_{CC} = 10V, T_A = 25°C, V_{OUT} = V_{CC}	8.0	16		mA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

AC Electrical Characteristics* $T_A = 25°C$, $C_L = 50$ pF, unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{pd}	Propagation Delay Time to a Logical "0" or Logical "1" from Clock to Q or $\overline{Q}$	$V_{CC} = 5V$ $V_{CC} = 10V$		190 75	300 110	ns ns
t_{pd}	Propagation Delay Time to a Logical "0" from Clear to Q	$V_{CC} = 5V$ $V_{CC} = 10V$		180 70	300 110	ns ns
t_{pd}	Propagation Delay Time to a Logical "1" from Clear to Q	$V_{CC} = 5V$ $V_{CC} = 10V$		230 90	400 150	ns ns
t_S	Time Prior to Clock Pulse that Data Must be Present	$V_{CC} = 5V$ $V_{CC} = 10V$	100 40	45 16		ns ns
t_H	Time After Clock Pulse that Data Must be Held	$V_{CC} = 5V$ $V_{CC} = 10V$	0 0	−11 −4		ns ns
t_W	Minimum Clock Pulse Width	$V_{CC} = 5.0V$ $V_{CC} = 10V$		130 45	250 100	ns ns
t_W	Minimum Clear Pulse Width	$V_{CC} = 5.0V$ $V_{CC} = 10V$		120 45	250 100	ns ns
t_r	Maximum Clock Rise Time	$V_{CC} = 5V$ $V_{CC} = 10V$	15 5.0	450 125		μs μs
t_f	Maximum Clock Fall Time	$V_{CC} = 5V$ $V_{CC} = 10V$	15 5.0	50 50		μs μs
f_{MAX}	Maximum Clock Frequency	$V_{CC} = 5V$ $V_{CC} = 10V$	2.0 5.0	3.5 10		MHz MHz
C_{IN}	Input Capacitance	Clear Input (Note 2) Any Other Input		10 5.0		pF pF
C_{PD}	Power Dissipation Capacitance	Per Package (Note 3)		130		pF

*AC Parameters are guaranteed by DC correlated testing.


Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 2: Capacitance is guaranteed by periodic testing.

Note 3: C_{PD} determines the no load AC power consumption of any CMOS device. For complete explanation see 54C/74C Family Characteristics Application Note AN-90.

Switching Time Waveforms


CMOS to CMOS

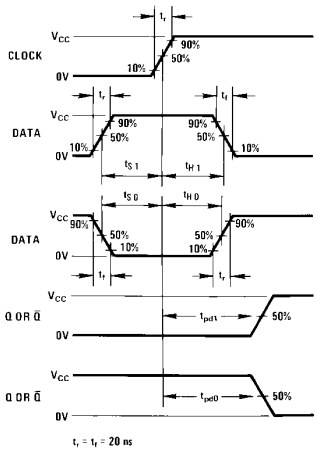


TL/F/5900–6

Logic Diagram


Typical One of Four

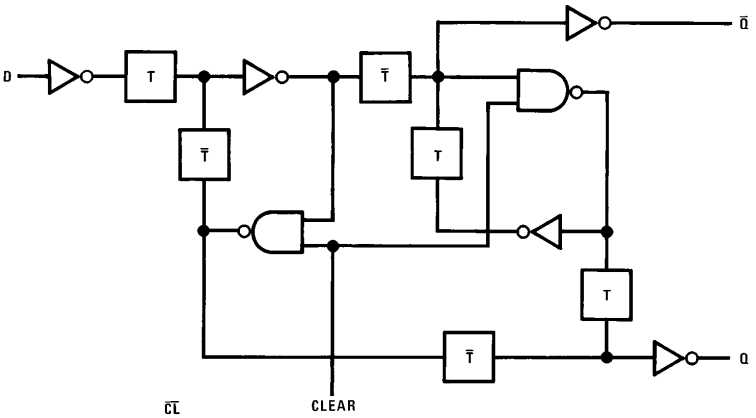


TL/F/5900–2



TL/F/5900–3




TL/F/5900–4




TL/F/5900–5

Physical Dimensions inches (millimeters)

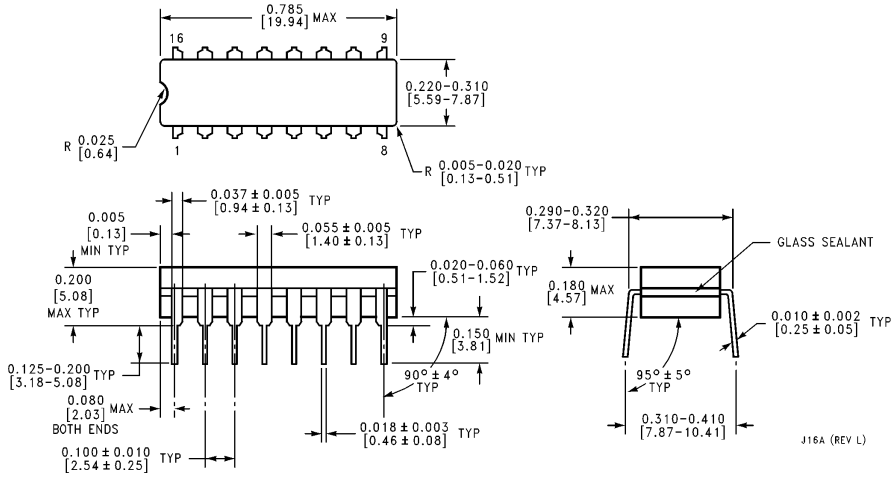

Ceramic Dual-In-Line Package (J)
Order Number MM54C175J or MM74C175J
NS Package Number J16A

Physical Dimensions inches (millimeters) (Continued)

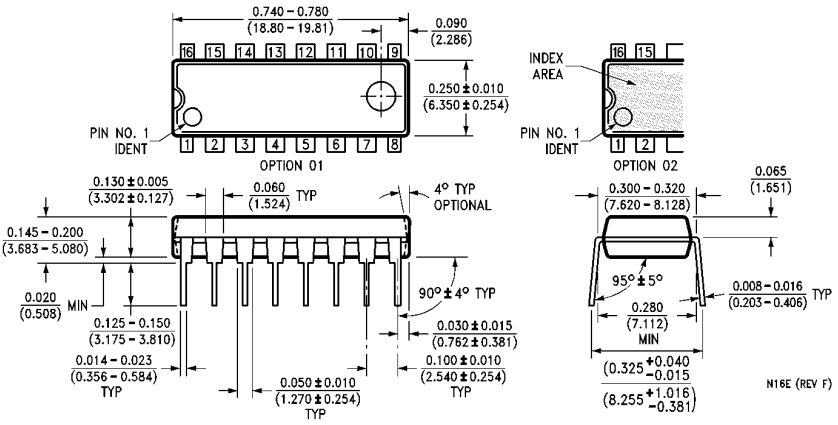

Molded Dual-In-Line Package (N)
Order Number MM54C175N or MM74C175N
NS Package Number N16E

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.