


MOTOR CONTROL CIRCUIT

DESCRIPTION

The UTC AN6652 is an IC designed for the rotating speed control of a compact DC motor, which is used for a tape recorder, record player, etc.


FEATURES

- *Small four-lead plastic package for compact motor. Fewer external parts.
- *Stable low reference voltage (1.25V typ.), wide motor speed setting
- *Highly stable operation over a wide range of supply voltage and torque supply voltage, $V_{CC}=6V\sim 20V$
- *Reverse voltage protection circuit is built-in.

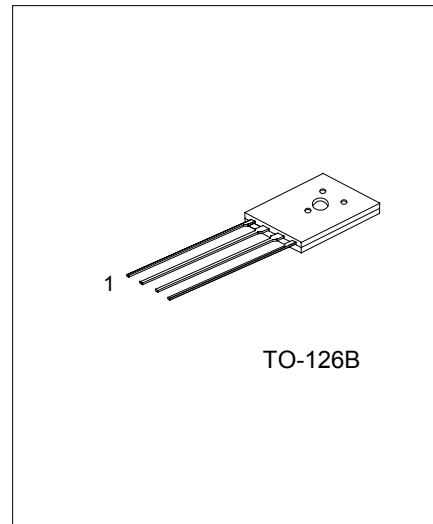

1: Vcc 2: Control 3: GND 4: Motor

BLOCK DIAGRAM

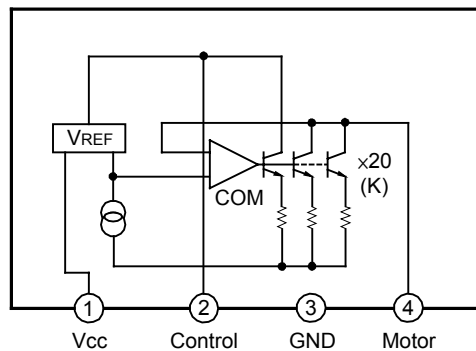ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	22	V
Supply Current	I_{CC}^{*2}	1.5	A
Power Dissipation	P_D^{*1}	1.3	W
Operating Temperature	T_{opr}	$-20\sim+75$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-40\sim+150$	$^\circ\text{C}$


*1. $T_a = 25^\circ\text{C}$, With a $10 \times 10\text{mm}$ bakelite printed circuit board ($35\mu\text{m}$ Cu leaf)

*2. $t \leq 5\text{s}$

ELECTRICAL CHARACTERISTICS (Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	$V_{CC}=12V, R_a=1k\Omega$	1.15	1.25	1.40	V
Bias Current	I_{Bias}	$V_{CC}=12V$		0.1	1	mA
Current Proportional Constant	K	$V_{CC}=12V, I_{L4}=20mA$	18	20	22	
Saturation Voltage	V_{sat}	$V_{CC}=8.0V, R_a=18\Omega$		1	2	V
Voltage Characteristics (1)	$\frac{\Delta V_{REF}}{V_{REF}} / V_{CC}$	$V_{CC}=9V\sim 16V, R_a=1k\Omega$	-0.6	-0.02	0.6	%/V
Voltage Characteristics (2)	$\frac{\Delta K}{K} / V_{CC}$	$V_{CC}=9V\sim 16V, I_{L4}=20mA$	-0.7	0.2	0.7	%/V
Current Characteristics (1)	$\frac{\Delta V_{REF}}{V_{REF}} / I_{L4}$	$I_{L4}=10\text{ mA} \sim 50mA$	-0.1	-0.03	0.1	%/mA
Current Characteristics (2)	$\frac{\Delta K}{K} / I_{L4}$	$I_{L4}=50mA\sim 100mA$	-0.15	-0.01	0.15	%/mA
Temperature Characteristics (1)	$\frac{\Delta V_{REF}}{V_{REF}} / T_a$	$T_a=-20^\circ C \sim +75^\circ C$, $V_{CC}=12V, R_a=1k\Omega$		0.01		%/°C
Temperature Characteristics (2)	$\frac{\Delta K}{K} / T_a$	$T_a=-20^\circ C \sim +75^\circ C$, $I_{L4}=20mA$		0.01		%/°C

APPLICATION CIRCUIT

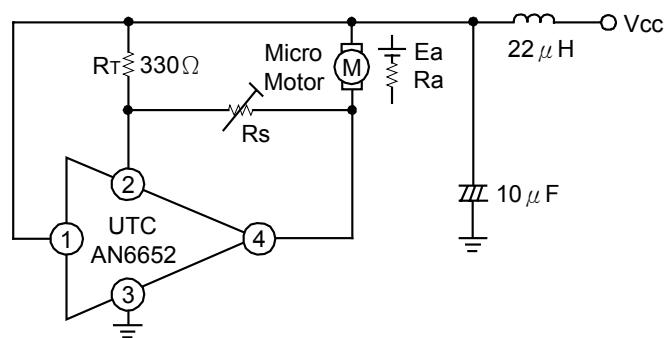

Motor Constants { K_a : Generation constant=2.4mV/rpm
 R_a : Internal resistor = 18Ω
 K_T : Torque constant=200g·cm/A

CHARACTERISTICS CURVE

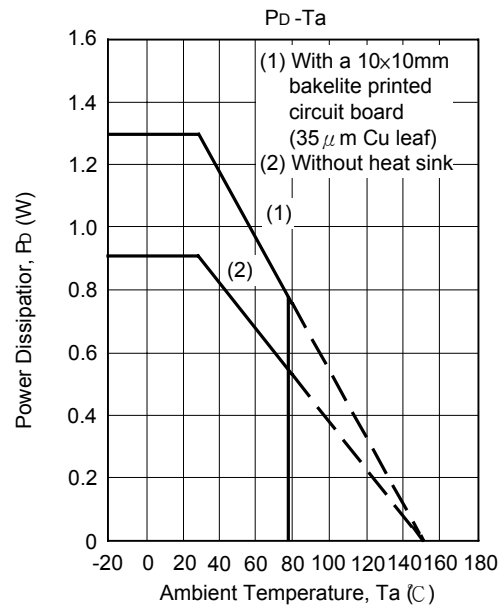

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.