


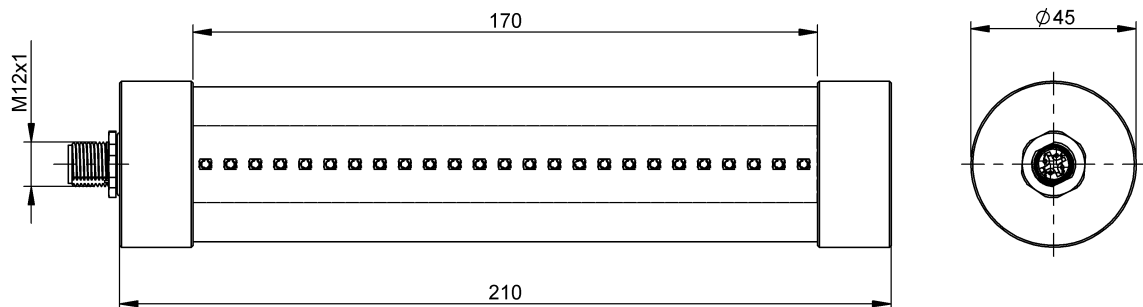

Basic features

Approval/Conformity	CE EAC UL Listed WEEE
Scope of delivery	Machine light Ø45 mm
Version	Machine light

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes

Electrical data

Current draw max.	250 mA
Protection class	III
Rated operating voltage Ue DC	24 V

Environmental conditions

Ambient temperature	-20...40 °C
IP rating	IP67

Material

Material	Aluminum Anodized Borosilicate crown glass
----------	---

Mechanical data

Dimension	Ø 45 x 210 mm
-----------	---------------


Optical features

Beam angle	120 °
Color temperature	5000 K
Illumination area	170 x 42 mm
LED group per IEC 62471	Risk group 1
Light intensity	900 lm
Light type	LED white light diffuse

Remarks

For additional information, refer to user's guide.
Order accessories separately.
Install the device so that no direct view of the light source is possible even during operation.

Connector Drawings




PIN 1: +24V

PIN 2: n.c.

PIN 3: 0 V, DC

PIN 4: n.c.

Warning Symbols



LED light– DO NOT LOOK INTO THE BEAM!

Risk Group 1 per IEC 62471:2006-07