

# SHINDENGEN

## Schottky Rectifiers (SBD)

Dual

# S20SC4M

## 40V 20A


### FEATURES

- Tj150
- P<sub>RRSM</sub> avalanche guaranteed
- Small j<sub>c</sub>
- High current capacity

### APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

### OUTLINE DIMENSIONS

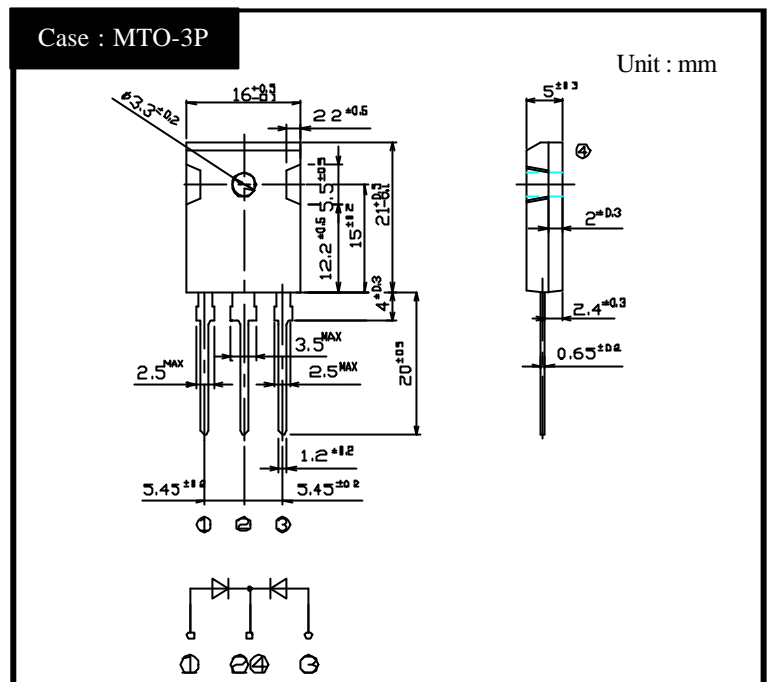

### RATINGS

Absolute Maximum Ratings (If not specified T<sub>c</sub>=25 )


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-40 ~ 150	
Operating Junction Temperature	T <sub>j</sub>		150	
Maximum Reverse Voltage	V <sub>RM</sub>		40	V
Repetitive Peak Surge Reverse Voltage	V <sub>RRSM</sub>	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I <sub>O</sub>	50Hz sine wave, R-load, Rating for each diode I <sub>O</sub> /2, T <sub>c</sub> =125	20	A
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1 cycle peak value, T <sub>j</sub> =125	170	A
Repetitive Peak Surge Reverse Power	P <sub>RRSM</sub>	Pulse width 10 μs, Rating of per diode, T <sub>j</sub> =25	660	W
Mounting Torque	TOR	(Recommended torque 0.5N·m)	0.8	N·m

Electrical Characteristics (If not specified T<sub>c</sub>=25 )


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F2</sub>	I <sub>F</sub> =10A, Pulse measurement, Rating of per diode	Max.0.59	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max.5	mA
Junction Capacitance	C <sub>j</sub>	f=1MHz, V <sub>R</sub> =10V, Rating of per diode	Typ.340	pF
Thermal Resistance	j <sub>c</sub>	junction to case	Max.1.2	/W

# S20SC4M


## Forward Voltage

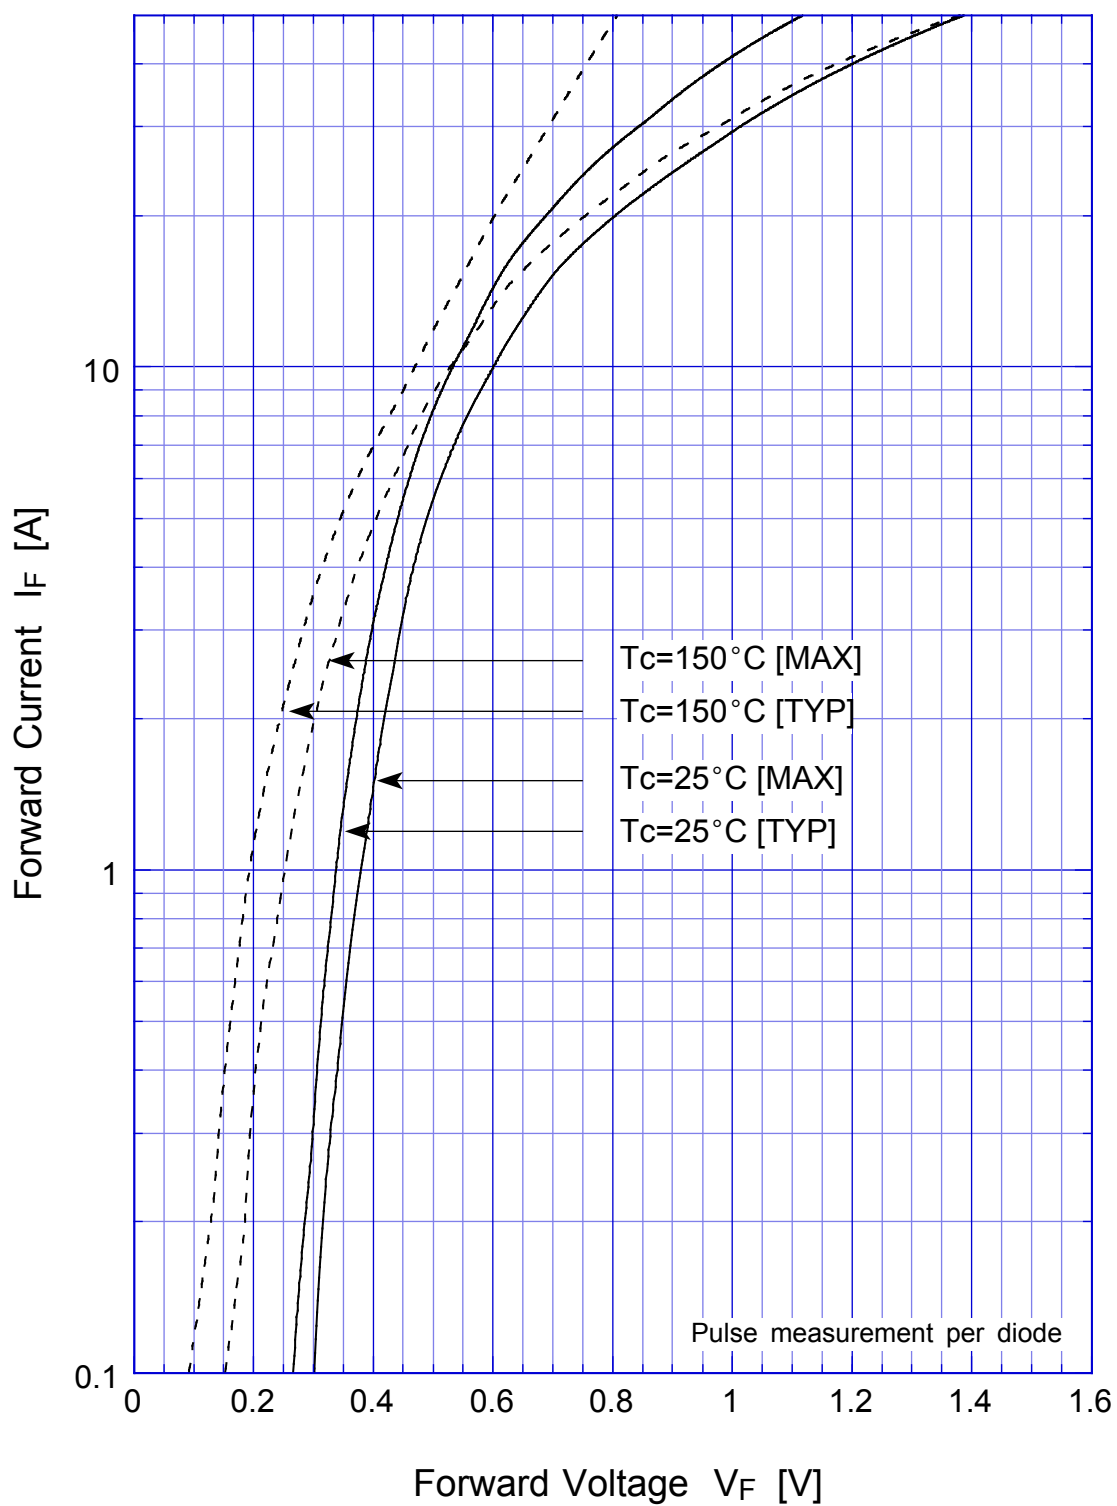


# S20SC4M Junction Capacitance

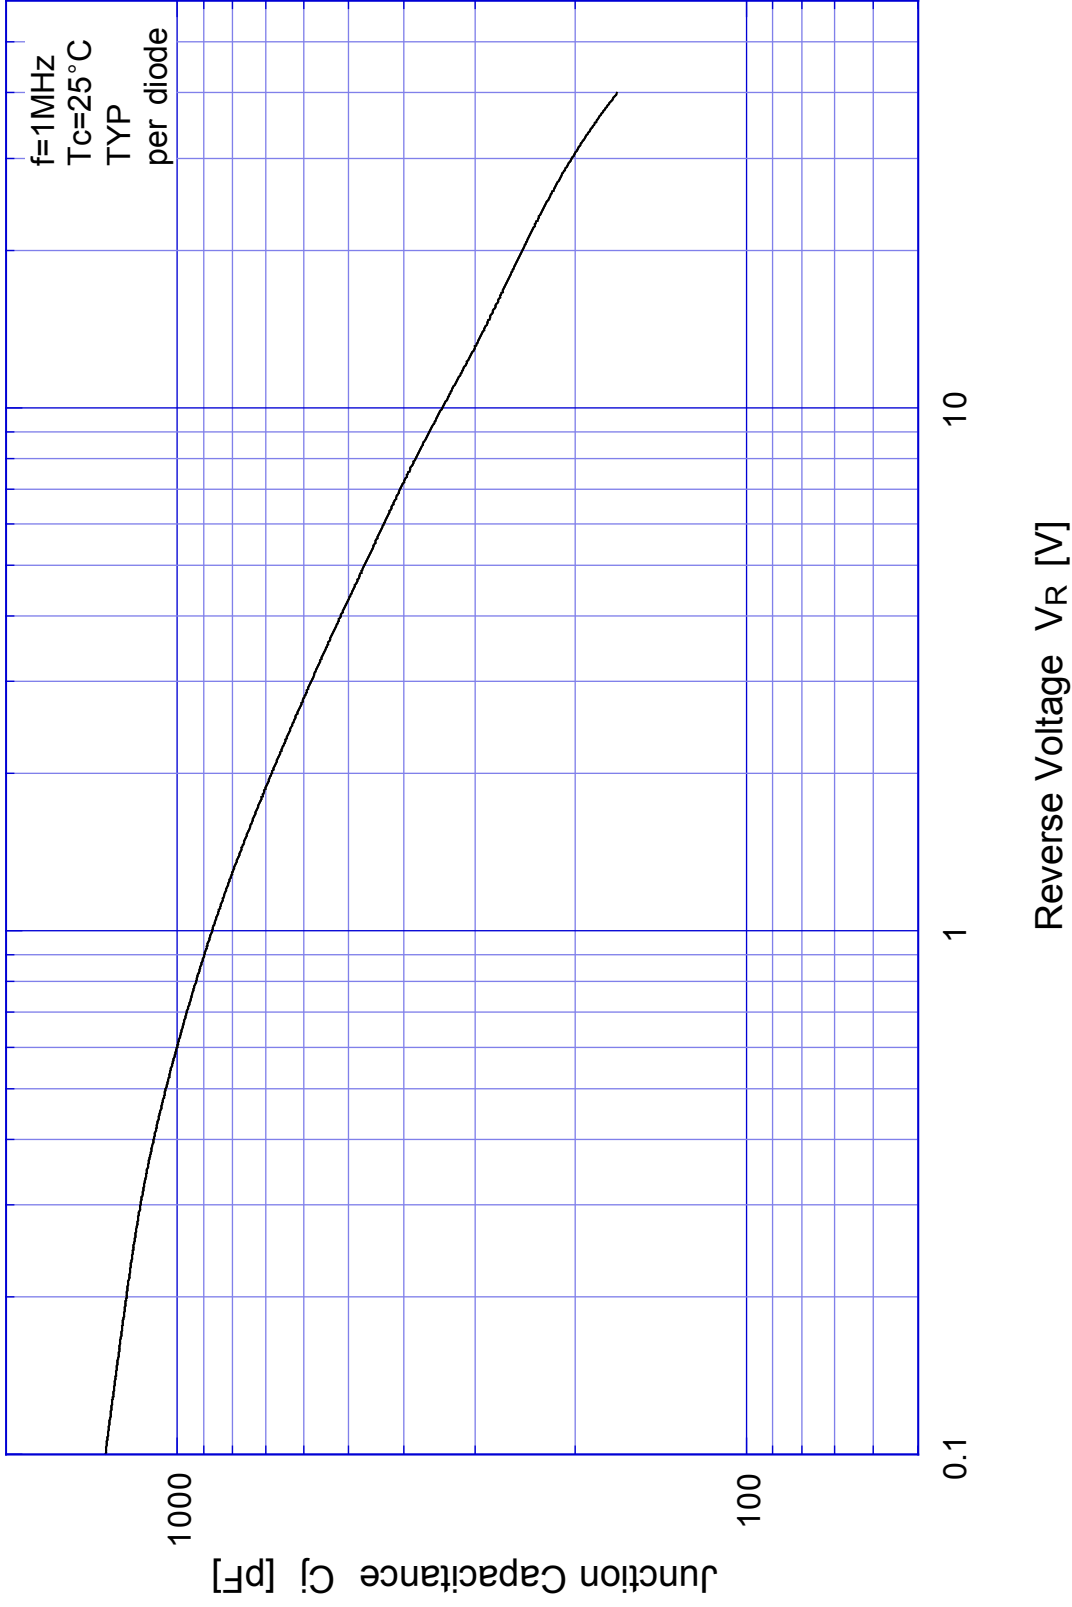


# S20SC4M Reverse Current

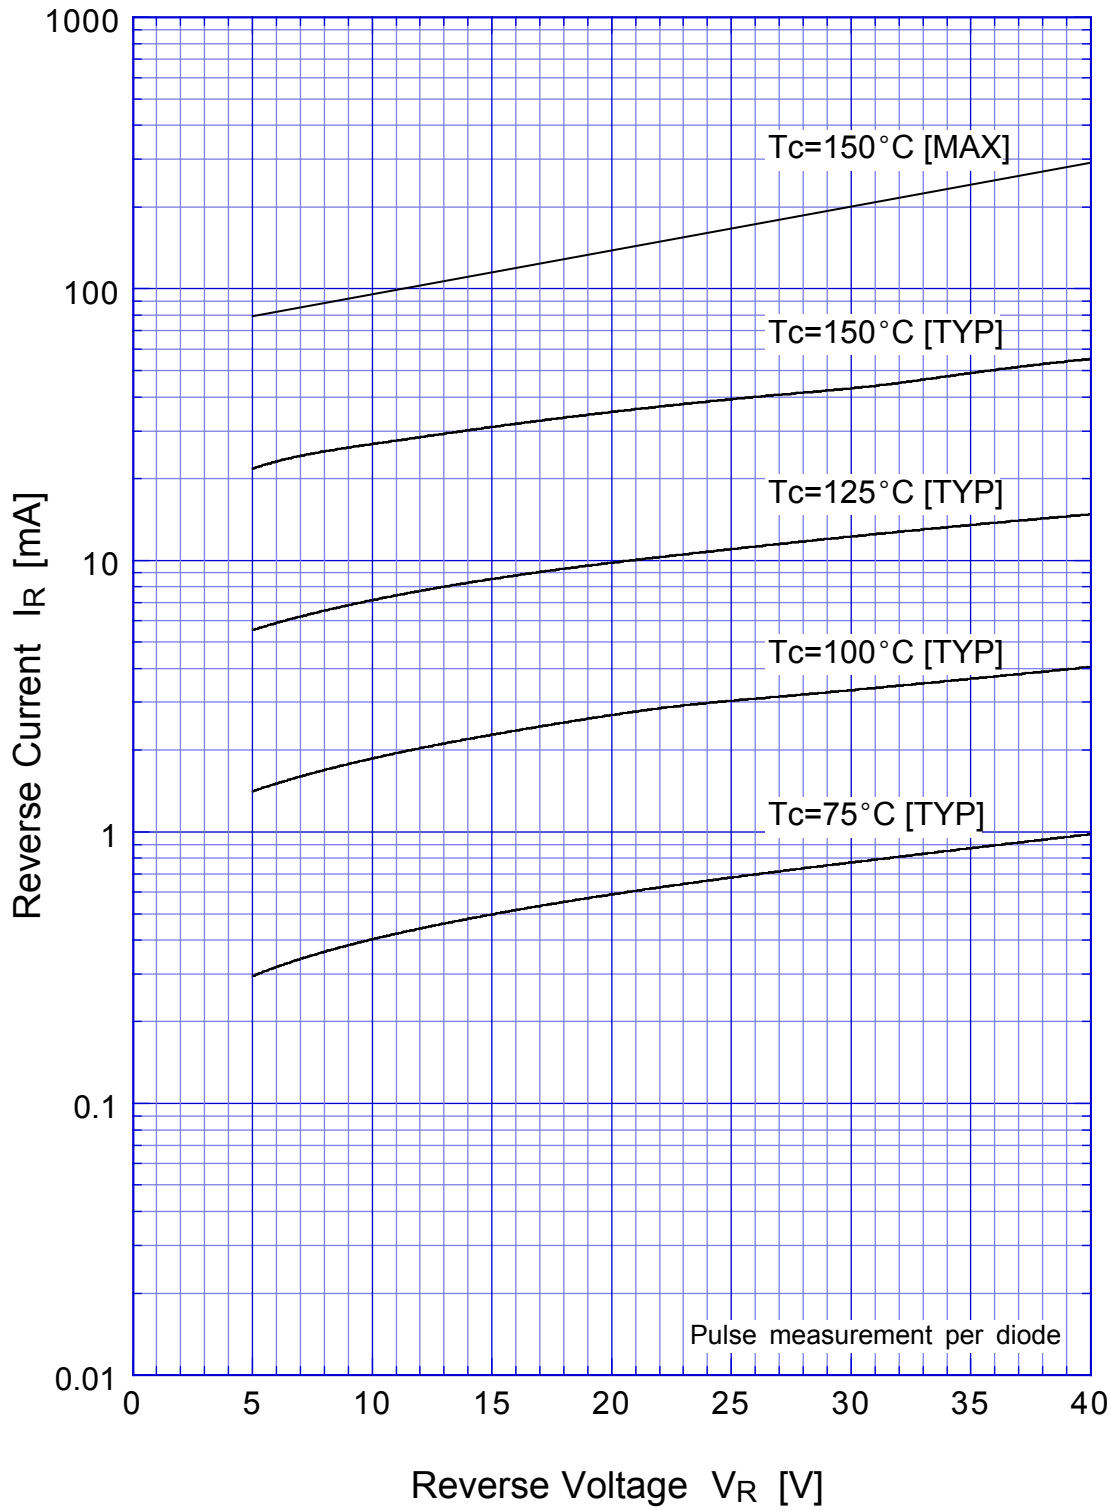


## S20SC4M Reverse Power Dissipation

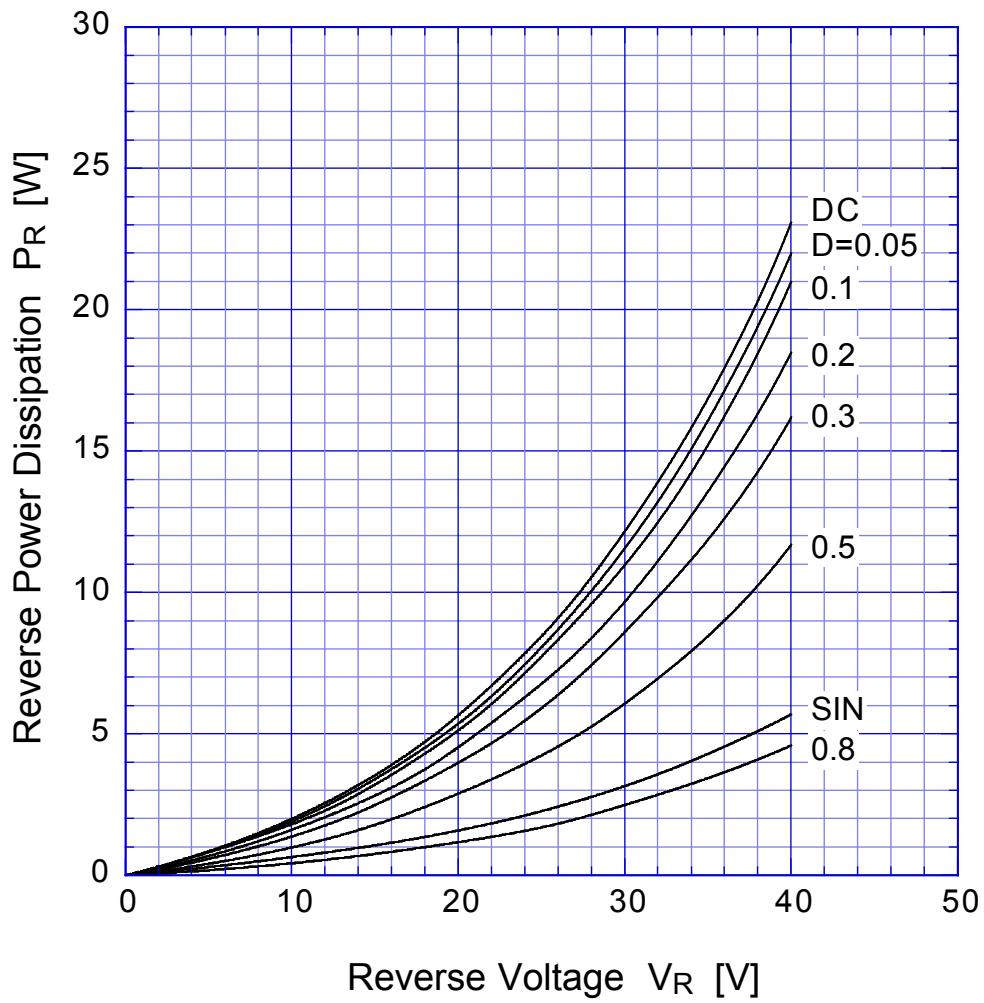


$T_j = 150^\circ\text{C}$

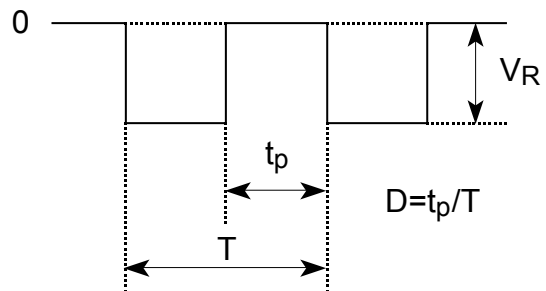

## S20SC4M Forward Power Dissipation

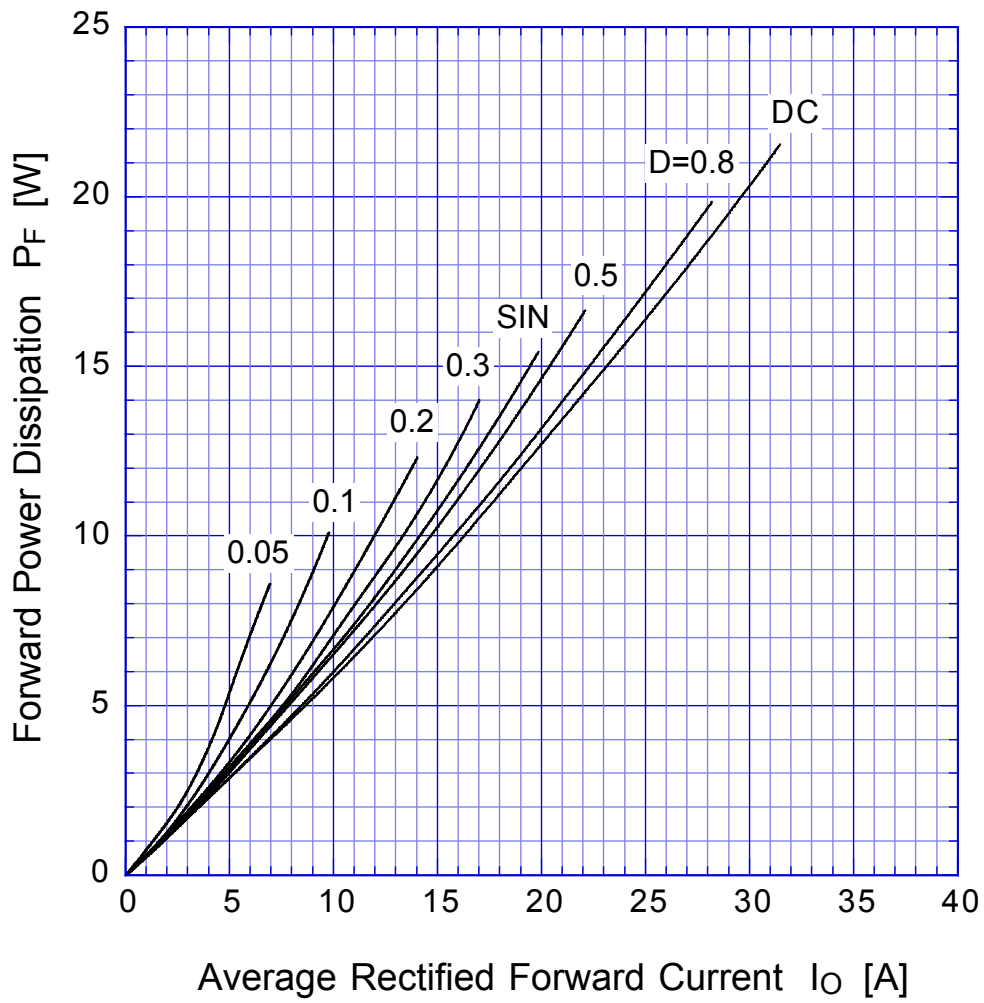


$T_j = 150^\circ\text{C}$

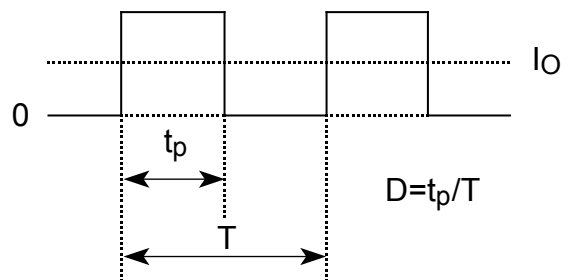

# S20SC4M


# Derating Curve

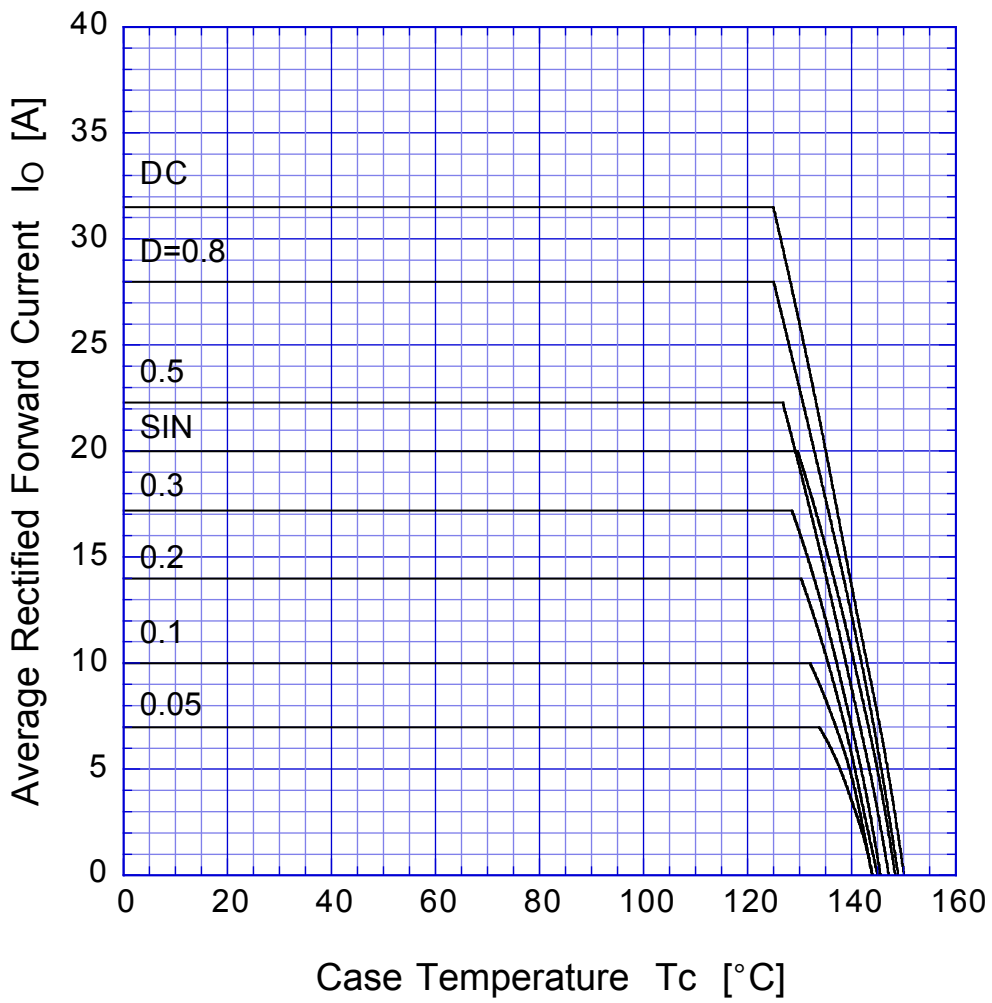

$V_R = 20V$





# S20SC4M Peak Surge Forward Capability

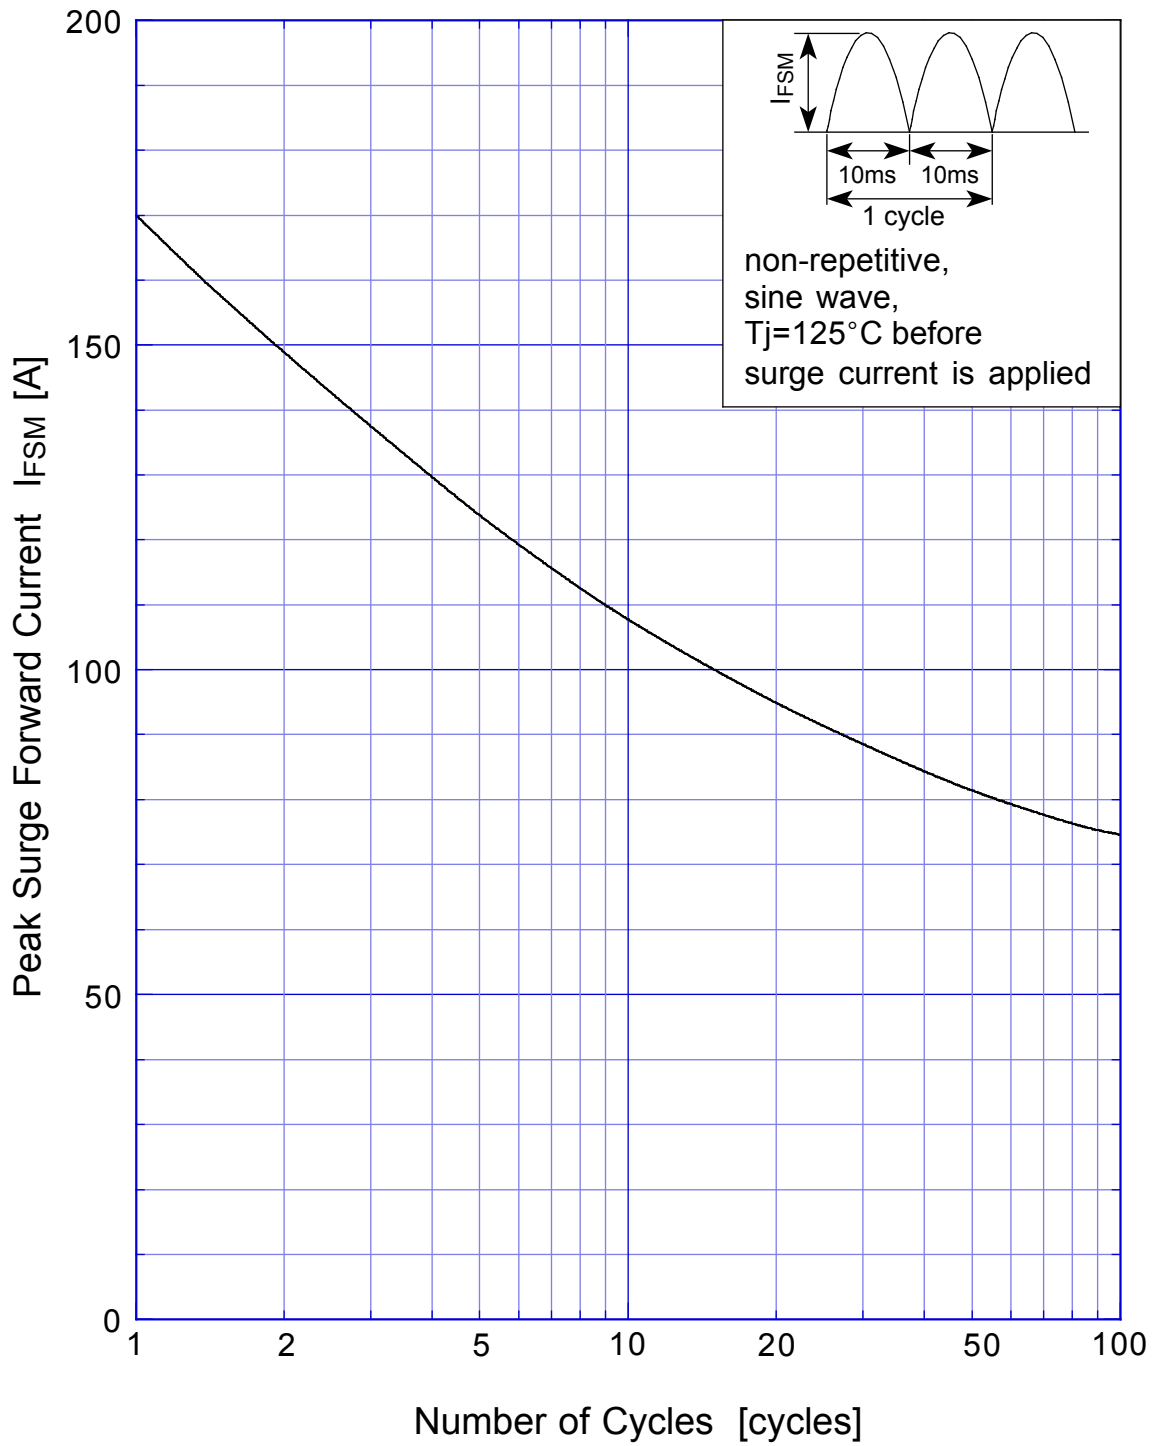



# SBD Repetitive Surge Reverse Power Derating Curve

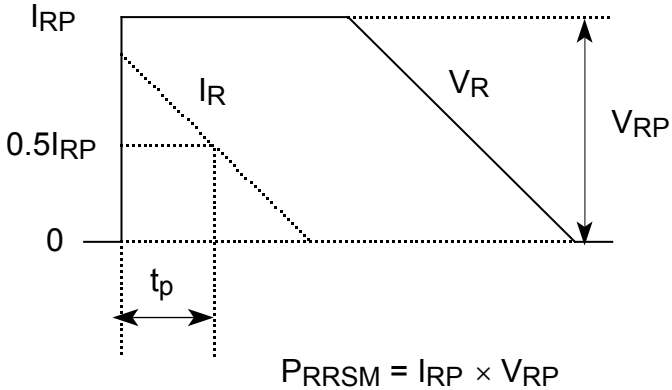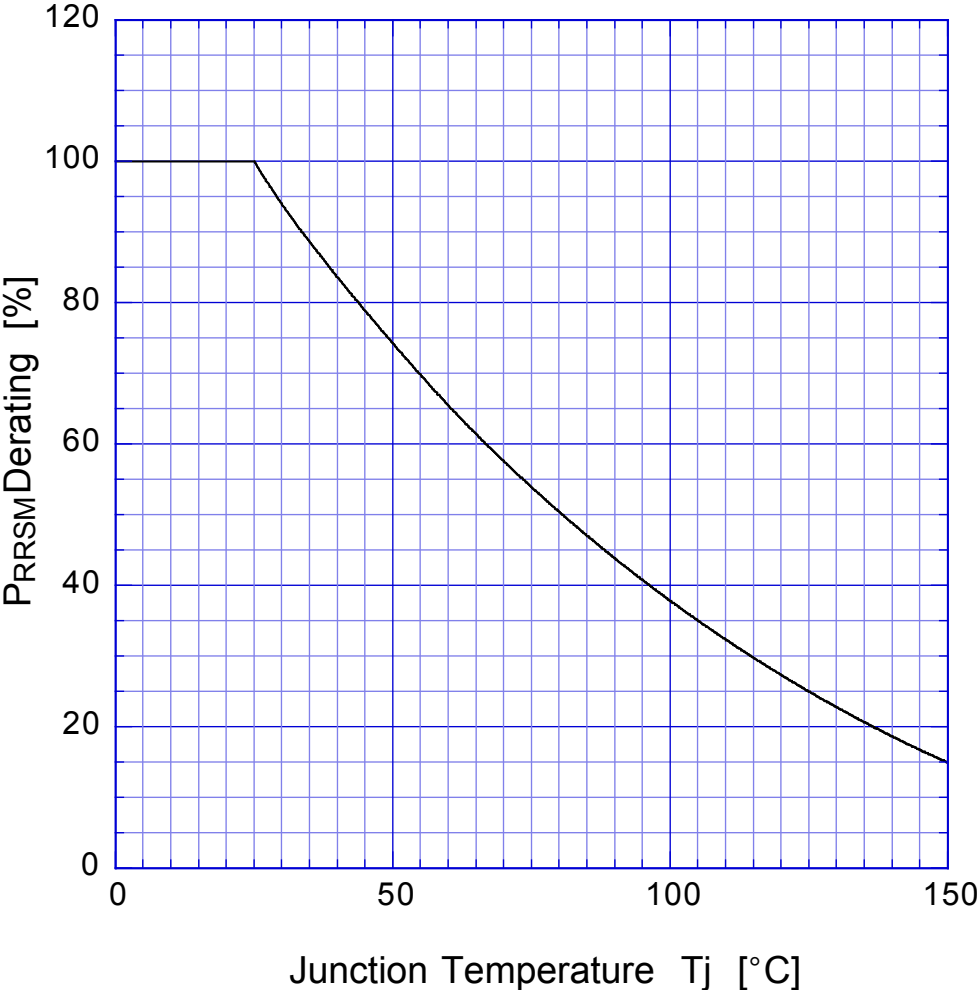

# SBD

## Repetitive Surge Reverse Power Capability

