

Specify AEL VCXO



FEATURES

- Wide Frequency Range
- Fast Turnaround Options
- 3.0V and 5.0V Devices
- Wide Pull Ranges

APPLICATIONS

- IT Applications
- Datacommunications
- Telecommunications
- Automotive Electronics

GENERAL SPECIFICATION

Parameter	3.3V Type	5.0V Type	Comments
Input Voltage (Vdd)	+3.3V	+5.0V	+5%
Frequency Range	500KHz to 125MHz		Package Dependant
	+- 10ppm (Option Code A)		
Frequency Stability	+- 25ppm (Option Code B)		
	+- 50ppm (Option Code C)		
	+- 100ppm (Option Code D)		
Vs Aging	+5ppm per year max		
Operating Temp	0 to +70 Deg C (Option Code E)		
	-40 to +85 Deg C (Option Code F)		
Storage Temp	-40 to +85 Deg C		
Linearity	10% max		6% Typical
Control Voltage	+1.65V +-1.35V	+2.5V +2.0V	
Pull Range	+-30ppm to +-150ppm	+-80ppm to +-200ppm	
Slope Polarity	Positive or Negative	Positive or Negative	Positive Std
Current Consumption	5 ~ 45mA max.		Frequency Dependant
Start-up Time	10mS max		5mS Typical
Modulation Bandwidth	10KHz min		
Input Impedance	50K Ohms @ 10KHz min		
	TTL Square Wave		
Output Voltage Level			
High '1'	2.4V min		
Low '0'	0.4V max		
Rise & Fall Time	10nS max (measured between 0.4V and 2.4V)		3nS Typical
Duty Cycle	40% min , 60% max (measured at 1.4V)		
Output Load	5 ~ 10 TTL gates		
	CMOS Square Wave		
Output Voltage Level			
High '1'	2.97V min	Vcc -0.5V min	
Low '0'	0.33V max	0.5V max	



www.aelcrystals.co.uk

quartz based frequency control components

Order Hotline +44 1293 524245


www.aelcrystals.co.uk
sales@aelcrystals.co.uk

Specify AEL VCXO




Quartz Crystal Oscillators


Packages Available

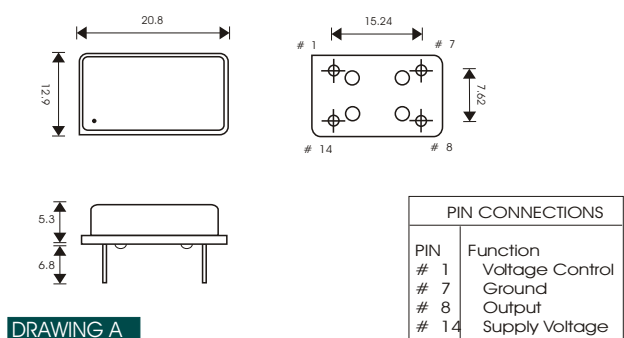


DRAWING A

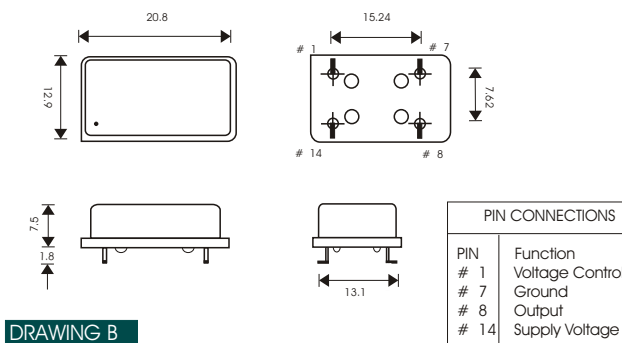


DRAWING B

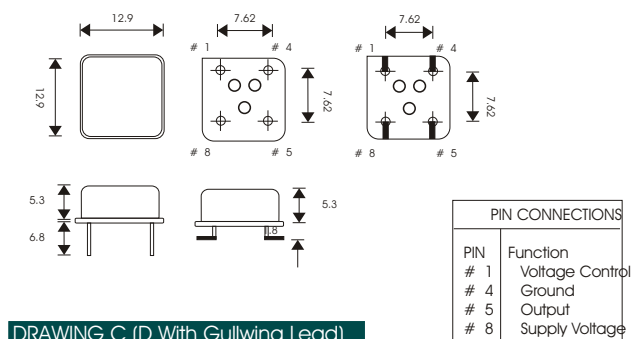


DRAWING C (D With Gullwing Lead)

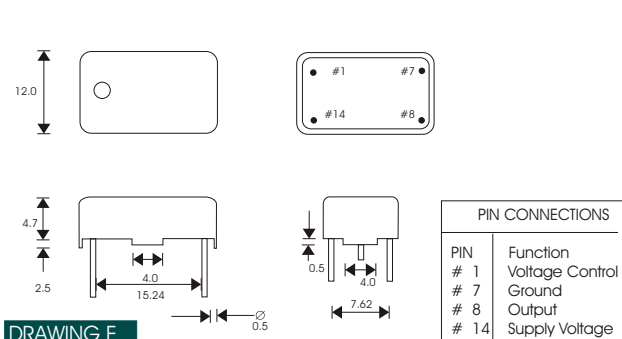


DRAWING E

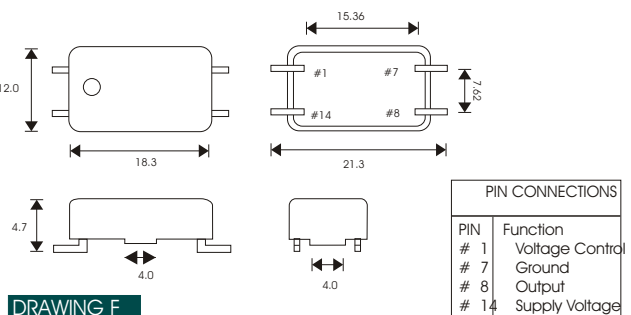


DRAWING F

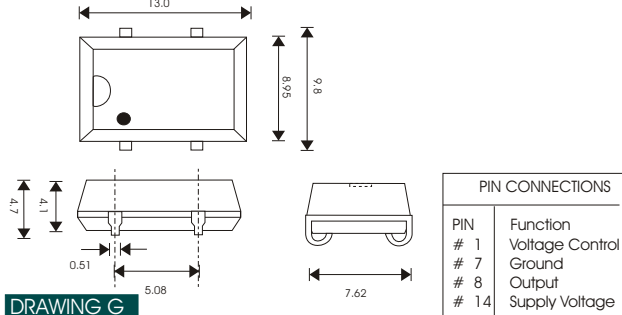

DRAWING G

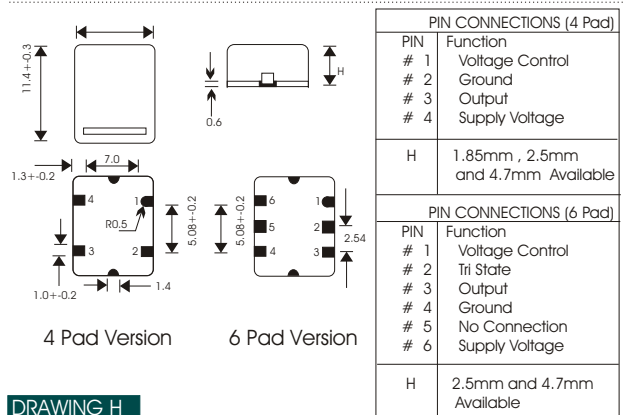

DRAWING H

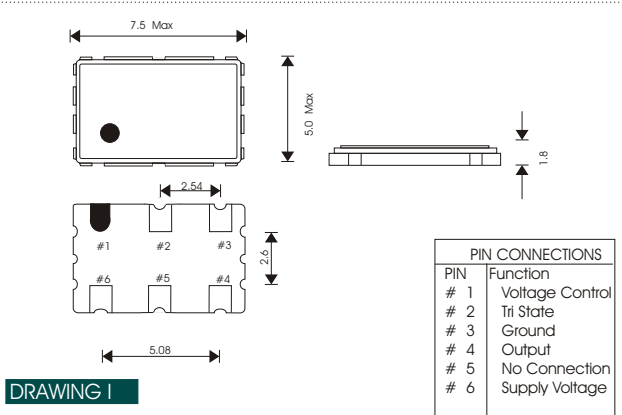

DRAWING I



www.aelcrystals.co.uk

quartz based frequency control components

Order Hotline +44 1293 524245

www.aelcrystals.co.uk
sales@aelcrystals.co.uk


Specify AEL VCXO



PACKAGE CODES

Package Code	Drawing	Description
A1	A	14 Pin DIL Hermetically Sealed
B1	B	14 Pin SMD Gullwing - DIL Hermetically Sealed
C1	C	8-Pin DIL Hermetically Sealed
D1	D	8-Pin DIL Gullwing Hermetically Sealed
E1	E	14-Pin DIL Low Cost 4.7mm High
F1	F	14-Pin DIL Gullwing Low Cost 4.7mm High
G1	G	Plastic Moulded SMD
H1	H	9mm x 11mm SMD - 2.5mm High - 6 Pad
H2	H	9mm x 11mm SMD - 4.7mm High - 6 Pad
H3	H	9mm x 11mm SMD - 1.85mm High - 4 Pad
H4	H	9mm x 11mm SMD - 2.5mm High - 4 Pad
H5	H	9mm x 11mm SMD - 4.7mm High - 4 Pad
I1	I	7.5mm x 5mm SMD -1.8mm High - 6 Pad

ORDERING CODE

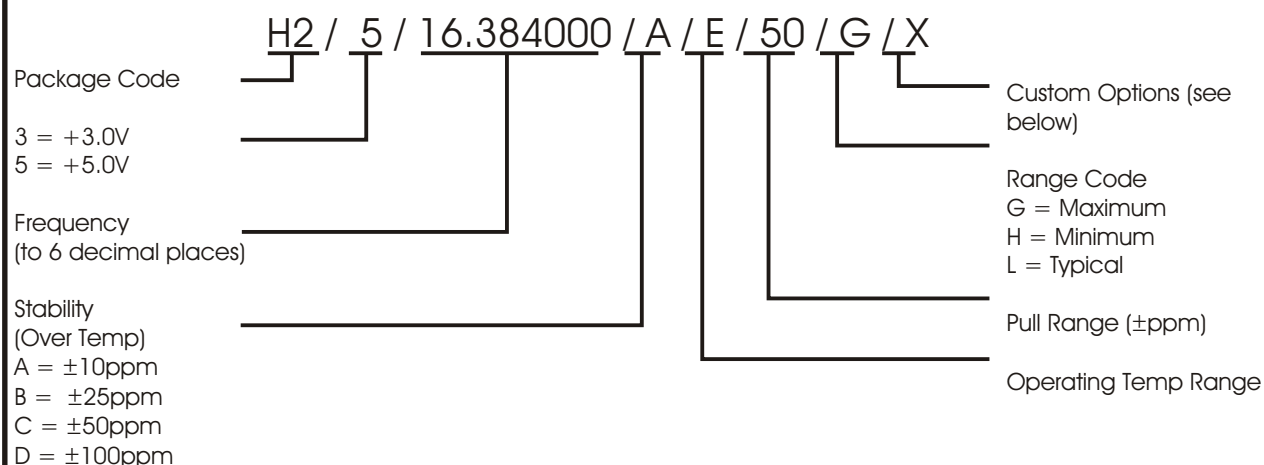

CUSTOM OPTIONS AVAILABLE

- | | |
|---|---|
| A - Tape and reeled | E - Negative Slope Polarity (Inc Vc = dec Fo) |
| B - Customer Specified Adjustment Tolerance | F - Customer Specified Power Consumption |
| C - Tri State option | G - Specified Phase noise requirements |
| D - Customer Specified Stability / Temp Combination | H - Custom Marking |



www.aelcrystals.co.uk

quartz based frequency control components

Order Hotline +44 1293 524245

www.aelcrystals.co.uk
sales@aelcrystals.co.uk