
KMR Series

- Downsized 5mm in height from current snap-ins KMQ series
- Max. 50% up ripple current than same case size of KMQ series
- Endurance with ripple current : 2,000 hours at 105℃
- Rated voltage range : 160 to 450Vdc, Capacitance range : 100 to 3,300μF
- For inverter control, switching power supplies
- Non solvent resistant type
- **RoHS Compliant**






◆SPECIFICATIONS

Items	Characteristics				
Category Temperature Range	−25 to +105℃				
Rated Voltage Range	160 to 450Vdc				
Capacitance Tolerance	±20% (M)				(at 20℃, 120Hz)
Leakage Current	I≦3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)				(at 20℃ after 5 minutes)
Dissipation Factor (tanδ)	Rated voltage (Vdc)	160 to 250V	315 to 400V	420 & 450V	
	tanδ (Max.)	0.15	0.15	0.20	(at 20℃, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (Vdc)	160 to 250V	315 to 400V	420 & 450V	
	Z(−25℃)/Z(+20℃)	4	8	8	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 2,000 hours at 105℃.				
	Capacitance change	≦±20% of the initial value			
	D.F. (tanδ)	≦200% of the initial specified value			
	Leakage current	≦The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.				
	Capacitance change	≦±15% of the initial value			
	D.F. (tanδ)	≦150% of the initial specified value			
	Leakage current	≦The initial specified value			


◆DIMENSIONS [mm]

●Terminal Code : VS (φ22 to φ35) : Standard

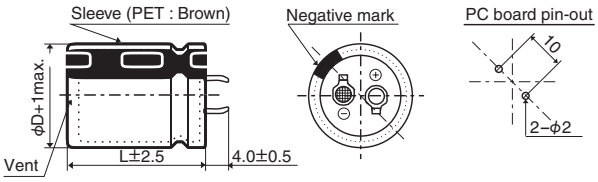


The standard design has no plastic disc.

●Terminal Code : LI (φ35)

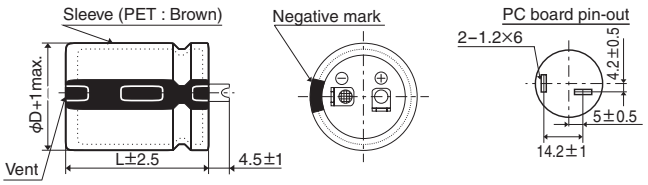

◆PART NUMBERING SYSTEM

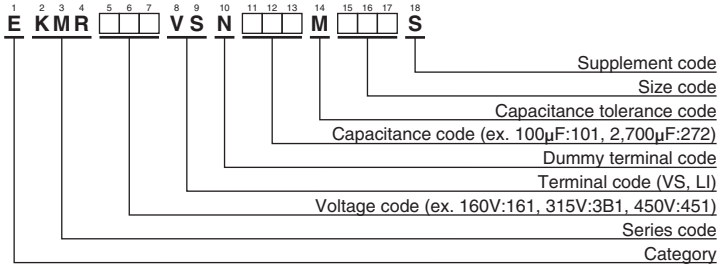

Please refer to "Product code guide (snap-in type)"

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

KMR Series

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105℃,120Hz)	Part No.
160	560	22×25	1.58	EKMR161VSN561MP25S
	680	22×30	1.83	EKMR161VSN681MP30S
	820	22×35	2.06	EKMR161VSN821MP35S
	820	25.4×25	1.89	EKMR161VSN821MQ25S
	1,000	22×40	2.33	EKMR161VSN102MP40S
	1,000	25.4×30	2.15	EKMR161VSN102MQ30S
	1,000	30×25	1.90	EKMR161VSN102MR25S
	1,200	22×45	2.61	EKMR161VSN122MP45S
	1,200	22×50	2.69	EKMR161VSN122MP50S
	1,200	25.4×35	2.45	EKMR161VSN122MQ35S
	1,500	25.4×40	2.82	EKMR161VSN152MQ40S
	1,500	25.4×45	2.88	EKMR161VSN152MQ45S
	1,500	30×30	2.39	EKMR161VSN152MR30S
	1,500	35×25	2.17	EKMR161VSN152MA25S
	1,800	25.4×50	3.22	EKMR161VSN182MQ50S
	1,800	30×35	2.73	EKMR161VSN182MR35S
	1,800	30×40	2.82	EKMR161VSN182MR40S
	1,800	35×30	2.47	EKMR161VSN182MA30S
	2,200	30×45	3.23	EKMR161VSN222MR45S
	2,200	35×35	2.79	EKMR161VSN222MA35S
	2,700	30×50	3.66	EKMR161VSN272MR50S
	2,700	35×40	3.23	EKMR161VSN272MA40S
	3,300	35×45	3.68	EKMR161VSN332MA45S
180	470	22×25	1.45	EKMR181VSN471MP25S
	560	22×30	1.66	EKMR181VSN561MP30S
	680	22×35	1.87	EKMR181VSN681MP35S
	680	25.4×25	1.72	EKMR181VSN681MQ25S
	820	22×40	2.11	EKMR181VSN821MP40S
	820	25.4×30	1.94	EKMR181VSN821MQ30S
	1,000	22×45	2.38	EKMR181VSN102MP45S
	1,000	25.4×35	2.24	EKMR181VSN102MQ35S
	1,000	30×25	1.90	EKMR181VSN102MR25S
	1,200	22×50	2.69	EKMR181VSN122MP50S
	1,200	25.4×40	2.52	EKMR181VSN122MQ40S
	1,200	30×30	2.14	EKMR181VSN122MR30S
	1,200	35×25	1.94	EKMR181VSN122MA25S
	1,500	25.4×45	2.88	EKMR181VSN152MQ45S
	1,500	25.4×50	2.94	EKMR181VSN152MQ50S
	1,500	30×35	2.49	EKMR181VSN152MR35S
	1,800	30×40	2.82	EKMR181VSN182MR40S
	1,800	35×30	2.47	EKMR181VSN182MA30S
	2,200	30×45	3.23	EKMR181VSN222MR45S
	2,200	30×50	3.31	EKMR181VSN222MR50S
	2,200	35×35	2.79	EKMR181VSN222MA35S
	2,200	35×40	2.92	EKMR181VSN222MA40S
	2,700	35×45	3.33	EKMR181VSN272MA45S
200	560	22×30	1.66	EKMR201VSN561MP30S
	560	25.4×25	1.56	EKMR201VSN561MQ25S
	680	22×35	1.87	EKMR201VSN681MP35S
	680	25.4×30	1.77	EKMR201VSN681MQ30S
	820	22×40	2.11	EKMR201VSN821MP40S
	820	25.4×35	2.03	EKMR201VSN821MQ35S
	820	30×25	1.72	EKMR201VSN821MR25S
	1,000	22×50	2.45	EKMR201VSN102MP50S
	1,000	25.4×40	2.30	EKMR201VSN102MQ40S
	1,000	30×30	1.95	EKMR201VSN102MR30S
	1,200	25.4×45	2.58	EKMR201VSN122MQ45S
	1,200	30×35	2.23	EKMR201VSN122MR35S
	1,200	35×25	1.94	EKMR201VSN122MA25S
	1,500	25.4×50	2.94	EKMR201VSN152MQ50S
	1,500	30×40	2.58	EKMR201VSN152MR40S
	1,500	35×30	2.25	EKMR201VSN152MA30S
	1,800	30×45	2.92	EKMR201VSN182MR45S
	1,800	35×35	2.53	EKMR201VSN182MA35S
	2,200	30×50	3.31	EKMR201VSN222MR50S
	2,200	35×40	2.92	EKMR201VSN222MA40S
	2,700	35×45	3.33	EKMR201VSN272MA45S

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105℃,120Hz)	Part No.
250	330	22×25	1.21	EKMR251VSN331MP25S
	390	22×30	1.38	EKMR251VSN391MP30S
	470	22×35	1.56	EKMR251VSN471MP35S
	560	22×40	1.74	EKMR251VSN561MP40S
	560	25.4×30	1.61	EKMR251VSN561MQ30S
	560	30×25	1.42	EKMR251VSN561MR25S
	680	22×45	1.97	EKMR251VSN681MP45S
	680	25.4×35	1.85	EKMR251VSN681MQ35S
	820	25.4×40	2.08	EKMR251VSN821MQ40S
	820	25.4×45	2.13	EKMR251VSN821MQ45S
	820	30×30	1.77	EKMR251VSN821MR30S
	820	35×25	1.60	EKMR251VSN821MA25S
	1,000	25.4×50	2.40	EKMR251VSN102MQ50S
	1,000	30×35	2.03	EKMR251VSN102MR35S
	1,200	30×40	2.31	EKMR251VSN122MR40S
	1,200	30×45	2.38	EKMR251VSN122MR45S
	1,200	35×35	2.06	EKMR251VSN122MA35S
	1,500	30×50	2.73	EKMR251VSN152MR50S
	1,500	35×40	2.41	EKMR251VSN152MA40S
	1,800	35×45	2.72	EKMR251VSN182MA45S
	2,200	35×50	3.10	EKMR251VSN222MA50S
315	180	22×25	0.91	EKMR3B1VSN181MP25S
	220	22×30	1.06	EKMR3B1VSN221MP30S
	270	22×35	1.20	EKMR3B1VSN271MP35S
	270	25.4×25	1.15	EKMR3B1VSN271MQ25S
	330	22×40	1.37	EKMR3B1VSN331MP40S
	330	25.4×30	1.30	EKMR3B1VSN331MQ30S
	390	22×45	1.52	EKMR3B1VSN391MP45S
	390	25.4×35	1.48	EKMR3B1VSN391MQ35S
	390	30×25	1.39	EKMR3B1VSN391MR25S
	470	22×50	1.72	EKMR3B1VSN471MP50S
	470	25.4×40	1.67	EKMR3B1VSN471MQ40S
	470	30×30	1.57	EKMR3B1VSN471MR30S
	470	35×25	1.52	EKMR3B1VSN471MA25S
	560	25.4×45	1.86	EKMR3B1VSN561MQ45S
	560	30×35	1.78	EKMR3B1VSN561MR35S
	680	25.4×50	2.10	EKMR3B1VSN681MQ50S
	680	30×40	2.03	EKMR3B1VSN681MR40S
	680	35×30	1.90	EKMR3B1VSN681MA30S
	820	30×45	2.31	EKMR3B1VSN821MR45S
	820	35×35	2.13	EKMR3B1VSN821MA35S
	1,000	30×50	2.61	EKMR3B1VSN102MR50S
	1,000	35×40	2.46	EKMR3B1VSN102MA40S
	1,200	35×45	2.78	EKMR3B1VSN122MA45S
	1,200	35×50	2.86	EKMR3B1VSN122MA50S
350	150	22×25	0.84	EKMR351VSN151MP25S
	220	22×30	1.06	EKMR351VSN221MP30S
	220	25.4×25	1.04	EKMR351VSN221MQ25S
	270	22×35	1.20	EKMR351VSN271MP35S
	270	25.4×30	1.18	EKMR351VSN271MQ30S
	330	22×40	1.37	EKMR351VSN331MP40S
	330	22×45	1.40	EKMR351VSN331MP45S
	330	25.4×35	1.36	EKMR351VSN331MQ35S
	330	30×25	1.28	EKMR351VSN331MR25S
	390	22×50	1.56	EKMR351VSN391MP50S
	390	25.4×40	1.52	EKMR351VSN391MQ40S
	390	30×30	1.43	EKMR351VSN391MR30S
	390	35×25	1.38	EKMR351VSN391MA25S
	470	25.4×45	1.71	EKMR351VSN471MQ45S
	560	25.4×50	1.90	EKMR351VSN561MQ50S
	560	30×35	1.78	EKMR351VSN561MR35S
	560	30×40	1.84	EKMR351VSN561MR40S
	560	35×30	1.72	EKMR351VSN561MA30S
	680	30×45	2.10	EKMR351VSN681MR45S
	680	35×35	1.94	EKMR351VSN681MA35S
	820	30×50	2.36	EKMR351VSN821MR50S

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

KMR Series

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105℃,120Hz)	Part No.
350	820	35×40	2.23	EKMR351VSN821MA40S
	1,000	35×45	2.54	EKMR351VSN102MA45S
	1,200	35×50	2.86	EKMR351VSN122MA50S
400	120	22×25	0.75	EKMR401VSN121MP25S
	180	22×30	0.96	EKMR401VSN181MP30S
	180	25.4×25	0.94	EKMR401VSN181MQ25S
	220	22×35	1.09	EKMR401VSN221MP35S
	220	25.4×30	1.07	EKMR401VSN221MQ30S
	270	22×40	1.24	EKMR401VSN271MP40S
	270	22×45	1.26	EKMR401VSN271MP45S
	270	25.4×35	1.23	EKMR401VSN271MQ35S
	270	30×25	1.16	EKMR401VSN271MR25S
	330	22×50	1.44	EKMR401VSN331MP50S
	330	25.4×40	1.40	EKMR401VSN331MQ40S
	330	30×30	1.31	EKMR401VSN331MR30S
	330	35×25	1.27	EKMR401VSN331MA25S
	390	25.4×45	1.55	EKMR401VSN391MQ45S
	390	30×35	1.49	EKMR401VSN391MR35S
	470	25.4×50	1.74	EKMR401VSN471MQ50S
	470	30×40	1.69	EKMR401VSN471MR40S
	470	35×30	1.58	EKMR401VSN471MA30S
	560	30×45	1.91	EKMR401VSN561MR45S
	560	35×35	1.76	EKMR401VSN561MA35S
	680	30×50	2.15	EKMR401VSN681MR50S
	680	35×40	2.03	EKMR401VSN681MA40S
	820	35×45	2.30	EKMR401VSN821MA45S
	820	35×50	2.37	EKMR401VSN821MA50S
	1,000	35×50	2.50	EKMR401VSN102MA50S
420	120	35×50	0.78	EKMR421VSN121MP25S
	150	22×30	0.91	EKMR421VSN151MP30S
	150	25.4×25	0.89	EKMR421VSN151MQ25S
	180	22×35	1.03	EKMR421VSN181MP35S
	180	25.4×30	1.00	EKMR421VSN181MQ30S
	220	22×40	1.16	EKMR421VSN221MP40S
	220	22×45	1.19	EKMR421VSN221MP45S
	220	25.4×35	1.16	EKMR421VSN221MQ35S
	220	30×25	1.11	EKMR421VSN221MR25S
	270	22×50	1.36	EKMR421VSN271MP50S

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	Rated ripple current (Arms/105℃,120Hz)	Part No.
420	270	25.4×40	1.32	EKMR421VSN271MQ40S
	270	30×30	1.26	EKMR421VSN271MR30S
	270	35×25	1.26	EKMR421VSN271MA25S
	330	25.4×45	1.49	EKMR421VSN331MQ45S
	330	30×35	1.45	EKMR421VSN331MR35S
	390	25.4×50	1.66	EKMR421VSN391MQ50S
	390	30×40	1.63	EKMR421VSN391MR40S
	390	35×30	1.58	EKMR421VSN391MA30S
	470	30×45	1.85	EKMR421VSN471MR45S
	470	35×35	1.77	EKMR421VSN471MA35S
	560	30×50	2.07	EKMR421VSN561MR50S
	560	35×40	2.02	EKMR421VSN561MA40S
	680	35×45	2.29	EKMR421VSN681MA45S
	820	35×50	2.59	EKMR421VSN821MA50S
450	100	22×25	0.71	EKMR451VSN101MP25S
	120	22×30	0.82	EKMR451VSN121MP30S
	150	22×35	0.94	EKMR451VSN151MP35S
	150	25.4×25	0.89	EKMR451VSN151MQ25S
	180	22×40	1.05	EKMR451VSN181MP40S
	180	25.4×30	1.00	EKMR451VSN181MQ30S
	220	22×45	1.19	EKMR451VSN221MP45S
	220	25.4×35	1.16	EKMR451VSN221MQ35S
	220	30×25	1.11	EKMR451VSN221MR25S
	270	22×50	1.36	EKMR451VSN271MP50S
	270	25.4×40	1.32	EKMR451VSN271MQ40S
	270	25.4×45	1.35	EKMR451VSN271MQ45S
	270	30×30	1.26	EKMR451VSN271MR30S
	270	35×25	1.26	EKMR451VSN271MA25S
	330	25.4×50	1.52	EKMR451VSN331MQ50S
	330	30×35	1.45	EKMR451VSN331MR35S
	330	35×30	1.45	EKMR451VSN331MA30S
	390	30×40	1.63	EKMR451VSN391MR40S
	470	30×45	1.85	EKMR451VSN471MR45S
	470	30×50	1.90	EKMR451VSN471MR50S
	470	35×35	1.77	EKMR451VSN471MA35S
	560	35×40	2.02	EKMR451VSN561MA40S
	560	35×45	2.08	EKMR451VSN561MA45S
	680	35×50	2.36	EKMR451VSN681MA50S

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250Vdc	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450Vdc	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.