STB12NK80Z
STP12NK80Z - STW12NK80Z

N-CHANNEL 800V - 0.65Ω - 10.5A - TO220-D²PAK-TO247
Zener-Protected SuperMESH™ MOSFET

General features

Type	V_{DSS}	$R_{DS(on)}$	I_D	Pw
STB12NK80Z	800 V	<0.75 Ω	10.5 A	190 W
STP12NK80Z	800 V	<0.75 Ω	10.5 A	190 W
STW12NK80Z	800 V	<0.75 Ω	10.5 A	190 W

- EXTREMELY HIGH dv/dt CAPABILITY
- IMPROVED ESD CAPABILITY
- 100% AVALANCHE TESTED
- GATE CHARGE MINIMIZED
- VERY LOW INTRINSIC CAPACITANCES
- VERY GOOD MANUFACTURING REPEABILITY

Description

The SuperMESH™ series is obtained through an extreme optimization of ST's well established strip-based PowerMESH™ layout. In addition to pushing on-resistance significantly down, special care is taken to ensure a very good dv/dt capability for the most demanding applications.

Applications

- HIGH CURRENT, HIGH SPEED SWITCHING
- IDEAL FOR OFF-LINE POWER SUPPLIES, ADAPTOR AND PFC

Package

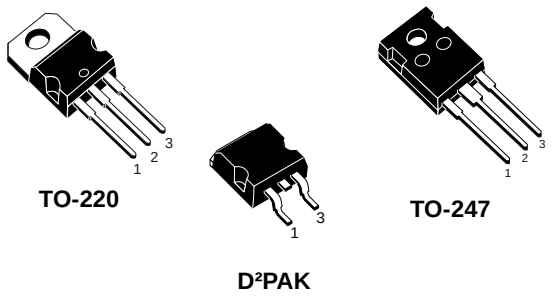

Internal schematic diagram



Order codes

Sales Type	Marking	Package	Packaging
STB12NK80ZT4	B12NK80Z	D²PAK	TAPE & REEL
STP12NK80Z	P12NK80Z	TO-220	TUBE
STW12NK80Z	W12NK80Z	TO-247	TUBE

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DS}	Drain-Source Voltage (V_{GS} = 0)	800	V
V_{DGR}	Drain-gate Voltage (R_{GS} = 20kΩ)	800	V
V_{GS}	Gate-Source Voltage	± 30	V
I_D	Drain Current (continuous) at T_C = 25°C	10.5	A
I_D	Drain Current (continuous) at T_C = 100°C	6.6	A
I_{DM} *Note* 2	Drain Current (pulsed)	42	A
P_{TOT}	Total Dissipation at T_C = 25°C	190	W
	Derating Factor	1.51	W/°C
Vesd(G-S)	G-S ESD (HBM C=100pF, R=1.5kΩ)	6000	V
dv/dt *Note* 1	Peak Diode Recovery voltage slope	4.5	V/ns
T_j T_{stg}	Operating Junction Temperature Storage Temperature	-55 to 150	°C

Table 2. Thermal data

		TO-220/D²PAK	TO-247	Unit
Rthj-case	Thermal Resistance Junction-case Max	0.66		°C/W
Rthj-amb	Thermal Resistance Junction-amb Max	62.5	50	°C/W
T_l	Maximum Lead Temperature For Soldering Purpose	300		°C

Table 3. Avalanche characteristics

Symbol	Parameter	Max Value	Unit
I_{AR}	Avalanche Current, repetitive or Not-Repetitive (pulse width limited by Tj max)	10.5	A
E_{AS}	Single Pulse Avalanche Energy (starting Tj=25°C, I_D=I_{AR}, V_{DD}= 50V)	400	mJ

2 Electrical characteristics

(T_{CASE} = 25 °C unless otherwise specified)

Table 4. On/off states

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	I_D = 1mA, V_{GS}= 0	800			V
I_{DSS}	Zero Gate Voltage Drain Current (V_{GS} = 0)	V_{DS} = Max Rating, V_{DS} = Max Rating,Tc = 125°C			1 50	µA µA
I_{GSS}	Gate Body Leakage Current (V_{DS} = 0)	V_{GS} = ±20V			±10	µA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}= V_{GS}, I_D = 100 µA	3	3.75	4.5	V
$R_{DS(on)}$	Static Drain-Source On Resistance	V_{GS}= 10 V, I_D= 4.5 A		0.65	0.75	Ω

Table 5. Dynamic

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g_{fs} *Note* 4	Forward Transconductance	V_{DS} =15V, I_D = 5.25A		12		S
C_{iss} C_{oss} C_{rss}	Input Capacitance Output Capacitance Reverse Transfer Capacitance	V_{DS} =25V, f=1 MHz, V_{GS}=0		2620 250 53		pF pF pF
$C_{oss\ eq.}$ *Note* 5	Equivalent Ouput Capacitance	V_{GS}=0, V_{DS} =0V to 640V		100		pF
Q_g Q_{gs} Q_{gd}	Total Gate Charge Gate-Source Charge Gate-Drain Charge	V_{DD}=640V, I_D = 10.5 A V_{GS} =10V (see Figure 17)		87 14 44		nC nC nC

Table 6. Switching times

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$ t_r	Turn-on Delay Time Rise Time	V_{DD}=400 V, I_D=5.25 A, R_G=4.7Ω, V_{GS}=10V (see Figure 18)		30 18		ns ns
$t_{d(off)}$ t_f	Turn-off Delay Time Fall Time	V_{DD}=400 V, I_D=5.25A, R_G=4.7Ω, V_{GS}=10V (see Figure 18)		70 20		ns ns
$t_{r(Voff)}$ t_f t_c	Off-voltage Rise Time Fall Time Cross-over Time	V_{DD}=640 V, I_D=10.5A, R_G=4.7Ω, V_{GS}=10V (see Figure 18)		16 15 28		ns ns ns

Table 7. Source drain diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{SD} I_{SDM} *Note* 2	Source-drain Current Source-drain Current (pulsed)				10.5 42	A A
V_{SD} *Note* 4	Forward on Voltage	I_{SD}=10.5 A, V_{GS}=0			1.6	V
t_{rr} Q_{rr} I_{RRM}	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	I_{SD}=10.5A, di/dt = 100A/µs, V_{DD}=100 V, Tj=150°C		635 5.9 18.5		ns µC A

Table 8. Gate-source zener diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV_{GSO} *Note* 6	Gate-Source Breakdown Voltage	Igs=±1mA (Open Drain)	30			V

(1) I_{SD} ≤10.5 A, di/dt ≤200A/µs, V_{DD} ≤ $V_{(BR)DSS}$, T_j ≤ T_{JMAX}

(2) Pulse width limited by safe operating area

(3) Limited only by maximum temperature allowed

(4) Pulsed: pulse duration = 300µs, duty cycle 1.5%

(5) $C_{oss\ eq.}$ is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80%V_{DSS}

(6)The built-in back-to-back Zener diodes have specifically been designed to enhance not only the device's ESD capability, but also to make them safely absorb possible voltage transients that may occasionally be applied from gate to source. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.

2.1 Electrical Characteristics (curves)

Figure 1. Safe Operating Area for TO-220/D²PAK

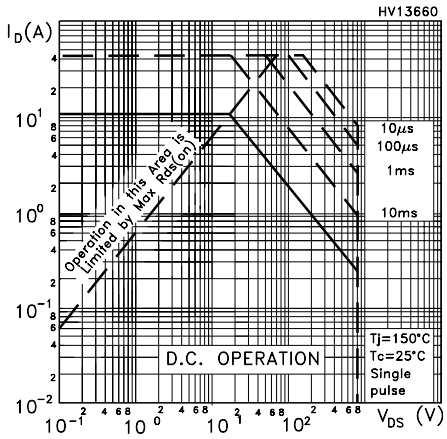

Figure 2. Thermal Impedance for TO-220/D²PAK

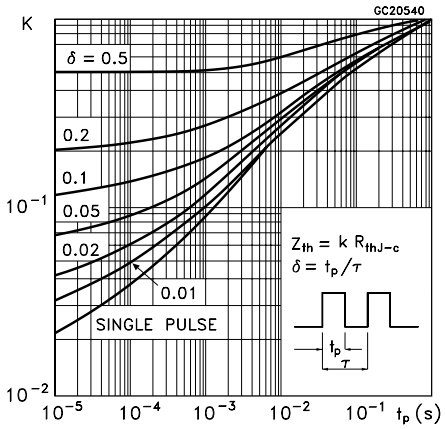

Figure 3. Safe Operating Area for TO-247

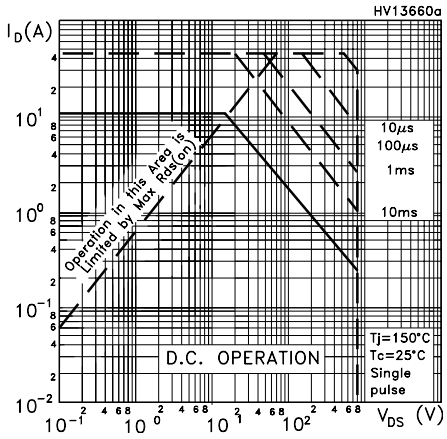

Figure 4. Thermal Impedance for TO-247

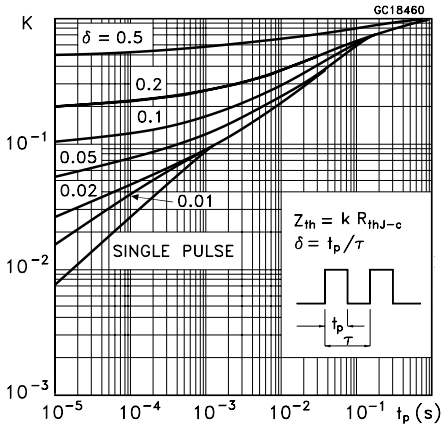

Figure 5. Output Characteristics

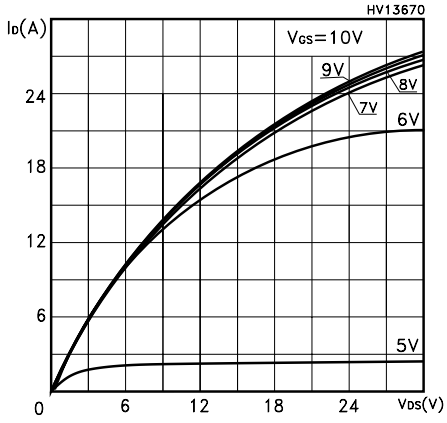

Figure 6. Transfer Characteristics

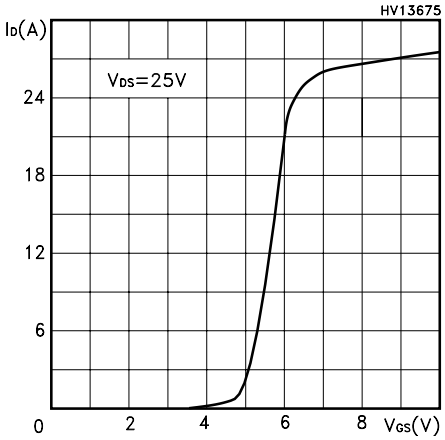

Figure 7. Transconductance

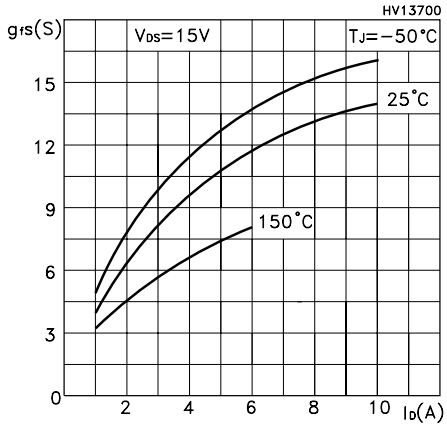

Figure 8. Static Drain-Source on Resistance

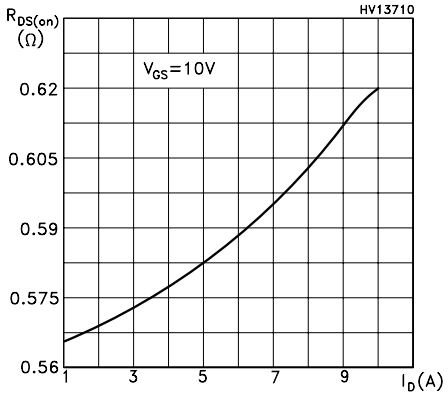

Figure 9. Gate Charge vs Gate -Source Voltage

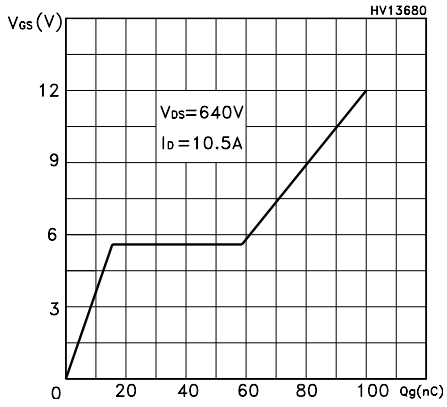

Figure 11. Capacitance Variations

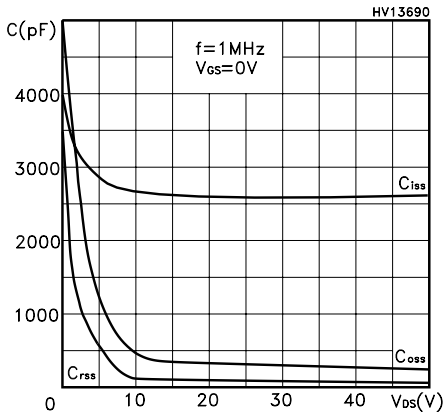

Figure 10. Normalized Gate Threshold Voltage vs Temperatute

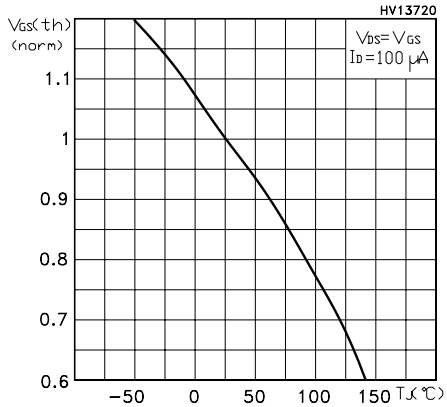

Figure 12. Normalized on Resistance vs Temperature

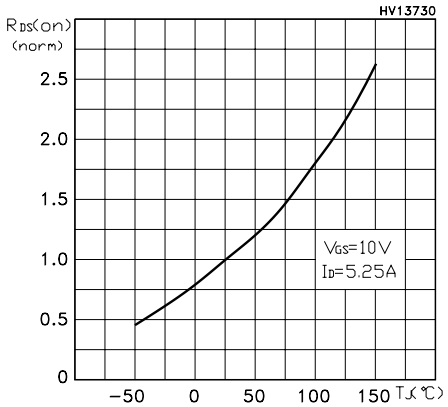

Figure 13. Source-drain Diode Forward Characteristics

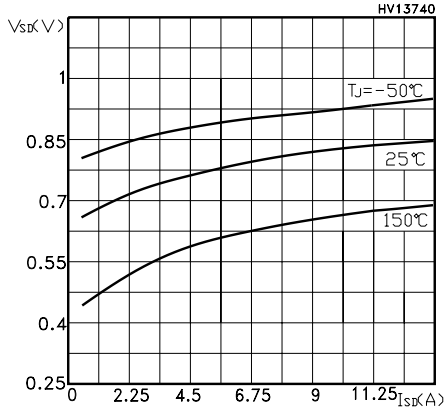

Figure 14. Normalized BVDSS vs Temperature

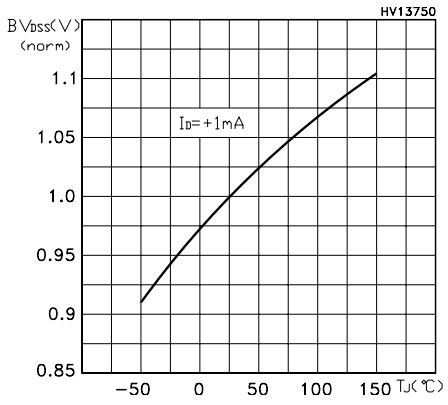

Figure 15. Maximum Avalanche Energy vs Temperature

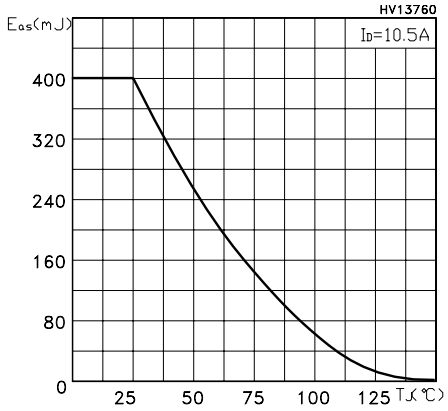

3 Test circuits

Figure 16. Switching Times Test Circuit For Resistive Load

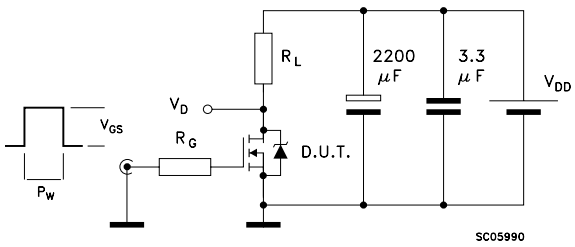

Figure 17. Gate Charge Test Circuit

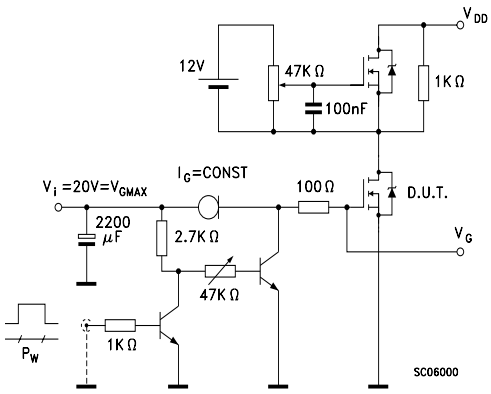

Figure 18. Test Circuit For Indictive Load Switching and Diode Recovery Times

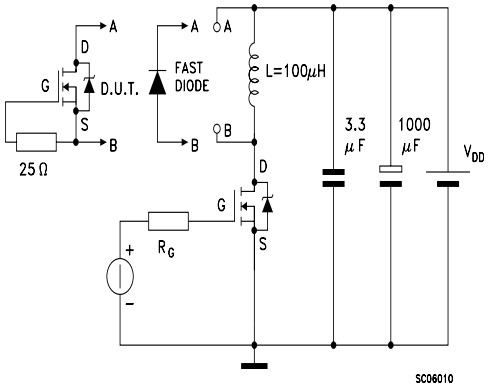

Figure 20. Unclamped Inductive Load Test Circuit

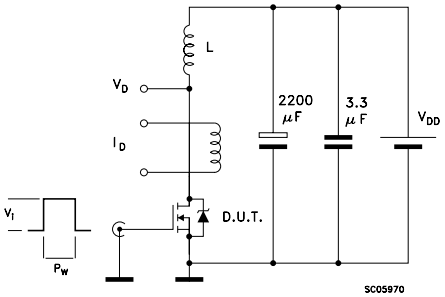

Figure 19. Unclamped Inductive Waveform

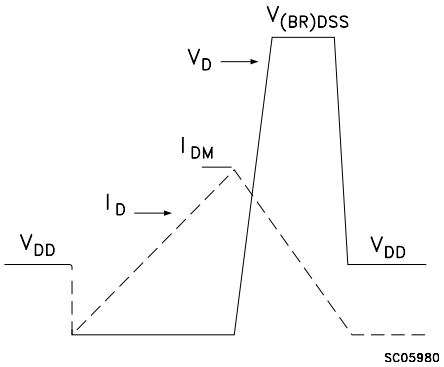

4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com

TO-220 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
b	0.61		0.88	0.024		0.034
b1	1.15		1.70	0.045		0.066
c	0.49		0.70	0.019		0.027
D	15.25		15.75	0.60		0.620
E	10		10.40	0.393		0.409
e	2.40		2.70	0.094		0.106
e1	4.95		5.15	0.194		0.202
F	1.23		1.32	0.048		0.052
H1	6.20		6.60	0.244		0.256
J1	2.40		2.72	0.094		0.107
L	13		14	0.511		0.551
L1	3.50		3.93	0.137		0.154
L20		16.40			0.645	
L30		28.90			1.137	
øP	3.75		3.85	0.147		0.151
Q	2.65		2.95	0.104		0.116

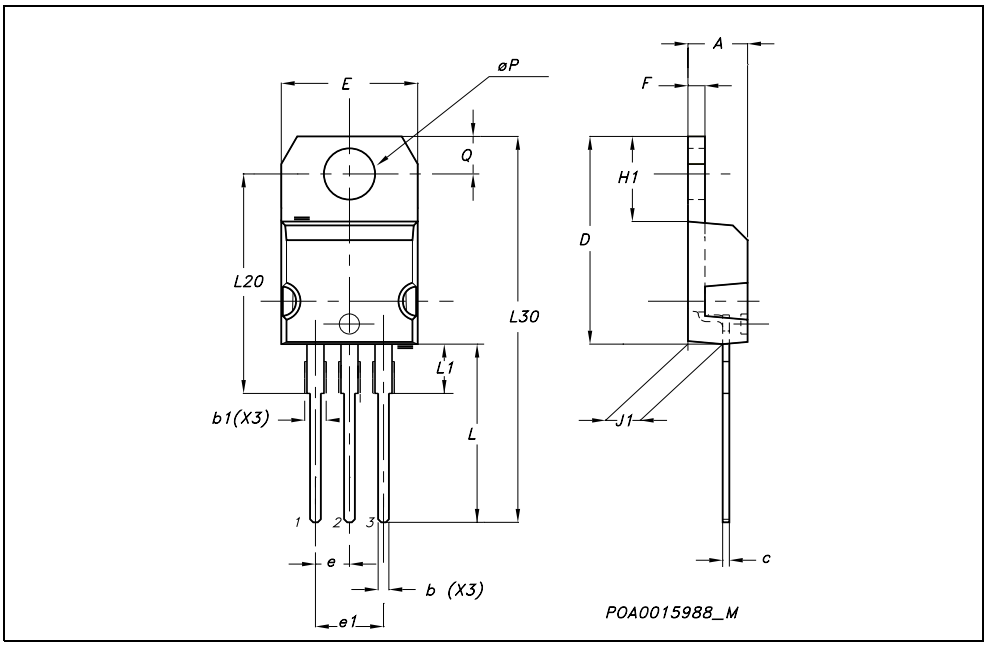

TO-247 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.85		5.15	0.19		0.20
A1	2.20		2.60	0.086		0.102
b	1.0		1.40	0.039		0.055
b1	2.0		2.40	0.079		0.094
b2	3.0		3.40	0.118		0.134
c	0.40		0.80	0.015		0.03
D	19.85		20.15	0.781		0.793
E	15.45		15.75	0.608		0.620
e		5.45			0.214	
L	14.20		14.80	0.560		0.582
L1	3.70		4.30	0.14		0.17
L2		18.50			0.728	
øP	3.55		3.65	0.140		0.143
øR	4.50		5.50	0.177		0.216
S		5.50			0.216	

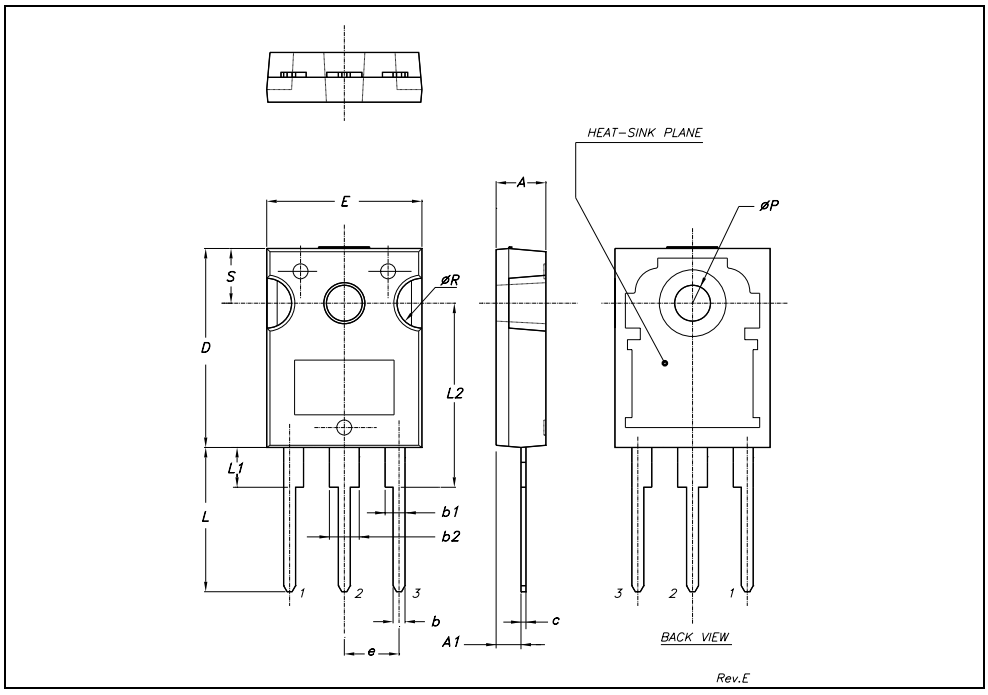

D^2PAK MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.027		0.036
B2	1.14		1.7	0.044		0.067
C	0.45		0.6	0.017		0.023
C2	1.23		1.36	0.048		0.053
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.393		
E1		8.5			0.334	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.590		0.625
L2	1.27		1.4	0.050		0.055
L3	1.4		1.75	0.055		0.068
M	2.4		3.2	0.094		0.126
R		0.4			0.015	
V2	0º		4º			

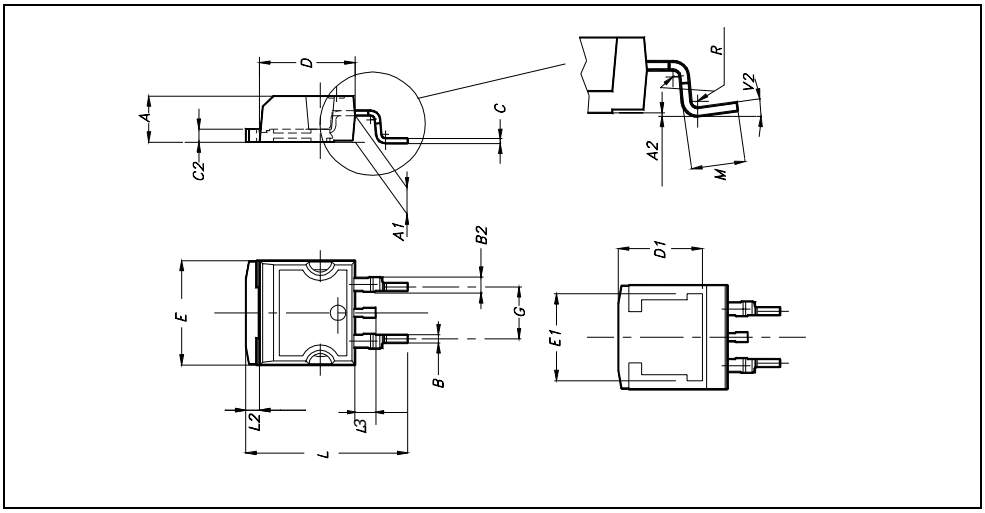

5 Packing mechanical data

D²PAK FOOTPRINT

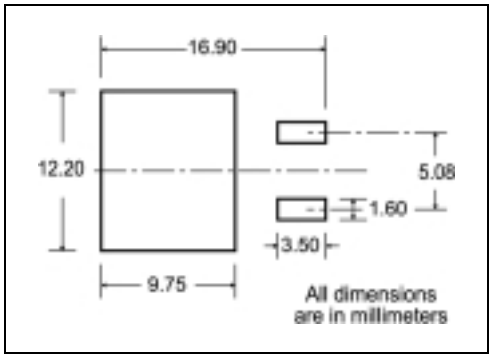

TAPE AND REEL SHIPMENT

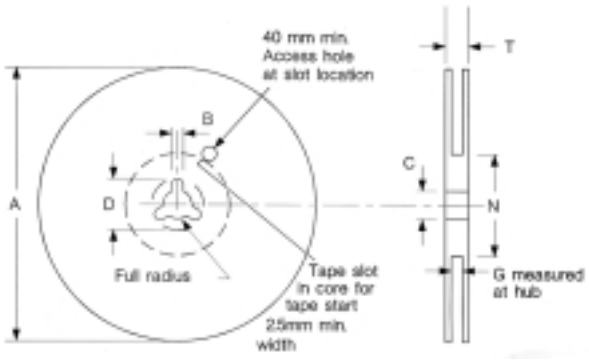

REEL MECHANICAL DATA

DIM.	mm		inch	
	MIN.	MAX.	MIN.	MAX.
A		330		12.992
B	1.5		0.059	
C	12.8	13.2	0.504	0.520
D	20.2		0795	
G	24.4	26.4	0.960	1.039
N	100		3.937	
T		30.4		1.197

BASE QTY	BULK QTY
1000	1000

TAPE MECHANICAL DATA

DIM.	mm		inch	
	MIN.	MAX.	MIN.	MAX.
A0	10.5	10.7	0.413	0.421
B0	15.7	15.9	0.618	0.626
D	1.5	1.6	0.059	0.063
D1	1.59	1.61	0.062	0.063
E	1.65	1.85	0.065	0.073
F	11.4	11.6	0.449	0.456
K0	4.8	5.0	0.189	0.197
P0	3.9	4.1	0.153	0.161
P1	11.9	12.1	0.468	0.476
P2	1.9	2.1	0.075	0.082
R	50		1.574	
T	0.25	0.35	0.0098	0.0137
W	23.7	24.3	0.933	0.956

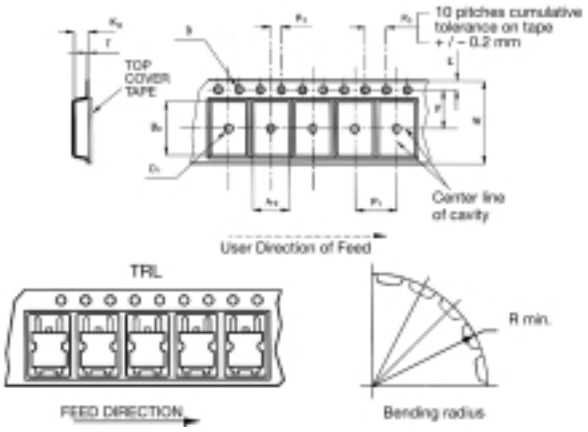

* on sales type

6 Revision History

Date	Revision	Changes
02-Sep-2005	2	Inserted Ecopack indication

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com