

## Features

- Fast Switching Speed
- Ultra-Small Surface Mount Package
- For General Purpose Switching Applications
- High Conductance
- **Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 3, 4 and 5)**
- **Qualified to AEC-Q101 Standards for High Reliability**


## Mechanical Data

- Case: SOT-323
- Case Material: Molded Plastic, "Green" Molding Compound, Note 5. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Polarity: See Diagram
- Marking Information: See Page 2
- Ordering Information: See Page 2
- Weight: 0.006 grams (approximate)



TOP VIEW

SOT-323


 TOP VIEW  
 Internal Schematic

## Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

| Characteristic                            | Symbol              | Value       | Unit |
|-------------------------------------------|---------------------|-------------|------|
| Non-Repetitive Peak Reverse Voltage       | V <sub>RM</sub>     | 100         | V    |
| Peak Repetitive Reverse Voltage           | V <sub>RRM</sub>    | 75          | V    |
| Working Peak Reverse Voltage              | V <sub>RWM</sub>    |             |      |
| DC Blocking Voltage                       | V <sub>R</sub>      |             |      |
| RMS Reverse Voltage                       | V <sub>R(RMS)</sub> | 53          | V    |
| Forward Continuous Current (Note 1)       | I <sub>FM</sub>     | 300         | mA   |
| Average Rectified Output Current (Note 1) | I <sub>O</sub>      | 150         | mA   |
| Non-Repetitive Peak Forward Surge Current | I <sub>FSM</sub>    | @ t = 1.0μs | 2.0  |
|                                           |                     | @ t = 1.0s  | 1.0  |

## Thermal Characteristics

| Characteristic                                      | Symbol                            | Value       | Unit |
|-----------------------------------------------------|-----------------------------------|-------------|------|
| Power Dissipation (Note 1)                          | P <sub>D</sub>                    | 200         | mW   |
| Thermal Resistance Junction to Ambient Air (Note 1) | R <sub>θJA</sub>                  | 625         | °C/W |
| Operating and Storage Temperature Range             | T <sub>J</sub> , T <sub>STG</sub> | -65 to +150 | °C   |

## Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

| Characteristic                     | Symbol             | Min | Max                           | Unit                 | Test Condition                                                                                                                               |
|------------------------------------|--------------------|-----|-------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Reverse Breakdown Voltage (Note 2) | V <sub>(BR)R</sub> | 75  | —                             | V                    | I <sub>R</sub> = 1.0μA                                                                                                                       |
| Forward Voltage                    | V <sub>F</sub>     | —   | 0.715<br>0.855<br>1.0<br>1.25 | V                    | I <sub>F</sub> = 1.0mA<br>I <sub>F</sub> = 10mA<br>I <sub>F</sub> = 50mA<br>I <sub>F</sub> = 150mA                                           |
| Reverse Current (Note 2)           | I <sub>R</sub>     | —   | 1.0<br>50<br>30<br>25         | μA<br>μA<br>μA<br>nA | V <sub>R</sub> = 75V<br>V <sub>R</sub> = 75V, T <sub>J</sub> = 150°C<br>V <sub>R</sub> = 25V, T <sub>J</sub> = 150°C<br>V <sub>R</sub> = 20V |
| Total Capacitance                  | C <sub>T</sub>     | —   | 2.0                           | pF                   | V <sub>R</sub> = 0, f = 1.0MHz                                                                                                               |
| Reverse Recovery Time              | t <sub>rr</sub>    | —   | 4.0                           | ns                   | I <sub>F</sub> = I <sub>R</sub> = 10mA,<br>I <sub>rr</sub> = 0.1 x I <sub>R</sub> , R <sub>L</sub> = 100Ω                                    |

- Notes:
1. Mounted on FR4 PC Board with recommended pad layout which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
  2. Short duration pulse test used to minimize self-heating effect.
  3. No purposefully added lead. Halogen and Antimony Free.
  4. Diodes Inc.'s "Green" policy can be found on our website at [http://www.diodes.com/products/lead\\_free/index.php](http://www.diodes.com/products/lead_free/index.php).
  5. Product manufactured with Green Molding Compound and does not contain Halogens or Sb<sub>2</sub>O<sub>3</sub> Fire Retardants.

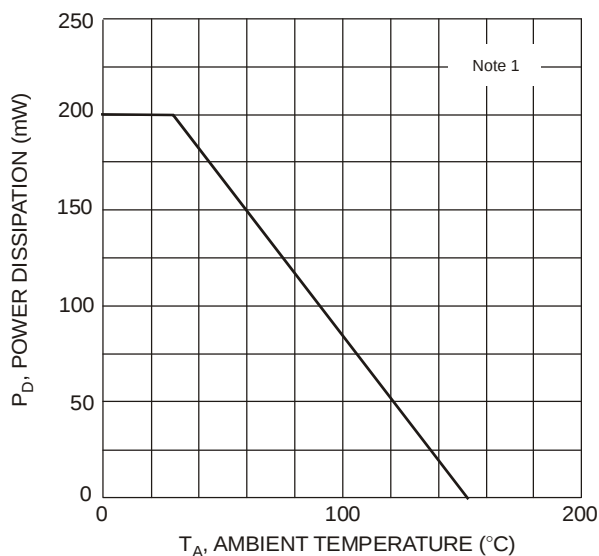


Fig. 1 Power Derating Curve

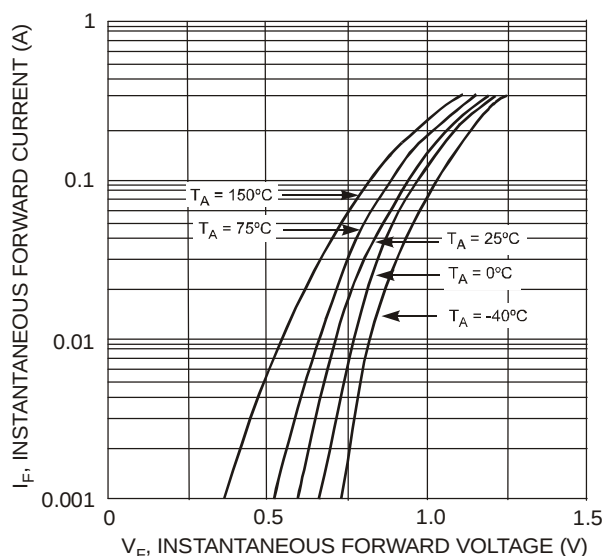


Fig. 2 Typical Forward Characteristics

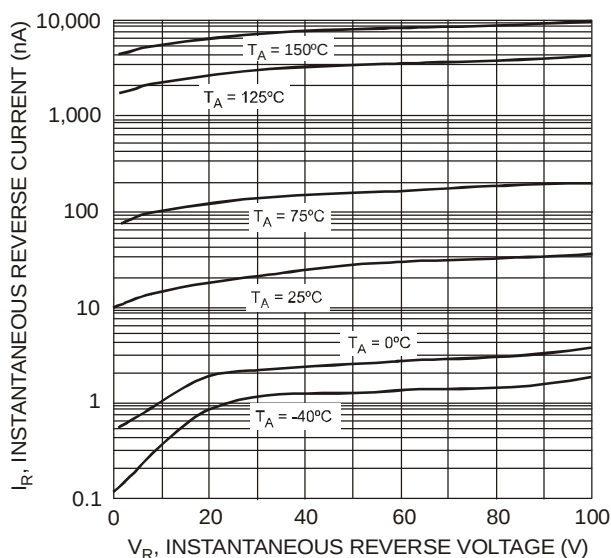


Fig. 3 Typical Reverse Characteristics

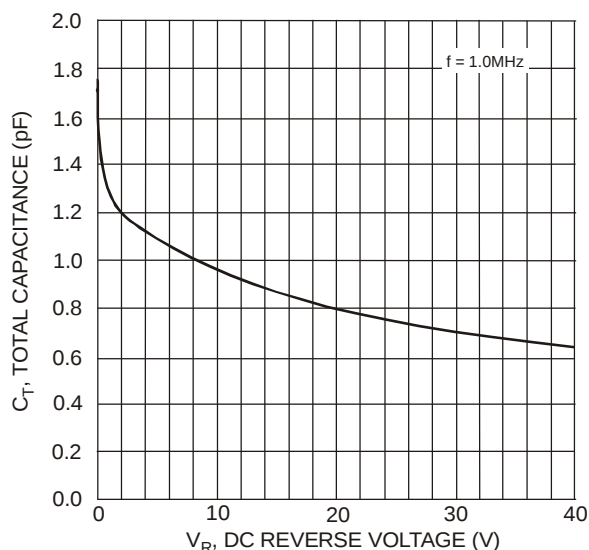



Fig. 4 Total Capacitance vs. Reverse Voltage

## Ordering Information (Notes 5 & 6)

| Device        | Packaging | Shipping         |
|---------------|-----------|------------------|
| MMBD4148W-7-F | SOT-323   | 3000/Tape & Reel |
| BAS16W-7-F    | SOT-323   | 3000/Tape & Reel |

Notes: 6. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

## Marking Information



xxx = Product Type Marking Code (KA2, KT1)  
 YM = Date Code Marking  
 Y = Year ex: N = 2002  
 M = Month ex: 9 = September


### Date Code Key

| Year | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | L    | M    | N    | P    | R    | S    | T    | U    | V    | W    | X    | Y    | Z    |


| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |

## Package Outline Dimensions

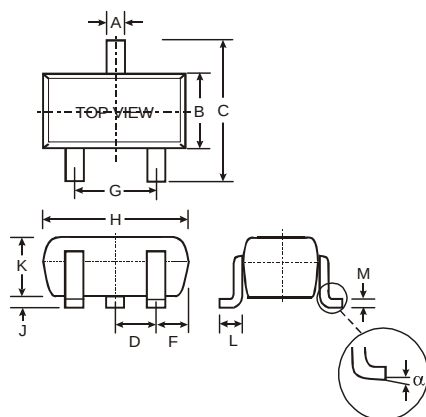

| SOT-323              |              |      |
|----------------------|--------------|------|
| Dim                  | Min          | Max  |
| A                    | 0.25         | 0.40 |
| B                    | 1.15         | 1.35 |
| C                    | 2.00         | 2.20 |
| D                    | 0.65 Nominal |      |
| F                    | 0.30         | 0.40 |
| G                    | 1.20         | 1.40 |
| H                    | 1.80         | 2.20 |
| J                    | 0.0          | 0.10 |
| K                    | 0.90         | 1.00 |
| L                    | 0.25         | 0.40 |
| M                    | 0.10         | 0.18 |
| $\alpha$             | 0°           | 8°   |
| All Dimensions in mm |              |      |

## Suggested Pad Layout

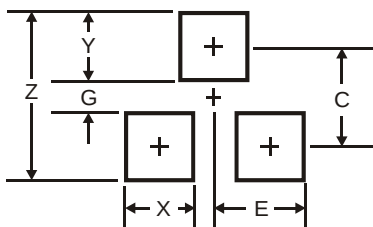

| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 2.8           |
| G          | 1.0           |
| X          | 0.7           |
| Y          | 0.9           |
| C          | 1.9           |
| E          | 0.65          |

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.