
This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0357253810

Status: Active

Description: 6.35mm (.250") Tab Slip-On Wire-to-Wire Terminal, Female, 20-22 AWG, Post-Tin Plated

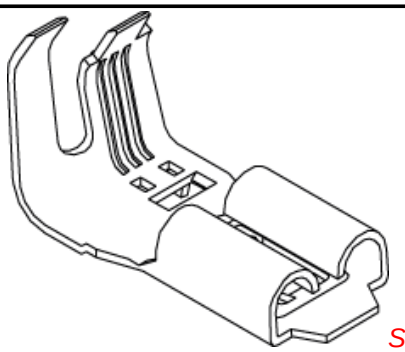

Series image - Reference only

Documents:

Drawing (PDF)
Product Specification PS-35254-001 (PDF)
Product Specification PS-35725-002 (PDF)
Product Specification PS-35725-005 (PDF)
Product Specification PS-35955-001 (PDF)
RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Terminals
Series	35725
Crimp Quality Equipment	Yes
Product Name	N/A

Physical

Gender	Female
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Packaging Type	Reel
Plating min: Mating (µin)	39
Plating min: Mating (µm)	1
Wire Insulation Diameter	5.00mm (.197") max.
Wire Size AWG	20, 22
Wire Size mm²	N/A

Material Info

Reference - Drawing Numbers

Product Specification	PS-35254-001, PS-35725-002, PS-35725-005, PS-35955-001
Sales Drawing	SD-35725-3**0

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here


Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
35725Series

Mates With
35725-1910


This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

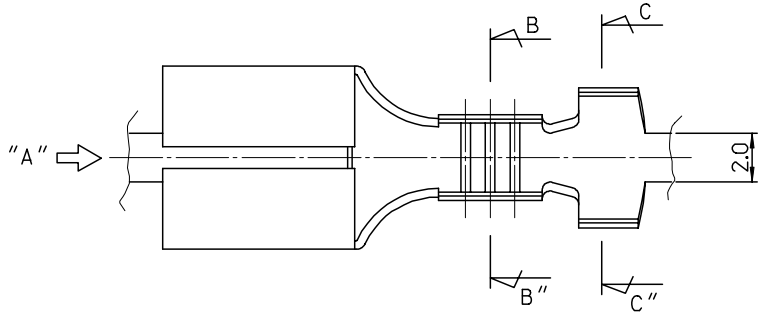


NOTES


1. MATERIAL : BRASS, 0.35mm THICKNESS
2. RECOMMENDED LENGTH OF WIRE STRIP IS 5.2-5.8 mm
3. FINISH, TENSION : SEE TABLE




VIEW "A"

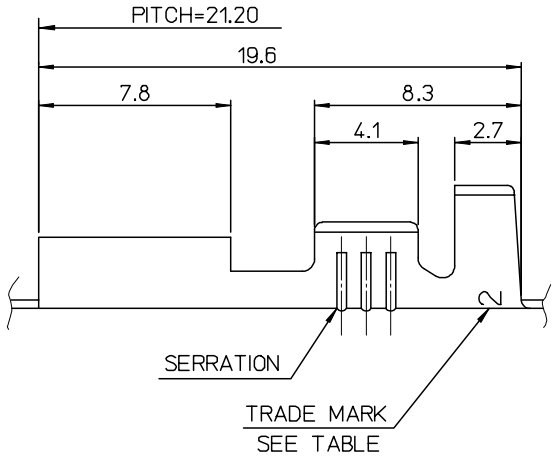

ENG. NO.	a	b	c	d	e	WIRE RANGE	PLATED	TRADE MARK	TENSION
35725-3600	5.2	4.6	6.3	6.3	2.9	AWG #14-#12	(UNPLATED)	MK2	STANDARD TENSION
35725-3700	3.5	3.5	5.7	5.0		AWG #18-#14			
35725-3800	2.85	2.9	3.8	3.8		AWG #22-#20			
35725-3610	5.2	4.6	6.3	6.3	2.9	AWG #14-#12	(POST-TIN PLATING)	MK2	
35725-3710	3.5	3.5	5.7	5.0		AWG #18-#14			
35725-3810	2.85	2.9	3.8	3.8		AWG #22-#20			
35725-3601	5.2	4.6	6.3	6.3	2.95	AWG #14-#12	(UNPLATED)	L MK2	LOW TENSION
35725-3701	3.5	3.5	5.7	5.0		AWG #18-#14			
35725-3801	2.85	2.9	3.8	3.8		AWG #22-#20			



SECTION B-B"



SECTION C-C"

REVISED
EC NO: KOR2008-0030 2007/09/10
DRWN: JHPARK01 2007/09/10
CHKD: WY.YANG 2007/09/10
APPR: YUNSIKKIM 2007/09/10
DESCRIPTION
REV
A

QUALITY SYMBOLS
▼=0
▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.3	± ---
1 PLACE	± 0.3	± ---
ANGULAR ± 1 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JS.KANG DATE: 93/04/27
CHECKED BY: BK.CHOI DATE: 93/04/27
APPROVED BY: CW.LEE DATE: 93/04/27
MATERIAL NO.: SEE TABLE

TITLE: .250 SLIP-ON RECEPTACLE TERMINAL

MOLEX INCORPORATED

DOCUMENT NO.: SD-35725-3**0
SHEET NO.: 1 OF 01

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION