



NPN 2N5671 – 2N5672

HIGH CURRENT FAST SWITCHING APPLICATIONS

The 2N5671 and 2N5672 are silicon multiepitaxial planer NPN transistors in Jedec TO-3. They are especially intended for high current, fast switching industrial applications. Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit	
V_{CEO}	Collector-Emitter Voltage	2N5671	90	V	
		2N5672	120		
V_{CBO}	Collector-Base Voltage	2N5671	120	V	
		2N5672	150		
V_{EBO}	Emitter-Base Voltage	2N5671	7.0	V	
		2N5672			
V_{CEX}	Collector-Emitter Voltage	$V_{EB} = -1.5V$ $R_{EB} = 50 \Omega$	2N5671	120	V
			2N5672	150	
V_{CER}	Collector-Emitter Voltage	$R_{EB} \leq 50 \Omega$	2N5671	110	V
			2N5672	140	
I_C	Collector Current	2N5671	30	A	
		2N5672			
I_B	Base Current	2N5671	10	A	
		2N5672			
P_D	Total Device Dissipation @ $T_C = 25^\circ$	2N5671	140	W	
		2N5672			
T_J	Junction Temperature	2N5671	200	$^\circ C$	
		2N5672			
T_{Stg}	Storage Temperature	2N5671	-65 to +200	$^\circ C$	
		2N5672			

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R_{thJC}	Thermal Resistance, Junction to Case	1.25	$^\circ C/W$



NPN 2N5671 – 2N5672

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage (*)	$I_C=200\text{ mA}$, $I_B=0$	2N5671 2N5672	90 120	--	--	V
$V_{CER(SUS)}$	Collector-Emitter Sustaining Voltage (*)	$I_C=0.2\text{ A}$, $R_{BE}=50\Omega$	2N5671 2N5672	110 140	--	--	V
$V_{CEX(SUS)}$	Collector-Emitter Sustaining Voltage (*)	$I_C=0.2\text{ A}$, $V_{BE}=-1.5\text{ V}$ $R_{BE}=50\Omega$	2N5671 2N5672	120 150	--	--	V
I_{CEO}	Collector Cutoff Current	$V_{CE}=80\text{ V}$	2N5671 2N5672	- -	- -	10	mA
I_{CEX}	Collector Cutoff Current	$V_{CE}=110\text{ V}$, $V_{EB}=-1.5\text{ V}$	2N5671	-	-	12	mA
		$V_{CE}=135\text{ V}$, $V_{EB}=-1.5\text{ V}$	2N5672	-	-	10	
		$V_{CE}=100\text{ V}$, $V_{EB}=-1.5\text{ V}$	2N5671	-	-	15	
		$T_C=150^\circ\text{C}$	2N5672	-	-	10	
I_{EBO}	Emitter Cutoff Current	$V_{BE}=7.0\text{ V}$, $I_C=0$	2N5671 2N5672	- -	- -	10	mA
h_{FE}	DC Current Gain (*)	$I_C=15\text{ A}$, $V_{CE}=2.0\text{ V}$	2N5671 2N5672	20 20	- -	100 -	-
			2N5671 2N5672	20 20	- -	- -	
		$I_C=20\text{ A}$, $V_{CE}=5.0\text{ V}$	2N5671 2N5672	20 20	- -	- -	
			2N5671 2N5672	20 20	- -	- -	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=15\text{ A}$, $I_B=1.2\text{ A}$	2N5671 2N5672	- -	- -	0.75	V
$V_{BE(SAT)}$	Base-Emitter saturation Voltage (*)	$I_C=15\text{ A}$, $I_B=1.2\text{ A}$	2N5671 2N5672	- -	- -	1.5	
V_{BE}	Base-Emitter Voltage (*)	$I_C=15\text{ A}$, $V_{CE}=5.0\text{ V}$	2N5671 2N5672	- -	- -	1.6	V
f_T	Transition frequency	$V_{CE}=10\text{ V}$, $I_C=2\text{ A}$	2N5671 2N5672	50 50	- -	- -	MHz
$I_{s/b}$	Second Breakdown energy (**)	$V_{CE}=24\text{ V}$	2N5671	5.8	-	-	A
		$V_{CE}=45\text{ V}$	2N5672	0.9	-	-	
$E_{s/b}$	Second Breakdown energy	$V_{BE}=-4\text{ V}$, $R_{BE}=20\Omega$ $L=180\mu\text{H}$	2N5671	20	-	-	mJ
			2N5672	20	-	-	
C_{BO}	Collector-Base Capacitance	$I_E=0$, $V_{CB}=10\text{ V}$ $f=1\text{ MHz}$	2N5671	-	-	900	pF
			2N5672	-	-	900	



NPN 2N5671 – 2N5672

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)		Min	Typ	Max	Unit
$t_{on\ ts\ tf}$	Turn-on time Storage time File time	$I_C=15\text{ A}$, $V_{CC}=30\text{ V}$ $I^{B1} = -I_{B2} =1.2\text{ A}$	2N5671	-	-	0.5	μs
			2N5672				
			2N5671	-	-	1.5	
			2N5672				
			2N5671	-	-	0.5	
			2N5672				

(*) Pulse Width $\approx 300\text{ }\mu\text{s}$, Duty Cycle =1.5%


(**) Pulsed : 1 s, non repetitive pulse




NPN 2N5671 – 2N5672

MECHANICAL DATA CASE TO-3

DIMENSIONS (mm)			
	min	typ	max
A	11	-	13.10
B	0.97	-	1.15
C	1.5	-	1.65
D	8.32	-	8.92
E	19	-	22
G	10.70	-	11.1
N	16.50	-	17.20
P	25	-	27.20
R	3.84	-	4.21
U	38.50	-	40.13
V	29.90	-	30.40

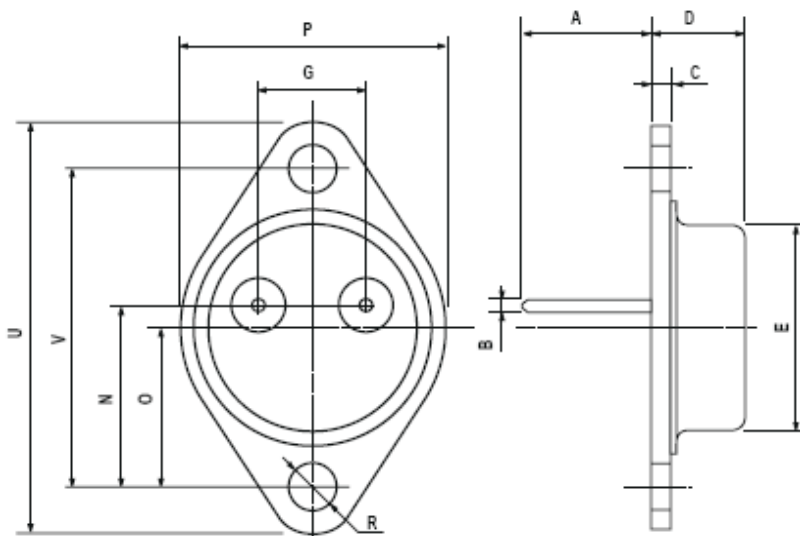

Pin 1 :	Base
Pin 2 :	Emitter
Case :	Collector



Revised October 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.