


G=2-9






SCHEMATIC

Rating	DC 50V 0.3A
Circuit	1P - 2T
Timing	Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycle)	10,000 Min.

9.0mm
8.0mm
7.0mm
6.0mm
5.0mm
4.0mm
3.0mm
2.0mm
G (mm)

P.C.B MOUNTING PATTERN

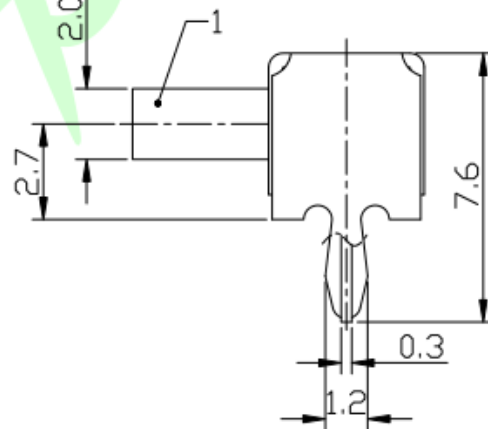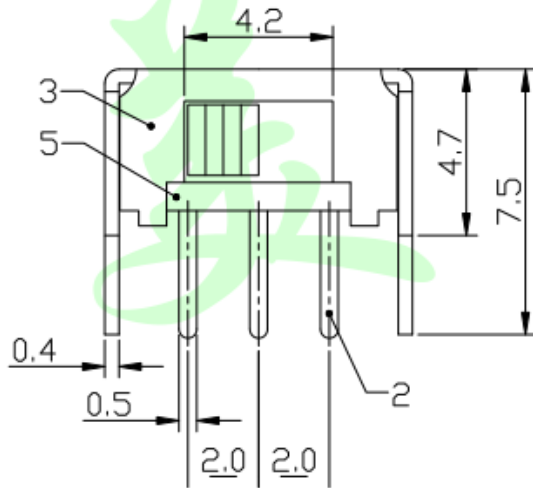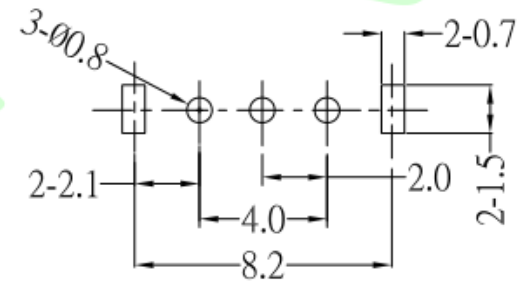

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
	SPRING	1	STAINLESS STEEL	Ag-Plated
	TERMINAL	3	BRASS	Ag-Plated
	BASE	1	PHENOL IC RESIN	Natural
	FRAME	1	SPCC	Ni-Plated
	KNOB	1	POM	Black

>0.5~2	±0.05	±0.10	±0.15
>2~5	±0.15	±0.20	±0.25
>5~10	±0.25	±0.28	±0.30
角度 ANGLE	±0.5°		
未注尺寸公差 (mm)			

第一视角	设计 Jack Jin	图面 单位 A4	MM
	审核 Jacky Zhong	比例 重量	
	批准 Tony Meng	页码 版次	1/1 A/0

东莞市美韩电子科技有限公司 Dongguan Usakro Electronic Technology Co., Ltd.			
1:1	DWG NO.	型号: SK-12D07-VG3 / 短路	SIZE A4
1 of 1	PART NO.	规格: 8.7*4.4 / 柄高3.0mm	VER R