

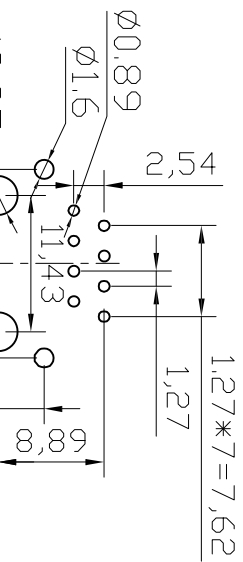
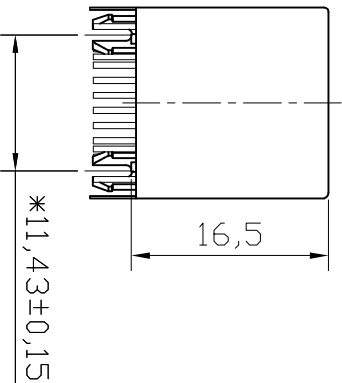
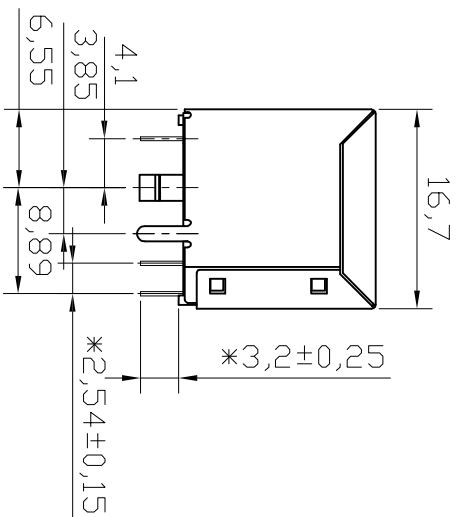


GREEN LED-L  
YELLOW LED-R



NOTES:  
MATERIAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE F =0.46mm.
3. PLATING : SELECTING GOLD PLATING 3u"~50u" OVER NICKEL
4. SHIELD : 0.20mm THICKNESS COPPER ALLY WITH NICKEL PLATED

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY: : 750 CYCLES MIN.
  2. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- ENVIRONMENTAL:
1. STORAGE : -40° C TO 85° C.
  2. OPERATION : 0° C TO 70° C.

PART NUMBER:

TOLERANCE TABLE

.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	<p>深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD</p>
CHECKED:	DATE:	
DRAWN:	DATE:	TITLE: RJ45-8P/8C 直插 带灯 带屏蔽
SXA	2019-04-27	PROD. P/N : R-RJ45S08P-C000
		UNIT : mm
		SCALE : Free
		FILE NO. : /
		REV. : A HY04