



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V3L-22

CQ-A2200

V3L-22

M

DRAWING NUMBER

ISSUE

4

REPLACES

SR12837

RELEASE NO.

CHECK

REVISIONS


A	C031609	22 JAN 73
B	CO 3097	1 OCT 83
C	CO-76305	30 NOV 93

CHECK


CHECK

CHECK

CHECK

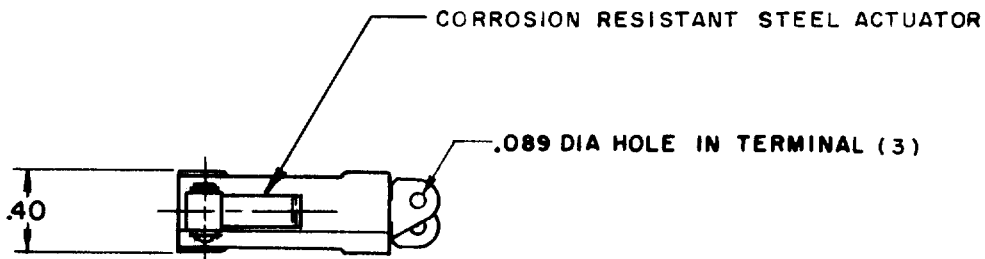

.19 DIA X .19 WIDE OIL BRONZE ROLLER
(CONCENTRICITY .005 T I R)

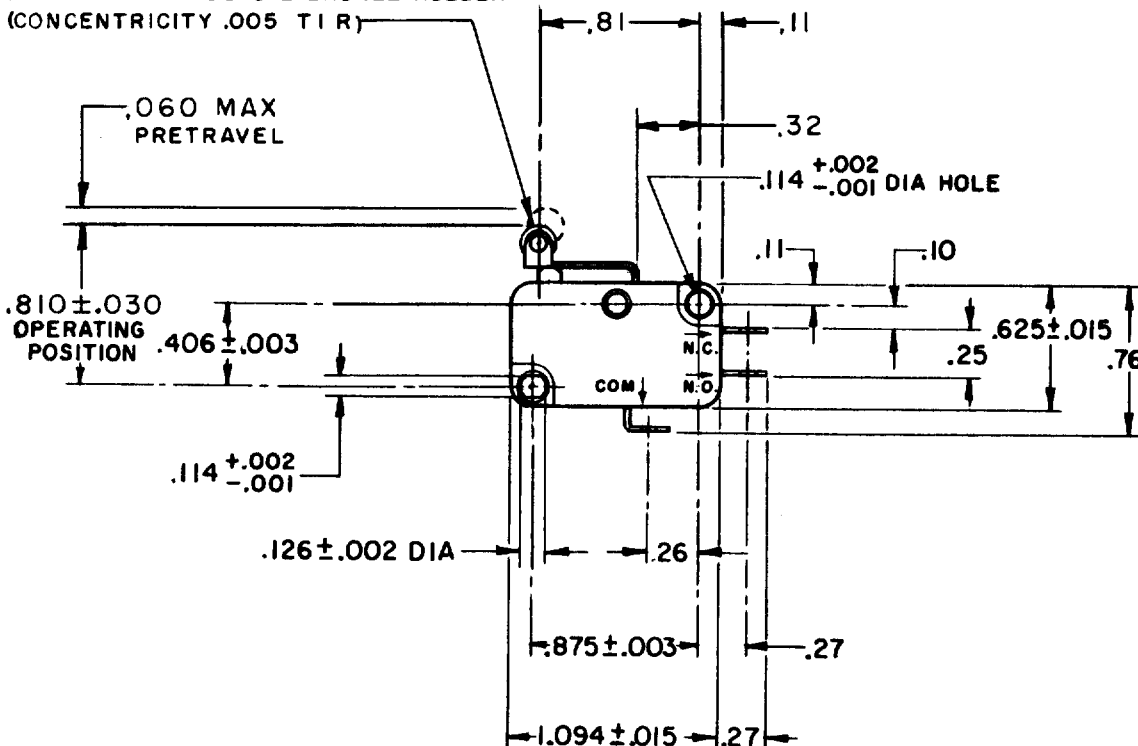

NOTE -
1- TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 14 OZ MAX

RELEASE FORCE — — — 3 OZ MIN

DIFFERENTIAL TRAVEL — — — .016 MAX

OVERTRAVEL — — — .040 MIN

RELEASE TRAVEL — — — .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L83
15.1A 1/2HP 125 OR 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

FO-50378

DRAWN

M B F 5 MAY 67