1) Seitenwandeinfall ist
0,05 mm max. pro Seite

inward warpage is
0,05 mm max.
on each side

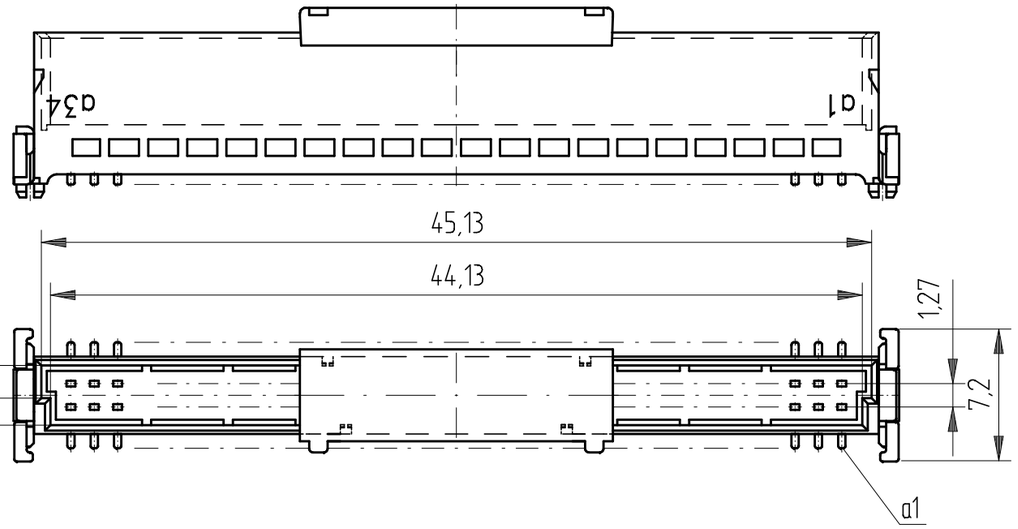

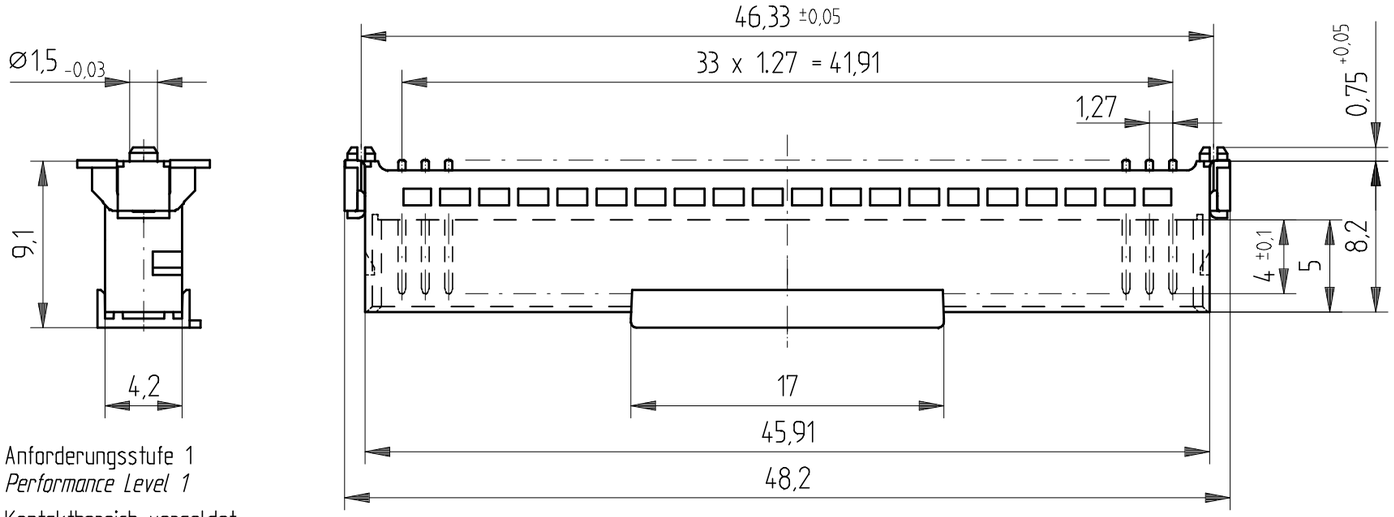

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanaritaet der Anschluesse ≤ 0.1mm
Coplanarity Area of Termination ≤ 0.1 mm

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

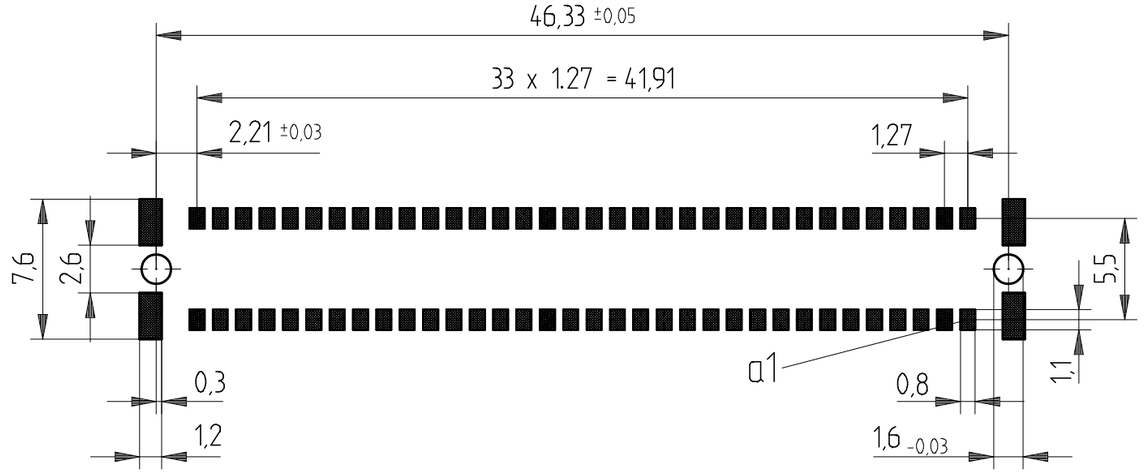

Verpackt in Gurtverpackung - *Tape on Reel Packaging*
Verpackungseinheit: 280 Stück - *Packaging unit: 280 pcs*

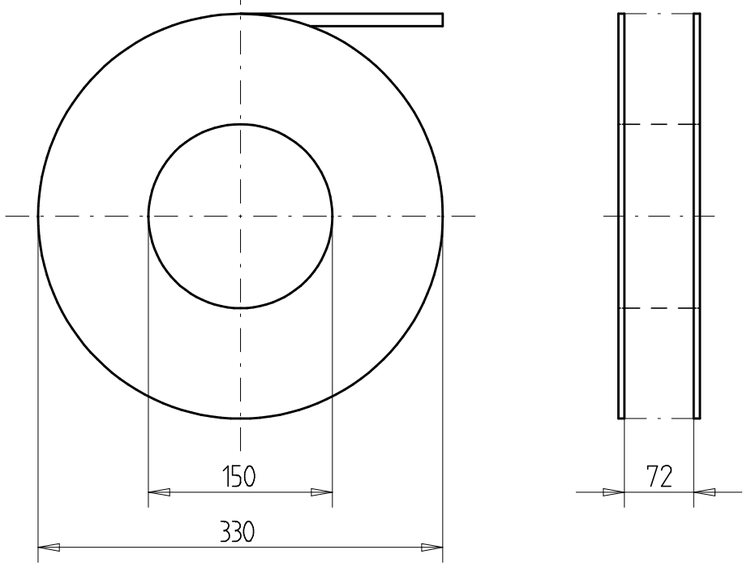

Abspulrichtung - *Reel off Direction*

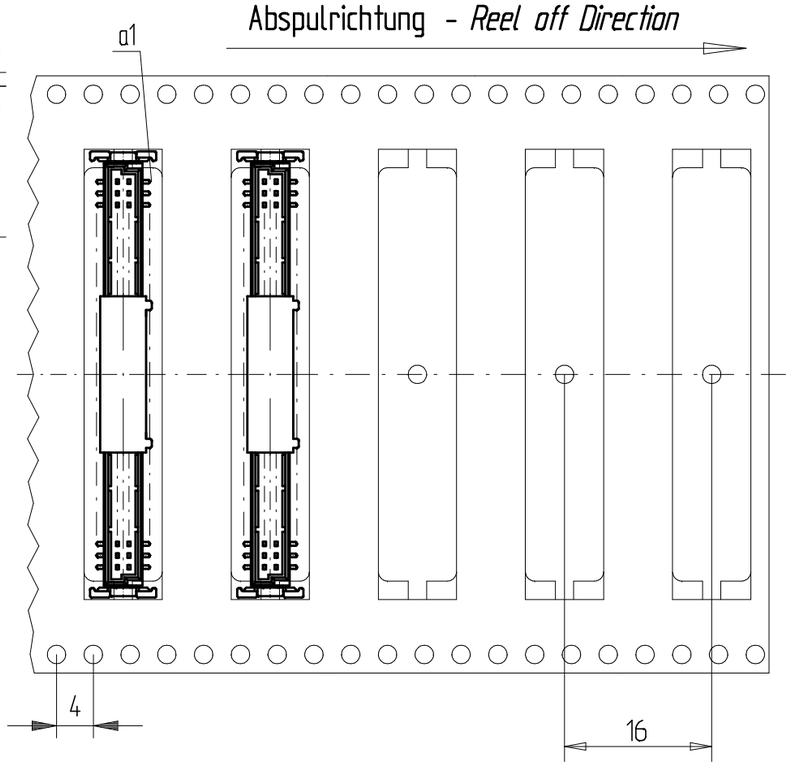

Standard Bauhöhe	
Standard Assembly Height	

Consider protection memo from DIN 34

Information:	Tolerances ISO 2768-mH / All Dimensions in mm	Scale 3:1	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation: Messerleiste SMC-Q, 68 polig / *Male Conn. SMC-Q, 68 contacts*	
	ERNI www.ERNI.com	100201940001	K1
b / Index	03.02.2011 / Date	0:00070847.SZA	SMCQ