Data sheet | Item number: 706-3057/200-300


System cable; for Schneider TSX; 12 digital outputs; Length: 3 m; Conductor

.

MAGO

www.wago.com/706-3057/200-300

cross-section: 0.14 mm²

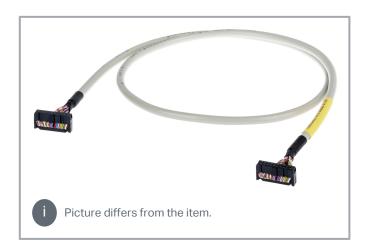

Data Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data

Inputs/outputs	12 digital outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

XX
-K
RFK
DTK
nnector per DIN 41651; Female connector
nnector per DIN 41651; Female connector
_

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 706-3057/200-300

www.wago.com/706-3057/200-300



Cable type	LiYY
Wire cross-section	0.14 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length 3 m

Material data

Weight 229 g

Environmental requirements

Surrounding air temperature (operation) -20 ... 50 °C

Commercial data

PU (SPU)	1 Stück
Packaging type	box
GTIN	4050821355113
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables	545.9 kB	
for the controller you are usng.		

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3057/200-300

System cable; for Schneider TSX; 12 digital outputs; Length: 3 m; Conductor cross-section: 0.14 mm²

URL

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.