

# Preliminary Data Sheet

Surface Mount Multilayer Ceramic Chip Capacitors (SMD MLCCs)

## U2J Dielectric, 10 - 50 VDC (Commercial Grade)

Electronic Components

**KEMET**  
CHARGED®

### Overview


KEMET's U2J dielectric features a maximum operating temperature of 125°C and is considered stable. The Electronics Industries Alliance (EIA) characterizes U2J dielectric as a Class I material. Components of this classification are temperature compensating and are suited for resonant circuit applications or those where Q and stability of capacitance characteristics are required. U2J is an extremely stable dielectric material that exhibits a negligible shift in capacitance with respect to voltage and boasts a predictable and linear change in capacitance with reference to ambient temperature with no aging effect. In addition, U2J dielectric extends the available capacitance range

of Class I MLCCs to achieve values previously only available using Class II dielectric materials like X7R, X5R, Y5V and Z5U. U2J is not sensitive to DC Bias as compared to Class II dielectric materials and retains over 99% of nominal capacitance at full rated voltage.

Capacitance change is limited to  $-750 \pm 120$  ppm / °C from -55°C to +125°C. These devices are Lead-free, RoHS and REACH compliant without exception and are capable of withstanding multiple passes through a Lead-free solder reflow profile.

### Benefits

- Operating temperature range of -55°C to +125°C
- Lead (Pb)-free, RoHS and REACH compliant
- EIA 0402, 0603, 0805, 1206, 1210 and 1812 case sizes
- DC voltage ratings of 10 V, 16 V, 25 V and 50 V
- Capacitance offerings ranging from 1.0 nF up to 470 nF
- Available capacitance tolerances of  $\pm 1\%$ ,  $\pm 2\%$ ,  $\pm 5\%$ ,  $\pm 10\%$  and  $\pm 20\%$
- Low noise solution similar to C0G
- Low dissipation factor DF < 0.1%
- Low ESR & ESL
- High thermal stability
- High ripple current capability

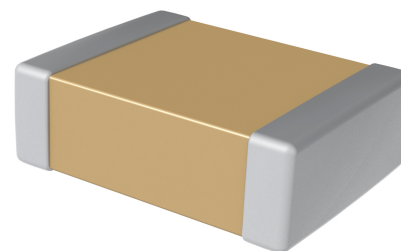

### Ordering Information

| C       | 1206                                         | C                                  | 104                                       | J                                                                                   | 3                                    | J          | A                    | C                               | TU                                                  |
|---------|----------------------------------------------|------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------|------------|----------------------|---------------------------------|-----------------------------------------------------|
| Ceramic | Case Size (L" x W")                          | Specification/ Series <sup>1</sup> | Capacitance Code (pF)                     | Capacitance Tolerance <sup>2</sup>                                                  | Rated Voltage (VDC)                  | Dielectric | Failure Rate/ Design | Termination Finish <sup>3</sup> | Packaging/Grade (C-Spec)                            |
|         | 0402<br>0603<br>0805<br>1206<br>1210<br>1812 | C = Standard                       | Two significant digits + number of zeros. | F = $\pm 1\%$<br>G = $\pm 2\%$<br>J = $\pm 5\%$<br>K = $\pm 10\%$<br>M = $\pm 20\%$ | 8 = 10<br>4 = 16<br>3 = 25<br>5 = 50 | J = U2J    | A = N/A              | C = 100% Matte Sn               | See "Packaging C-Spec Ordering Options Table" below |

<sup>1</sup> Flexible termination option is available. Please see FT-CAP product bulletin C1062\_C0G\_FT-CAP\_SMD

<sup>2</sup> Additional capacitance tolerance offerings may be available. Contact KEMET for details.

# Preliminary Data Sheet

## Packaging C-Spec Ordering Options Table

| Packaging Type <sup>1</sup>               | Packaging/Grade<br>Ordering Code (C-Spec)                                       |
|-------------------------------------------|---------------------------------------------------------------------------------|
| Bulk Bag/Unmarked                         | Not required (Blank)                                                            |
| 7" Reel/Unmarked                          | TU                                                                              |
| 13" Reel/Unmarked                         | 7411 (EIA 0603 and smaller case sizes)<br>7210 (EIA 0805 and larger case sizes) |
| 7" Reel/Unmarked/2 mm pitch <sup>2</sup>  | 7081                                                                            |
| 13" Reel/Unmarked/2 mm pitch <sup>2</sup> | 7082                                                                            |

<sup>1</sup> Default packaging is "Bulk Bag". An ordering code C-Spec is not required for "Bulk Bag" packaging.

<sup>1</sup> The terms "Marked" and "Unmarked" pertain to laser marking option of capacitors. All packaging options labeled as "Unmarked" will contain capacitors that have not been laser marked. The option to laser mark is not available on these devices. For more information see "Capacitor Marking".

<sup>2</sup> The 2 mm pitch option allows for double the packaging quantity of capacitors on a given reel size. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information".

## Benefits cont'd

- Preferred capacitance solution at line frequencies & into the MHz range
- Small predictable and linear capacitance change with respect to temperature
- Non-polar device, minimizing installation concerns
- 100% pure matte Tin-plated termination finish allowing for excellent solderability
- Retains 99% of nominal capacitance at full rated voltage

## Applications

Typical applications include critical timing, tuning, circuits requiring low loss, circuits with pulse, high current, decoupling, bypass, filtering, transient voltage suppression and blocking, as well as energy storage in critical and safety relevant circuits without (integrated) current limitation, including those subject to high levels of board flexure or temperature cycling.

## Qualification/Certification

Commercial Grade products are subject to internal qualification. Details regarding test methods and conditions are referenced in Table 4, Performance and Reliability.


## Environmental Compliance

Lead (Pb)-Free, RoHS, and REACH compliant without exemptions.

# Preliminary Data Sheet

Surface Mount Multilayer Ceramic Chip Capacitors (SMD MLCCs) – U2J Dielectric, 10 - 50 VDC (Commercial Grade)

## Dimensions – Millimeters (Inches)

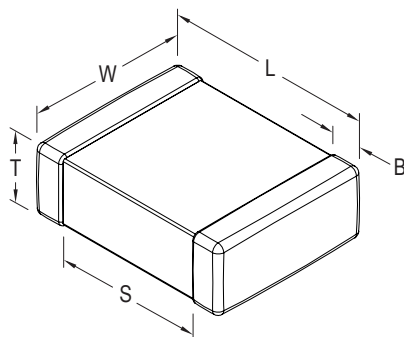

| EIA Size Code | Metric Size Code | L Length                  | W Width                    | T Thickness | B Bandwidth               | S Separation Minimum | Mounting Technique                 |
|---------------|------------------|---------------------------|----------------------------|-------------|---------------------------|----------------------|------------------------------------|
| 0402          | 1005             | 1.00 (0.040)±0.05 (0.002) | 0.50 (0.020)± 0.05 (0.002) |             | 0.30 (0.012)±0.10 (0.004) | 0.30 (0.012)         | Solder wave<br>or<br>Solder reflow |
| 0603          | 1608             | 1.60 (0.063)±0.15 (0.006) | 0.80 (0.032)±0.15 (0.006)  |             | 0.35 (0.014)±0.15 (0.006) | 0.70 (0.028)         |                                    |
| 0805          | 2012             | 2.00 (0.079)±0.20 (0.008) | 1.25 (0.049)±0.20 (0.008)  |             | 0.50 (0.02)±0.25 (0.010)  | 0.75 (0.030)         |                                    |
| 1206          | 3216             | 3.20 (0.126)±0.20 (0.008) | 1.60 (0.063)±0.20 (0.008)  |             | 0.50 (0.02)±0.25 (0.010)  | N/A                  | Solder reflow only                 |
| 1210          | 3225             | 3.20 (0.126)±0.20 (0.008) | 2.50 (0.098)±0.20 (0.008)  |             | 0.50 (0.02)±0.25 (0.010)  |                      |                                    |
| 1812          | 4532             | 4.50 (0.177)±0.30 (0.012) | 3.20 (0.126)±0.30 (0.012)  |             | 0.60 (0.024)±0.35 (0.014) |                      |                                    |

# Preliminary Data Sheet

## Electrical Parameters/Characteristics

| Item                                                               | Parameters/Characteristics                                                               |
|--------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Operating Temperature Range                                        | -55°C to +125°C                                                                          |
| Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC) | -750 ±12030 ppm/°C                                                                       |
| Aging Rate (Maximum % Capacitance Loss/Decade Hour)                | 0.1%                                                                                     |
| Dielectric Withstanding Voltage (DWV)                              | 250% of rated voltage<br>(5 ±1 seconds and charge/discharge not exceeding 50 mA)         |
| Dissipation Factor (DF) Maximum Limit at 25°C                      | 0.1%                                                                                     |
| Insulation Resistance (IR) Limit at 25°C                           | 1,000 megohm microfarads or 100 GΩ<br>(Rated voltage applied for 120 ±5 seconds at 25°C) |

To obtain IR limit, divide  $M\Omega \cdot \mu F$  value by the capacitance and compare to  $G\Omega$  limit. Select the lower of the two limits.

Capacitance and dissipation factor (DF) measured under the following conditions:

1 MHz ±100 kHz and 1.0 Vrms ±0.2 V if capacitance ≤ 1,000 pF

1 kHz ±50 Hz and 1.0 Vrms ±0.2 V if capacitance > 1,000 pF

Note: When measuring capacitance it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

## Post Environmental Limits

| High Temperature Life, Biased Humidity, Moisture Resistance |                  |                   |                                |                   |                       |
|-------------------------------------------------------------|------------------|-------------------|--------------------------------|-------------------|-----------------------|
| Dielectric                                                  | Rated DC Voltage | Capacitance Value | Dissipation Factor (Maximum %) | Capacitance Shift | Insulation Resistance |
| U2J                                                         | All              | All               | 0.5                            | 0.3% or ±0.25 pF  | 10% of Initial Limit  |

# Preliminary Data Sheet

Surface Mount Multilayer Ceramic Chip Capacitors (SMD MLCs) – U2J Dielectric, 10 - 50 VDC (Commercial Grade)

**Table 1A – Capacitance Range/Selection Waterfall (0402 – 1812 Case Sizes)**

| Capacitance | Cap Code | Case Size/<br>Series  |   |   |   |   |   | C0402C                                                                                     |    |    |    | C0603C |    |    |    | C0805C |    |    |    | C1206C |    |    |    | C1210C |    |    |    | C1812C |    |    |    |
|-------------|----------|-----------------------|---|---|---|---|---|--------------------------------------------------------------------------------------------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|
|             |          | Voltage Code          |   |   |   |   |   | 8                                                                                          | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  |        |    |    |    |
|             |          | Rated Voltage (VDC)   |   |   |   |   |   | 10                                                                                         | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 |        |    |    |    |
|             |          | Capacitance Tolerance |   |   |   |   |   | Product Availability and Chip Thickness Codes<br>See Table 2 for Chip Thickness Dimensions |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 100 pF      | 101      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 110 pF      | 111      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 120 pF      | 121      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 130 pF      | 131      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 150 pF      | 151      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 160 pF      | 161      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 180 pF      | 181      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 200 pF      | 201      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 220 pF      | 221      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 240 pF      | 241      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 270 pF      | 271      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 300 pF      | 301      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 330 pF      | 331      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 360 pF      | 361      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 390 pF      | 391      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 430 pF      | 431      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 470 pF      | 471      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 510 pF      | 511      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 560 pF      | 561      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 620 pF      | 621      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 680 pF      | 681      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 750 pF      | 751      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 820 pF      | 821      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 910 pF      | 911      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,000 pF    | 102      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,100 pF    | 112      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,200 pF    | 122      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,300 pF    | 132      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,500 pF    | 152      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,600 pF    | 162      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 1,800 pF    | 182      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 2,000 pF    | 202      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 2,200 pF    | 222      |                       | F | G | J | K | M | BB                                                                                         | BB | BB | BB | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 2,400 pF    | 242      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 2,700 pF    | 272      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 3,000 pF    | 302      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 3,300 pF    | 332      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 3,600 pF    | 362      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 3,900 pF    | 392      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 4,300 pF    | 432      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 4,700 pF    | 472      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 5,100 pF    | 512      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 5,600 pF    | 562      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 6,200 pF    | 622      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 6,800 pF    | 682      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 7,500 pF    | 752      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 8,200 pF    | 822      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 9,100 pF    | 912      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN |        |    |    |    |        |    |    |    |        |    |    |    |
| 10,000 pF   | 103      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 12,000 pF   | 123      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 15,000 pF   | 153      |                       | F | G | J | K | M |                                                                                            |    |    |    | CF     | CF | CF | CF | DN     | DN | DN | DN | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| Capacitance | Cap Code | Rated Voltage (VDC)   |   |   |   |   |   | 10                                                                                         | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 |
|             |          | Voltage Code          |   |   |   |   |   | 8                                                                                          | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  |
|             |          | Case Size/Series      |   |   |   |   |   | C0402C                                                                                     |    |    |    | C0603C |    |    |    | C0805C |    |    |    | C1206C |    |    |    | C1210C |    |    |    | C1812C |    |    |    |

# Preliminary Data Sheet

Surface Mount Multilayer Ceramic Chip Capacitors (SMD MLCCs) – U2J Dielectric, 10 - 50 VDC (Commercial Grade)

**Table 1A – Capacitance Range/Selection Waterfall (0402 – 1812 Case Sizes) cont'd**

| Capacitance | Cap Code | Case Size/<br>Series     | C0402C                                                                                     |    |    |    | C0603C |    |    |    | C0805C |    |    |    | C1206C |    |    |    | C1210C |    |    |    | C1812C |    |    |    |
|-------------|----------|--------------------------|--------------------------------------------------------------------------------------------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|--------|----|----|----|
|             |          | Voltage Code             | 8                                                                                          | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  |
|             |          | Rated Voltage (VDC)      | 10                                                                                         | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 |
|             |          | Capacitance<br>Tolerance | Product Availability and Chip Thickness Codes<br>See Table 2 for Chip Thickness Dimensions |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |
| 18,000 pF   | 183      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DN     | DN | DN | DN | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 22,000 pF   | 223      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DN     | DN | DN | DP | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 27,000 pF   | 273      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DP     | DP | DP | DP | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 33,000 pF   | 333      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DP     | DP | DP | DG | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 47,000 pF   | 393      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DG     | DG | DG | DG | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 47,000 pF   | 473      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DG     | DG | DG | DG | EB     | EB | EB | EB | FB     | FB | FB | FB | GB     | GB | GB |    |
| 56,000 pF   | 563      | F G J K M                |                                                                                            |    |    |    |        |    |    |    | DG     | DG | DG |    | EB     | EB | EB | EC | FB     | FB | FB | FB | GB     | GB | GB |    |
| 68,000 pF   | 683      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EC     | EC | EC | EC | FB     | FB | FB | FB | GB     | GB | GB |    |
| 82,000 pF   | 823      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EC     | EC | EC | EE | FB     | FB | FB | FB | GB     | GB | GB |    |
| 100,000 pF  | 104      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EC     | EC | EC | EF | FB     | FB | FB | FC | GB     | GB | GB |    |
| 120,000 pF  | 124      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EF     | EF | EF | EH | FC     | FC | FC | FE | GB     | GB | GB |    |
| 150,000 pF  | 154      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EF     | EF | EF | EH | FE     | FE | FE | FG | GB     | GB | GB |    |
| 180,000 pF  | 184      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EH     | EH | EH |    | FG     | FG | FG | FG | GB     | GB | GB |    |
| 220,000 pF  | 224      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    | EH     | EH | EH |    | FG     | FG | FG | FH | GB     | GB | GB |    |
| 270,000 pF  | 274      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    | FH     | FH | FH | FM | GB     | GB | GB |    |
| 330,000 pF  | 334      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    | FM     | FM | FM |    | GC     | GC | GC |    |
| 390,000 pF  | 394      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    | GH     | GH | GH |    |
| 470,000 pF  | 474      | F G J K M                |                                                                                            |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    |        |    |    |    | GK     | GK | GK |    |
| Capacitance | Cap Code | Rated Voltage (VDC)      | 10                                                                                         | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 | 10     | 16 | 25 | 50 |
|             |          | Voltage Code             | 8                                                                                          | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  | 8      | 4  | 3  | 5  |
|             |          | Case Size/Series         | C0402C                                                                                     |    |    |    | C0603C |    |    |    | C0805C |    |    |    | C1206C |    |    |    | C1210C |    |    |    | C1812C |    |    |    |

# Preliminary Data Sheet

**Table 2A – Chip Thickness/Tape & Reel Packaging Quantities**

| Thickness Code | Case Size <sup>1</sup> | Thickness ± Range (mm) | Paper Quantity <sup>1</sup> |          | Plastic Quantity |          |
|----------------|------------------------|------------------------|-----------------------------|----------|------------------|----------|
|                |                        |                        | 7" Reel                     | 13" Reel | 7" Reel          | 13" Reel |
| BB             | 0402                   | 0.50 ± 0.05            | 10,000                      | 50,000   | 0                | 0        |
| BD             | 0402                   | 0.55 ± 0.05            | 10,000                      | 50,000   | 0                | 0        |
| CF             | 0603                   | 0.80 ± 0.07            | 4,000                       | 15,000   | 0                | 0        |
| CH             | 0603                   | 0.85 ± 0.07            | 4,000                       | 10,000   | 0                | 0        |
| DM             | 0805                   | 0.70 ± 0.20            | 4,000                       | 15,000   | 0                | 0        |
| DN             | 0805                   | 0.78 ± 0.10            | 4,000                       | 15,000   | 0                | 0        |
| DP             | 0805                   | 0.90 ± 0.10            | 4,000                       | 15,000   | 0                | 0        |
| DE             | 0805                   | 1.00 ± 0.10            | 0                           | 0        | 2,500            | 10,000   |
| DF             | 0805                   | 1.10 ± 0.10            | 0                           | 0        | 2,500            | 10,000   |
| DG             | 0805                   | 1.25 ± 0.15            | 0                           | 0        | 2,500            | 10,000   |
| EB             | 1206                   | 0.78 ± 0.10            | 4,000                       | 10,000   | 4,000            | 10,000   |
| EC             | 1206                   | 0.90 ± 0.10            | 0                           | 0        | 4,000            | 10,000   |
| ED             | 1206                   | 1.00 ± 0.10            | 0                           | 0        | 2,500            | 10,000   |
| EE             | 1206                   | 1.10 ± 0.10            | 0                           | 0        | 2,500            | 10,000   |
| EF             | 1206                   | 1.20 ± 0.15            | 0                           | 0        | 2,500            | 10,000   |
| EH             | 1206                   | 1.60 ± 0.20            | 0                           | 0        | 2,000            | 8,000    |
| FB             | 1210                   | 0.78 ± 0.10            | 0                           | 0        | 4,000            | 10,000   |
| FC             | 1210                   | 0.90 ± 0.10            | 0                           | 0        | 4,000            | 10,000   |
| FE             | 1210                   | 1.00 ± 0.10            | 0                           | 0        | 2,500            | 10,000   |
| FF             | 1210                   | 1.10 ± 0.10            | 0                           | 0        | 2,500            | 10,000   |
| FG             | 1210                   | 1.25 ± 0.15            | 0                           | 0        | 2,500            | 10,000   |
| FH             | 1210                   | 1.55 ± 0.15            | 0                           | 0        | 2,000            | 8,000    |
| FM             | 1210                   | 1.70 ± 0.20            | 0                           | 0        | 2,000            | 8,000    |
| FJ             | 1210                   | 1.85 ± 0.20            | 0                           | 0        | 2,000            | 8,000    |
| FK             | 1210                   | 2.10 ± 0.20            | 0                           | 0        | 2,000            | 8,000    |
| GB             | 1812                   | 1.00 ± 0.10            | 0                           | 0        | 1,000            | 4,000    |
| GD             | 1812                   | 1.25 ± 0.15            | 0                           | 0        | 1,000            | 4,000    |
| GH             | 1812                   | 1.40 ± 0.15            | 0                           | 0        | 1,000            | 4,000    |
| GG             | 1812                   | 1.55 ± 0.10            | 0                           | 0        | 1,000            | 4,000    |
| GK             | 1812                   | 1.60 ± 0.20            | 0                           | 0        | 1,000            | 4,000    |
| GJ             | 1812                   | 1.70 ± 0.15            | 0                           | 0        | 1,000            | 4,000    |
| GN             | 1812                   | 1.70 ± 0.20            | 0                           | 0        | 1,000            | 4,000    |
| GM             | 1812                   | 2.00 ± 0.20            | 0                           | 0        | 500              | 2,000    |
| Thickness Code | Case Size <sup>1</sup> | Thickness ± Range (mm) | 7" Reel                     | 13" Reel | 7" Reel          | 13" Reel |
|                |                        |                        | Paper Quantity <sup>1</sup> |          | Plastic Quantity |          |

Package quantity based on finished chip thickness specifications.

<sup>1</sup> If ordering using the 2 mm Tape and Reel pitch option, the packaging quantity outlined in the table above will be doubled. This option is limited to EIA 0603 (1608 metric) case size devices. For more information regarding 2 mm pitch option see "Tape & Reel Packaging Information".

# Preliminary Data Sheet

**Table 2B – Bulk Packaging Quantities**

| Packaging Type                |             | Loose Packaging                              |         |
|-------------------------------|-------------|----------------------------------------------|---------|
|                               |             | Bulk Bag (default)                           |         |
| Packaging C-Spec <sup>1</sup> |             | N/A <sup>2</sup>                             |         |
| Case Size                     |             | Packaging Quantities (pieces/unit packaging) |         |
| EIA (in)                      | Metric (mm) | Minimum                                      | Maximum |
| 0402                          | 1005        | 1                                            | 50,000  |
| 0603                          | 1608        |                                              |         |
| 0805                          | 2012        |                                              |         |
| 1206                          | 3216        |                                              |         |
| 1210                          | 3225        |                                              |         |
| 1812                          | 4532        |                                              | 20,000  |

<sup>1</sup> The "Packaging C-Spec" is a 4 to 8 digit code which identifies the packaging type and/or product grade. When ordering, the proper code must be included in the 15th through 22nd character positions of the ordering code. See "Ordering Information" section of this document for further details. Commercial Grade product ordered without a packaging C-Spec will default to our standard "Bulk Bag" packaging. Contact KEMET if you require a bulk bag packaging option for Automotive Grade products.

<sup>2</sup> A packaging C-Spec (see note 1 above) is not required for "Bulk Bag" packaging (excluding Anti-Static Bulk Bag and Automotive Grade products). The 15th through 22nd character positions of the ordering code should be left blank. All product ordered without a packaging C-Spec will default to our standard "Bulk Bag" packaging.

# Preliminary Data Sheet

**Table 3 – Chip Capacitor Land Pattern Design Recommendations per IPC–7351**

| EIA Size Code | Metric Size Code | Density Level A: Maximum (Most) Land Protrusion (mm) |      |      |      |      | Density Level B: Median (Nominal) Land Protrusion (mm) |      |      |      |      | Density Level C: Minimum (Least) Land Protrusion (mm) |      |      |      |      |
|---------------|------------------|------------------------------------------------------|------|------|------|------|--------------------------------------------------------|------|------|------|------|-------------------------------------------------------|------|------|------|------|
|               |                  | C                                                    | Y    | X    | V1   | V2   | C                                                      | Y    | X    | V1   | V2   | C                                                     | Y    | X    | V1   | V2   |
| 0402          | 1005             | 0.50                                                 | 0.72 | 0.72 | 2.20 | 1.20 | 0.45                                                   | 0.62 | 0.62 | 1.90 | 1.00 | 0.40                                                  | 0.52 | 0.52 | 1.60 | 0.80 |
| 0603          | 1608             | 0.90                                                 | 1.15 | 1.10 | 4.00 | 2.10 | 0.80                                                   | 0.95 | 1.00 | 3.10 | 1.50 | 0.60                                                  | 0.75 | 0.90 | 2.40 | 1.20 |
| 0805          | 2012             | 1.00                                                 | 1.35 | 1.55 | 4.40 | 2.60 | 0.90                                                   | 1.15 | 1.45 | 3.50 | 2.00 | 0.75                                                  | 0.95 | 1.35 | 2.80 | 1.70 |
| 1206          | 3216             | 1.60                                                 | 1.35 | 1.90 | 5.60 | 2.90 | 1.50                                                   | 1.15 | 1.80 | 4.70 | 2.30 | 1.40                                                  | 0.95 | 1.70 | 4.00 | 2.00 |
| 1210          | 3225             | 1.60                                                 | 1.35 | 2.80 | 5.65 | 3.80 | 1.50                                                   | 1.15 | 2.70 | 4.70 | 3.20 | 1.40                                                  | 0.95 | 2.60 | 4.00 | 2.90 |
| 12101         | 3225             | 1.50                                                 | 1.60 | 2.90 | 5.60 | 3.90 | 1.40                                                   | 1.40 | 2.80 | 4.70 | 3.30 | 1.30                                                  | 1.20 | 2.70 | 4.00 | 3.00 |
| 1812          | 4532             | 2.15                                                 | 1.60 | 3.60 | 6.90 | 4.60 | 2.05                                                   | 1.40 | 3.50 | 6.00 | 4.00 | 1.95                                                  | 1.20 | 3.40 | 5.30 | 3.70 |


<sup>1</sup> Only for capacitance values  $\geq 22 \mu\text{F}$

**Density Level A:** For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes. KEMET only recommends wave soldering of EIA 0603, 0805 and 1206 case sizes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes.

**Density Level C:** For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC Standard 7351 (IPC–7351).

Image below based on Density Level B for an EIA 1210 case size.

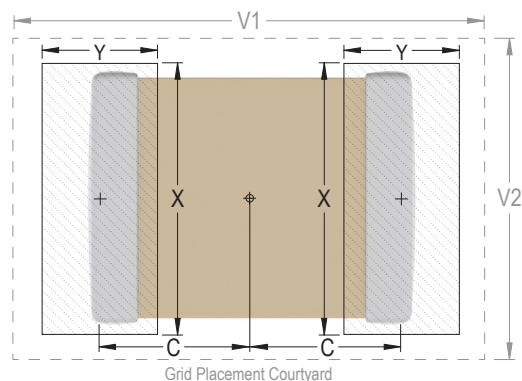

# Preliminary Data Sheet

## Soldering Process


### Recommended Soldering Technique:

- Solder wave or solder reflow for EIA case sizes 0603, 0805 and 1206
- All other EIA case sizes are limited to solder reflow only

### Recommended Reflow Soldering Profile:

KEMET's families of surface mount multilayer ceramic capacitors (SMD MLCCs) are compatible with wave (single or dual), convection, IR or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020 standard for moisture sensitivity testing. These devices can safely withstand a maximum of three reflow passes at these conditions.

| Profile Feature                                       | Termination Finish |                    |
|-------------------------------------------------------|--------------------|--------------------|
|                                                       | SnPb               | 100% Matte Sn      |
| <b>Preheat/Soak</b>                                   |                    |                    |
| Temperature Minimum ( $T_{Smin}$ )                    | 100°C              | 150°C              |
| Temperature Maximum ( $T_{Smax}$ )                    | 150°C              | 200°C              |
| Time ( $t_s$ ) from $T_{Smin}$ to $T_{Smax}$          | 60 – 120 seconds   | 60 – 120 seconds   |
| Ramp-Up Rate ( $T_L$ to $T_P$ )                       | 3°C/second maximum | 3°C/second maximum |
| Liquidous Temperature ( $T_L$ )                       | 183°C              | 217°C              |
| Time Above Liquidous ( $t_L$ )                        | 60 – 150 seconds   | 60 – 150 seconds   |
| Peak Temperature ( $T_P$ )                            | 235°C              | 260°C              |
| Time Within 5°C of Maximum Peak Temperature ( $t_p$ ) | 20 seconds maximum | 30 seconds maximum |
| Ramp-Down Rate ( $T_P$ to $T_L$ )                     | 6°C/second maximum | 6°C/second maximum |
| Time 25°C to Peak Temperature                         | 6 minutes maximum  | 8 minutes maximum  |

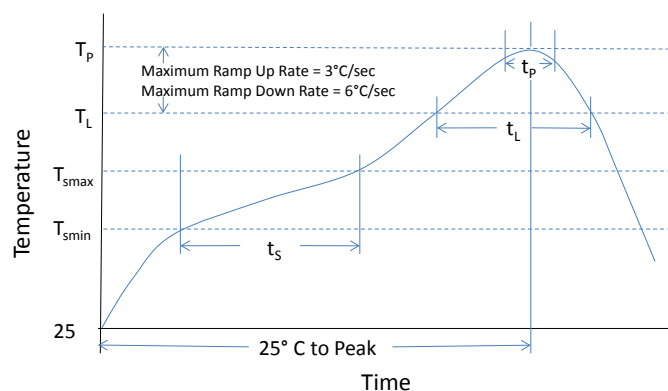

Note 1: All temperatures refer to the center of the package, measured on the capacitor body surface that is facing up during assembly reflow.

# Preliminary Data Sheet

**Table 4 – Performance & Reliability: Test Methods and Conditions**


| Stress                 | Reference                       | Test or Inspection Method                                                                                                                                                                                                                            |                        |                |
|------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------|
| Terminal Strength      | JIS-C-6429                      | Appendix 1, Note:                                                                                                                                                                                                                                    | Package Size (L" x W") | Force          |
|                        |                                 |                                                                                                                                                                                                                                                      | 0402                   | 5 N (0.51 kg)  |
|                        |                                 |                                                                                                                                                                                                                                                      | 0603                   | 10 N (1.02 kg) |
|                        |                                 |                                                                                                                                                                                                                                                      | ≥ 0805                 | 18 N (1.83 kg) |
| Board Flex             | JIS-C-6429                      | Appendix 2, Note: 3.0 mm (minimum).                                                                                                                                                                                                                  |                        |                |
| Solderability          | J-STD-002                       | Magnification 50 X Conditions:                                                                                                                                                                                                                       |                        |                |
|                        |                                 | a) Method B, 4 hours at 155°C, dry heat at 235°C                                                                                                                                                                                                     |                        |                |
|                        |                                 | b) Method B at 215°C category 3                                                                                                                                                                                                                      |                        |                |
|                        |                                 | c) Method D, category 3 at 260°C                                                                                                                                                                                                                     |                        |                |
| Temperature Cycling    | JESD22 Method JA-104            | 1,000 cycles (-55°C to +125°C). Measurement at 24 hours +/- 4 hours after test conclusion.                                                                                                                                                           |                        |                |
| Biased Humidity        | MIL-STD-202 Method 103          | Load Humidity: 1,000 hours 85°C/85% RH and rated voltage. Add 100 K ohm resistor. Measurement at 24 hours +/- 4 hours after test conclusion.                                                                                                         |                        |                |
|                        |                                 | Low Volt Humidity: 1,000 hours 85°C/85% RH and 1.5 V. Add 100 K ohm resistor. Measurement at 24 hours +/- 4 hours after test conclusion.                                                                                                             |                        |                |
| Moisture Resistance    | MIL-STD-202 Method 106          | t = 24 hours/cycle. Steps 7a & 7b not required. Measurement at 24 hrs. +/- 4 hours after test conclusion.                                                                                                                                            |                        |                |
| Thermal Shock          | MIL-STD-202 Method 107          | -55°C/+125°C. Note: Number of cycles required – 300. Maximum transfer time – 20 seconds. Dwell time – 15 minutes. Air – Air.                                                                                                                         |                        |                |
| High Temperature Life  | MIL-STD-202 Method 108/EIA -198 | 1,000 hours at 125°C with 2 X rated voltage applied.                                                                                                                                                                                                 |                        |                |
| Storage Life           | MIL-STD-202 Method 108          | 125°C, 0 VDC for 1,000 hours.                                                                                                                                                                                                                        |                        |                |
| Vibration              | MIL-STD-202 Method 204          | 5 G's for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8" X 5" PCB 0.031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10 – 2,000 Hz |                        |                |
| Mechanical Shock       | MIL-STD-202 Method 213          | Figure 1 of Method 213, Condition F.                                                                                                                                                                                                                 |                        |                |
| Resistance to Solvents | MIL-STD-202 Method 215          | Add aqueous wash chemical, OKEM clean or equivalent.                                                                                                                                                                                                 |                        |                |

## Storage and Handling

Ceramic chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature– reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulfur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within 1.5 years of receipt.

# Preliminary Data Sheet

## Construction

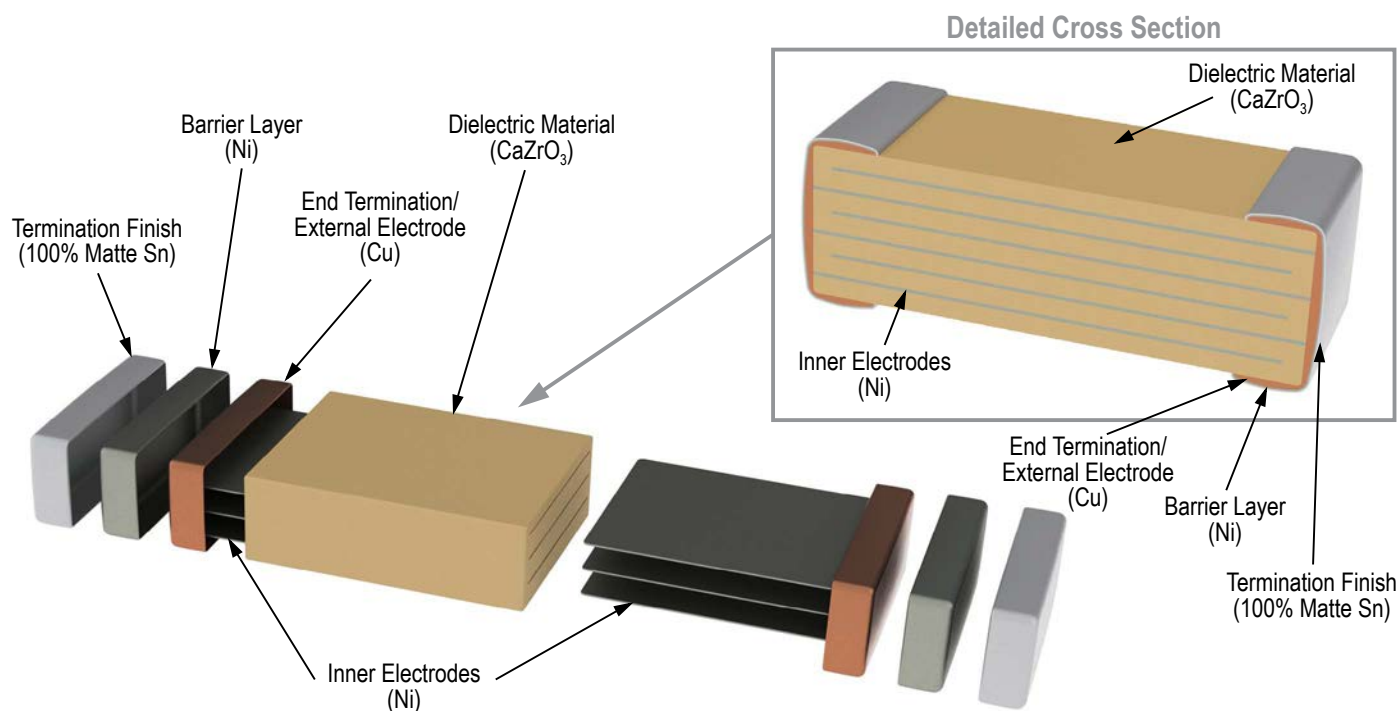

## Capacitor Marking (Optional):

Laser marking option is not available on:


- C0G, Ultra Stable X8R and Y5V dielectric devices
- EIA 0402 case size devices
- EIA 0603 case size devices with Flexible Termination option.
- KPS Commercial and Automotive grade stacked devices.

These capacitors are supplied unmarked only.

# Preliminary Data Sheet

## Tape & Reel Packaging Information

KEMET offers multilayer ceramic chip capacitors packaged in 8, 12 and 16 mm tape on 7" and 13" reels in accordance with EIA Standard 481. This packaging system is compatible with all tape-fed automatic pick and place systems. See Table 2 for details on reeling quantities for commercial chips.

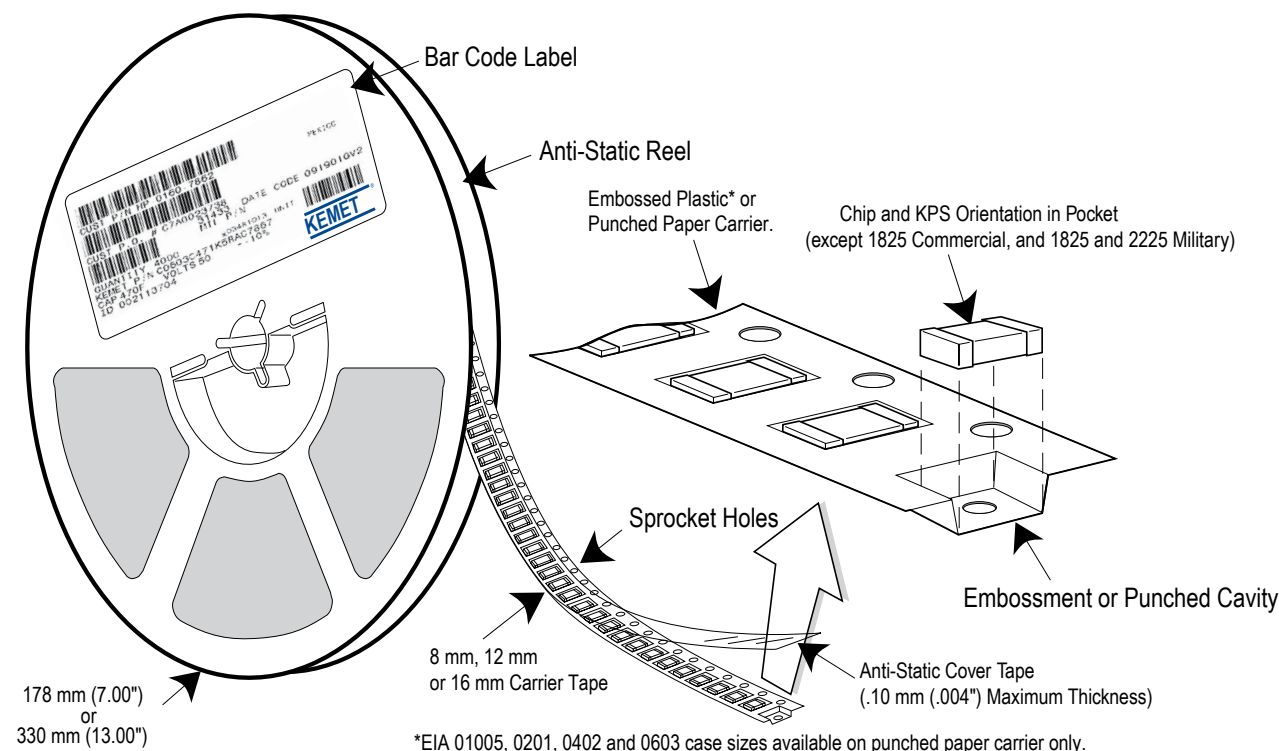

**Table 5 – Carrier Tape Configuration, Embossed Plastic & Punched Paper (mm)**

| EIA Case Size     | Tape Size (W)* | Embossed Plastic         |          | Punched Paper            |          |
|-------------------|----------------|--------------------------|----------|--------------------------|----------|
|                   |                | 7" Reel                  | 13" Reel | 7" Reel                  | 13" Reel |
|                   |                | Pitch (P <sub>1</sub> )* |          | Pitch (P <sub>1</sub> )* |          |
| 01005 – 0402      | 8              |                          |          | 2                        | 2        |
| 0603              | 8              |                          |          | 2/4                      | 2/4      |
| 0805              | 8              | 4                        | 4        | 4                        | 4        |
| 1206 – 1210       | 8              | 4                        | 4        | 4                        | 4        |
| 1805 – 1808       | 12             | 4                        | 4        |                          |          |
| ≥ 1812            | 12             | 8                        | 8        |                          |          |
| KPS 1210          | 12             | 8                        | 8        |                          |          |
| KPS 1812 & 2220   | 16             | 12                       | 12       |                          |          |
| Array 0508 & 0612 | 8              | 4                        | 4        |                          |          |

### New 2 mm Pitch Reel Options\*

| Packaging Ordering Code (C-Spec) | Packaging Type/Options             |
|----------------------------------|------------------------------------|
| C-3190                           | Automotive grade 7" reel unmarked  |
| C-3191                           | Automotive grade 13" reel unmarked |
| C-7081                           | Commercial grade 7" reel unmarked  |
| C-7082                           | Commercial grade 13" reel unmarked |

\* 2 mm pitch reel only available for 0603 EIA case size.

2 mm pitch reel for 0805 EIA case size under development.

### Benefits of Changing from 4 mm to 2 mm Pitching Spacing


- Lower placement costs
- Double the parts on each reel results in fewer reel changes and increased efficiency
- Fewer reels result in lower packaging, shipping and storage costs, reducing waste

\*Refer to Figures 1 & 2 for W and P<sub>1</sub> carrier tape reference locations.

\*Refer to Tables 6 & 7 for tolerance specifications.

# Preliminary Data Sheet

**Figure 1 – Embossed (Plastic) Carrier Tape Dimensions**

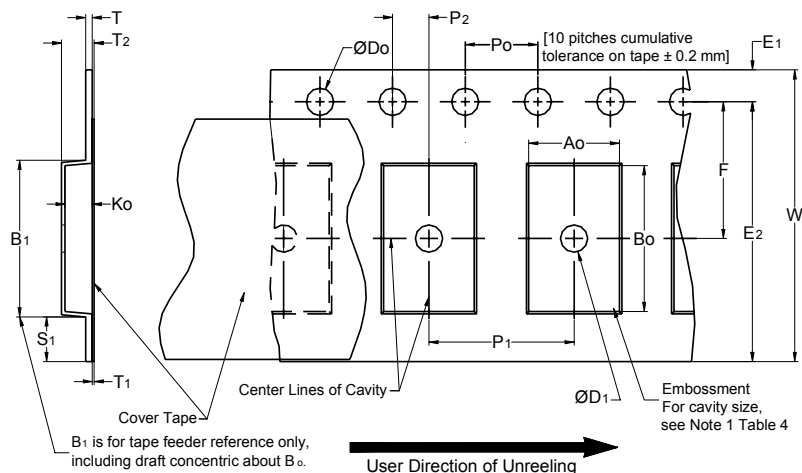

**Table 6 – Embossed (Plastic) Carrier Tape Dimensions**


Metric will govern

| Constant Dimensions — Millimeters (Inches) |                                       |                                  |                              |                             |                              |                           |                                  |                                                  |                           |
|--------------------------------------------|---------------------------------------|----------------------------------|------------------------------|-----------------------------|------------------------------|---------------------------|----------------------------------|--------------------------------------------------|---------------------------|
| Tape Size                                  | D <sub>0</sub>                        | D <sub>1</sub> Minimum<br>Note 1 | E <sub>1</sub>               | P <sub>0</sub>              | P <sub>2</sub>               | R Reference<br>Note 2     | S <sub>1</sub> Minimum<br>Note 3 | T<br>Maximum                                     | T <sub>1</sub><br>Maximum |
| 8 mm                                       | 1.5 +0.10/-0.0<br>(0.059 +0.004/-0.0) | 1.0<br>(0.039)                   | 1.75 ±0.10<br>(0.069 ±0.004) | 4.0 ±0.10<br>(0.157 ±0.004) | 2.0 ±0.05<br>(0.079 ±0.002)  | 25.0<br>(0.984)           | 0.600<br>(0.024)                 | 0.600<br>(0.024)                                 | 0.100<br>(0.004)          |
| 12 mm                                      |                                       | 1.5<br>(0.059)                   |                              |                             |                              | 30<br>(1.181)             |                                  |                                                  |                           |
| 16 mm                                      |                                       |                                  |                              |                             |                              |                           |                                  |                                                  |                           |
| Variable Dimensions — Millimeters (Inches) |                                       |                                  |                              |                             |                              |                           |                                  |                                                  |                           |
| Tape Size                                  | Pitch                                 | B <sub>1</sub> Maximum<br>Note 4 | E <sub>2</sub><br>Minimum    | F                           | P <sub>1</sub>               | T <sub>2</sub><br>Maximum | W<br>Maximum                     | A <sub>0</sub> , B <sub>0</sub> & K <sub>0</sub> |                           |
| 8 mm                                       | Single (4 mm)                         | 4.35<br>(0.171)                  | 6.25<br>(0.246)              | 3.5 ±0.05<br>(0.138 ±0.002) | 4.0 ±0.10<br>(0.157 ±0.004)  | 2.5<br>(0.098)            | 8.3<br>(0.327)                   | Note 5                                           |                           |
| 12 mm                                      | Single (4 mm) &<br>Double (8 mm)      | 8.2<br>(0.323)                   | 10.25<br>(0.404)             | 5.5 ±0.05<br>(0.217 ±0.002) | 8.0 ±0.10<br>(0.315 ±0.004)  | 4.6<br>(0.181)            | 12.3<br>(0.484)                  |                                                  |                           |
| 16 mm                                      | Triple (12 mm)                        | 12.1<br>(0.476)                  | 14.25<br>(0.561)             | 7.5 ±0.05<br>(0.138 ±0.002) | 12.0 ±0.10<br>(0.157 ±0.004) | 4.6<br>(0.181)            | 16.3<br>(0.642)                  |                                                  |                           |

1. The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of embossment location and hole location shall be applied independent of each other.
2. The tape with or without components shall pass around R without damage (see Figure 6).
3. If S<sub>1</sub> < 1.0 mm, there may not be enough area for cover tape to be properly applied (see EIA Standard 481 paragraph 4.3 section b).
4. B<sub>1</sub> dimension is a reference dimension for tape feeder clearance only.
5. The cavity defined by A<sub>0</sub>, B<sub>0</sub> and K<sub>0</sub> shall surround the component with sufficient clearance that:
  - (a) the component does not protrude above the top surface of the carrier tape.
  - (b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - (c) rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm tapes (see Figure 3).
  - (d) lateral movement of the component is restricted to 0.5 mm maximum for 8 and 12 mm wide tape and to 1.0 mm maximum for 16 mm tape (see Figure 4).
  - (e) for KPS Series product, A<sub>0</sub> and B<sub>0</sub> are measured on a plane 0.3 mm above the bottom of the pocket.
  - (f) see Addendum in EIA Standard 481 for standards relating to more precise taping requirements.

# Preliminary Data Sheet

**Figure 2 – Punched (Paper) Carrier Tape Dimensions**

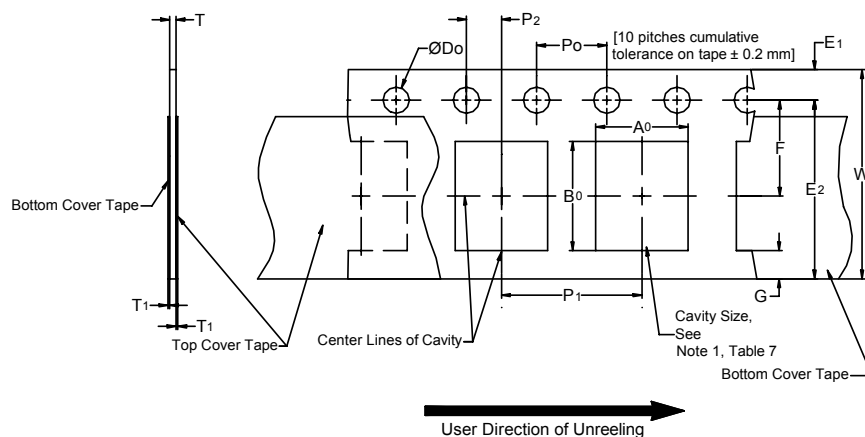

**Table 7 – Punched (Paper) Carrier Tape Dimensions**

Metric will govern

| Constant Dimensions — Millimeters (Inches) |                                         |                                        |                                       |                                       |                            |                 |                    |
|--------------------------------------------|-----------------------------------------|----------------------------------------|---------------------------------------|---------------------------------------|----------------------------|-----------------|--------------------|
| Tape Size                                  | $D_0$                                   | $E_1$                                  | $P_0$                                 | $P_2$                                 | $T_1$ Maximum              | G Minimum       | R Reference Note 2 |
| 8 mm                                       | $1.5 +0.10 -0.0$<br>(0.059 +0.004 -0.0) | $1.75 \pm 0.10$<br>(0.069 $\pm$ 0.004) | $4.0 \pm 0.10$<br>(0.157 $\pm$ 0.004) | $2.0 \pm 0.05$<br>(0.079 $\pm$ 0.002) | 0.10<br>(0.004)<br>Maximum | 0.75<br>(0.030) | 25<br>(0.984)      |
| Variable Dimensions — Millimeters (Inches) |                                         |                                        |                                       |                                       |                            |                 |                    |
| Tape Size                                  | Pitch                                   | E2 Minimum                             | F                                     | $P_1$                                 | T Maximum                  | W Maximum       | $A_0 B_0$          |
| 8 mm                                       | Half (2 mm)                             | 6.25<br>(0.246)                        | $3.5 \pm 0.05$<br>(0.138 $\pm$ 0.002) | $2.0 \pm 0.05$<br>(0.079 $\pm$ 0.002) | 1.1<br>(0.098)             | 8.3<br>(0.327)  | Note 1             |
| 8 mm                                       | Single (4 mm)                           |                                        |                                       | $4.0 \pm 0.10$<br>(0.157 $\pm$ 0.004) |                            | 8.3<br>(0.327)  |                    |

- The cavity defined by  $A_0$ ,  $B_0$  and  $T$  shall surround the component with sufficient clearance that:
  - the component does not protrude beyond either surface of the carrier tape.
  - the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
  - rotation of the component is limited to 20° maximum (see Figure 3).
  - lateral movement of the component is restricted to 0.5 mm maximum (see Figure 4).
  - see Addendum in EIA Standard 481 for standards relating to more precise taping requirements.
- The tape with or without components shall pass around R without damage (see Figure 6).

# Preliminary Data Sheet

## Packaging Information Performance Notes



- 1. Cover Tape Break Force:** 1.0 Kg minimum.
- 2. Cover Tape Peel Strength:** The total peel strength of the cover tape from the carrier tape shall be:

| Tape Width   | Peel Strength                    |
|--------------|----------------------------------|
| 8 mm         | 0.1 to 1.0 Newton (10 to 100 gf) |
| 12 and 16 mm | 0.1 to 1.3 Newton (10 to 130 gf) |


The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.

- 3. Labeling:** Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. Refer to EIA Standards 556 and 624.


## Figure 3 – Maximum Component Rotation

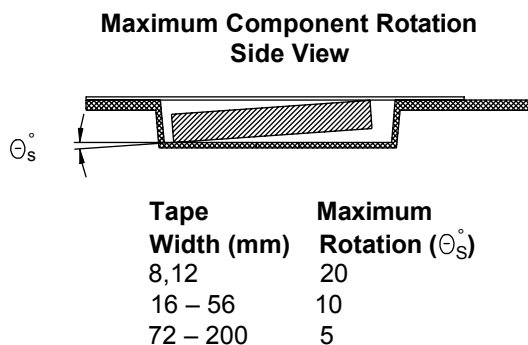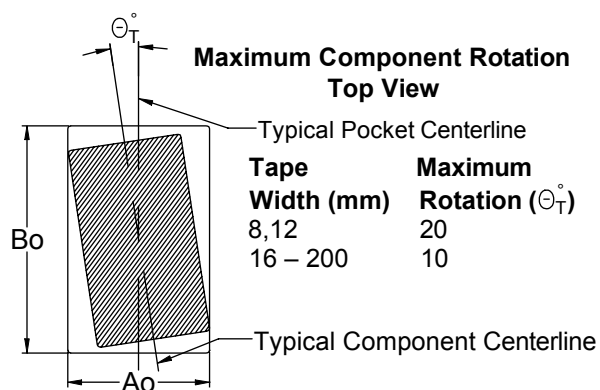

## Figure 4 – Maximum Lateral Movement

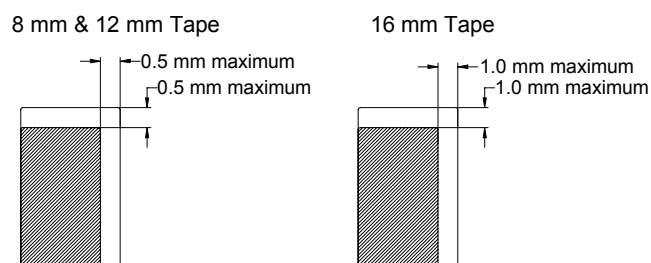


## Figure 5 – Bending Radius

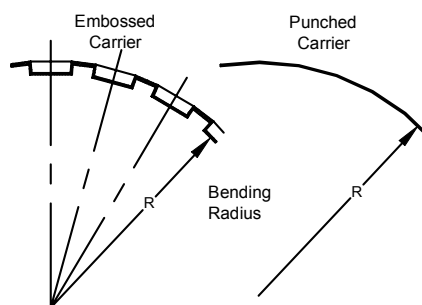

# Preliminary Data Sheet

**Figure 6 – Reel Dimensions**

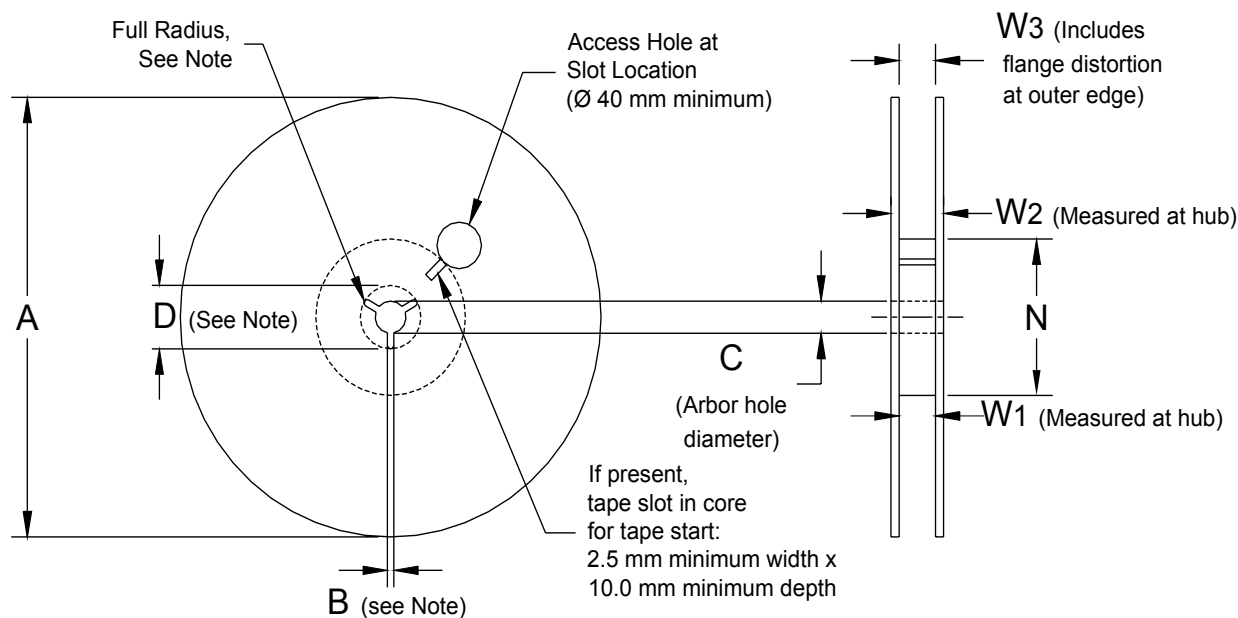

Note: Drive spokes optional; if used, dimensions B and D shall apply.


**Table 8 – Reel Dimensions**

Metric will govern


| Constant Dimensions — Millimeters (Inches) |                                                                   |                                       |                                        |                                                      |
|--------------------------------------------|-------------------------------------------------------------------|---------------------------------------|----------------------------------------|------------------------------------------------------|
| Tape Size                                  | A                                                                 | B Minimum                             | C                                      | D Minimum                                            |
| 8 mm                                       | 178 ±0.20<br>(7.008 ±0.008)<br>or<br>330 ±0.20<br>(13.000 ±0.008) | 1.5<br>(0.059)                        | 13.0 +0.5/-0.2<br>(0.521 +0.02/-0.008) | 20.2<br>(0.795)                                      |
| 12 mm                                      |                                                                   |                                       |                                        |                                                      |
| 16 mm                                      |                                                                   |                                       |                                        |                                                      |
| Variable Dimensions — Millimeters (Inches) |                                                                   |                                       |                                        |                                                      |
| Tape Size                                  | N Minimum                                                         | W <sub>1</sub>                        | W <sub>2</sub> Maximum                 | W <sub>3</sub>                                       |
| 8 mm                                       | 50<br>(1.969)                                                     | 8.4 +1.5/-0.0<br>(0.331 +0.059/-0.0)  | 14.4<br>(0.567)                        | Shall accommodate tape width<br>without interference |
| 12 mm                                      |                                                                   | 12.4 +2.0/-0.0<br>(0.488 +0.078/-0.0) | 18.4<br>(0.724)                        |                                                      |
| 16 mm                                      |                                                                   | 16.4 +2.0/-0.0<br>(0.646 +0.078/-0.0) | 22.4<br>(0.882)                        |                                                      |

# Preliminary Data Sheet

## Figure 7 – Tape Leader & Trailer Dimensions

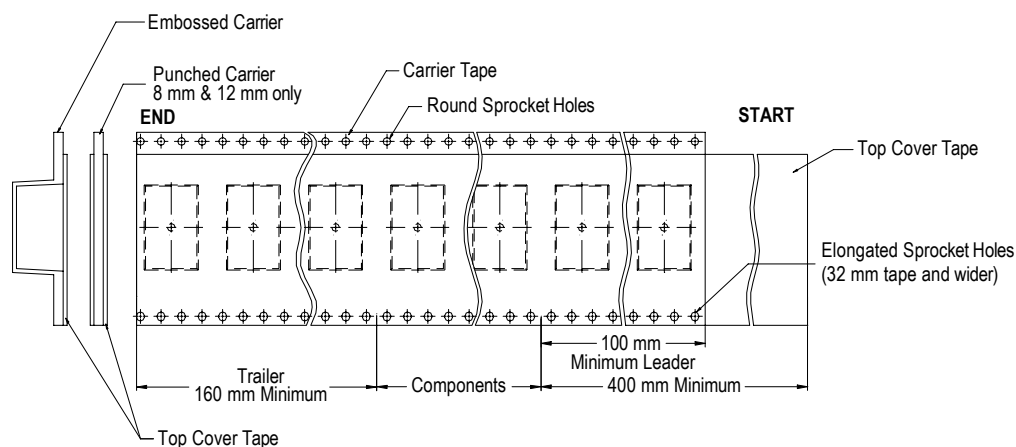

## Figure 8 – Maximum Camber

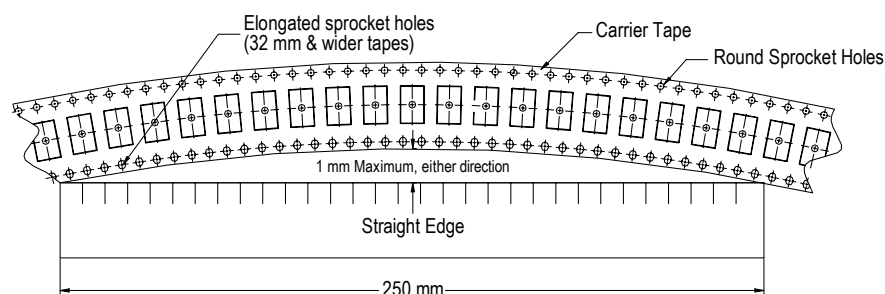

# Preliminary Data Sheet

## KEMET Corporation World Headquarters

2835 KEMET Way  
Simpsonville, SC 29681

Mailing Address:  
P.O. Box 5928  
Greenville, SC 29606

www.kemet.com  
Tel: 864-963-6300  
Fax: 864-963-6521

**Corporate Offices**  
Fort Lauderdale, FL  
Tel: 954-766-2800

## North America

### Northeast

Wilmington, MA  
Tel: 978-658-1663

### Southeast

Lake Mary, FL  
Tel: 407-855-8886

### Central

Novi, MI  
Tel: 248-994-1030

Irving, TX  
Tel: 972-915-6041

### West

Milpitas, CA  
Tel: 408-433-9950

### Mexico

Guadalajara, Jalisco  
Tel: 52-33-3123-2141

## Europe

### Southern Europe

Sasso Marconi, Italy  
Tel: 39-051-939111

Skopje, Macedonia  
Tel: 389-2-55-14-623

### Central Europe

Landsberg, Germany  
Tel: 49-8191-3350800

Kamen, Germany  
Tel: 49-2307-438110

### Northern Europe

Wyboston, United Kingdom  
Tel: 44-1480-273082

Espoo, Finland  
Tel: 358-9-5406-5000

## Asia

### Northeast Asia

Hong Kong  
Tel: 852-2305-1168

Shenzhen, China  
Tel: 86-755-2518-1306

Beijing, China  
Tel: 86-10-5877-1075

Shanghai, China  
Tel: 86-21-6447-0707

Seoul, South Korea  
Tel: 82-2-6294-0550

Taipei, Taiwan  
Tel: 886-2-27528585

### Southeast Asia

Singapore  
Tel: 65-6701-8033

Penang, Malaysia  
Tel: 60-4-6430200

Bangalore, India  
Tel: 91-806-53-76817

*Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.*

# Preliminary Data Sheet

## Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.