SUT 6.3x32 Pigtail

Axial Lead Fuse, 6.3x32 mm, low resistance, up to 30 A

new



UL 248-14 · 250 V · Time-Lag T

See below:
Approvals and Compliances

Description
- Up to 30 A, low resistance
- Ceramic Tube

Applications
- Single-phase high current applications up to 30 A

References
Packaging Details

Weblinks
pdf datasheet, html-datasheet, General Product Information, Packaging details, Distributor-Stock-Check, Detailed request for product

Technical Data

Rated Voltage	250 V
Rated current	12 - 30 A
Breaking Capacity	500 A
Characteristic	Time-Lag T
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Tube	Ceramic
Material: Endcaps	Nickel-Plated Brass
Material: Axial Leads	Tin-Plated Copper
Material: Filler	Sand
Unit Weight	3.9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	, Type, Rated current, Rated Voltage, Approvals

Soldering Methods	Wave Soldering Profile
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: SUT 6.3x32 Pigtail

Approval Logo	Certificates	Certification Body	Description
c UL us	UL Approvals	UL	UL File Number: E184831

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
UL	Designed according to	UL 248-14	Low voltage fuses - Part 14: Additional fuses
CSA Group	Designed according to	CSA22.2 No. 248.14	Low-Voltage Fuses - Part 14: Supplemental Fuses

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
IEC	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technologyequipment.


Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]

6.3 mm

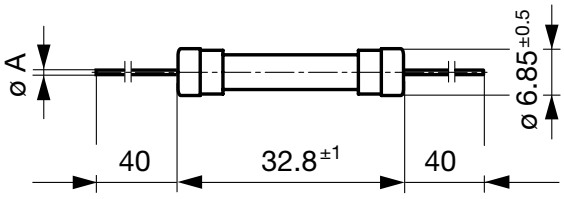


In = 12 A: ØA = 0.8 mm
In ≥ 15 A: ØA = 1.0 mm

Pre-Arcing Time

Rated Current In	1.0 x In min.	1.35 x In max.	2.0 x In min.	2.0 x In max.
12 A - 30 A	4 h	60 min	5 s	60 s

SUT 6.3x32 Pigtail

Time-Current-Curves

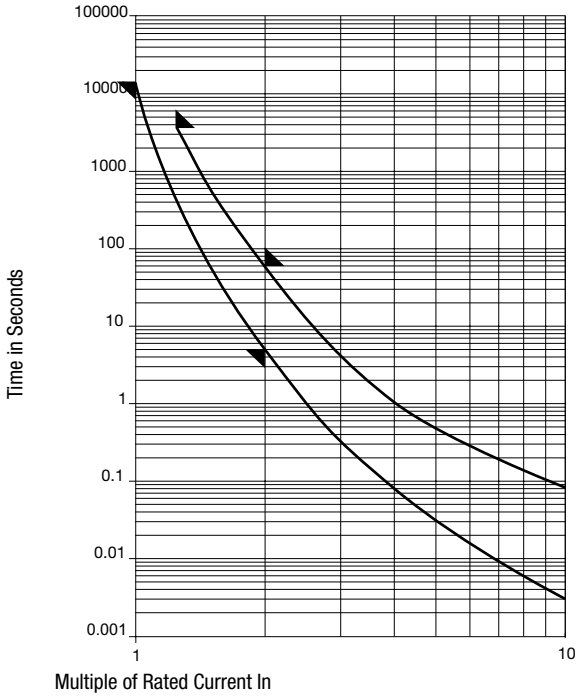

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	Cold Resistance typ. [mΩ]	Melting I²t 10.0 Intyp. [A²s]	c UL us	Order Number
12	250	1)	78	5.6	72	●	8020.0603.PT
15	250	1)	81	4.7	152	●	8020.0604.PT
20	250	1)	87	3.6	750	●	8020.0605.PT
25	250	1)	62	2.1	1010	●	8020.0606.PT
30	250	1)	64	1.8	2050	●	8020.0607.PT

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

1) 500 A @ 250 VAC, 10 kA @ 125 VAC

Packaging Unit Bulk (1000 pcs.)

26.02.2018

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.