

DASH NO.	M CODE	MADE FROM

GSD

875-116-9

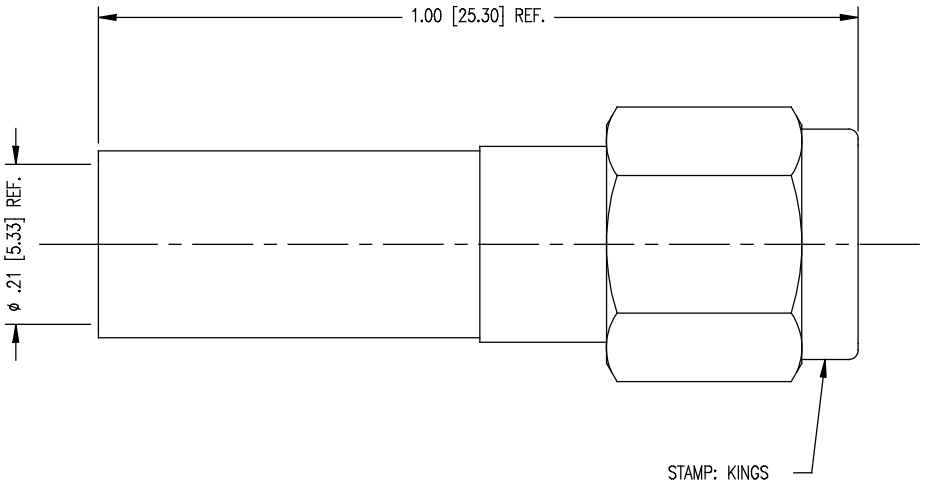

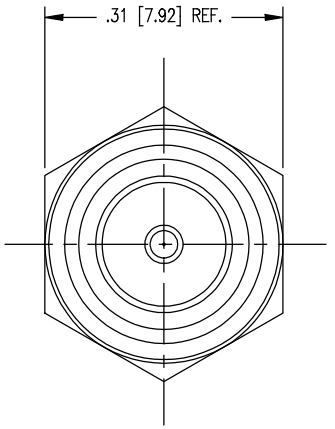

UNRELEASED

NOTES:
1. FOR USE WITH BELDEN RF 200 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-493.
3. FOR CRIMPING USE DIE KTH-2027.
4. INTERFACE PER MIL-STD-348, FIG. 310-1.
5. MARK PACKAGE: KINGS E-20422 XXXX (DATE CODE)
6. MATERIALS:
   INSULATOR-TEFLON, ASTM-D4894
   GASKET-SILICONE RUBBER, A-A-59588
   K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B140
   CENTER CONTACT-BRASS, ASTM-B16
   COUPLING NUT, STAINLESS STEEL, 303 (SAE-AMS-QQ-S-763)
   ALL OTHER METAL PARTS-BER. COP., ASTM-B196
7. FINISHES:
   CRIMP SLEEVE, KINGS TARNISH RESISTANT FINISH (TR-5)
   ALL OTHER METAL PARTS, GOLD, ASTM-B488
8. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE-50 OHMS
   FREQUENCY RANGE-DC TO 12.4 GHz
   VOLTAGE RATING- 500 VOLTS RMS

GSD

REVISIONS	
ISSUE	CHANGES

SCALE	6:1
APPROX SURFACE AREA	
USED ON	
REF:	E-20422, EQR 933

PLUG, SMA

DRAWN	DRK	DATE	08/07/06
DESIGN	DRK	DATE	08/07/06
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

875-116-9