
This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0039032069
Status: Active
Overview: standard_062
Description: 1.57mm (.062") Diameter Standard .062" Pin and Socket Receptacle Housing, 6 Circuits, Without Mounting Ears



Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-1625-010 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	1625
Comments	Polarized to Mating Part
Overview	standard_062
Product Name	Standard .062"

Physical

Breakaway	No
Circuits (maximum)	6
Circuits Detail	2x3
Color - Resin	Natural
Flammability	94V-2
Gender	Receptacle
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	3
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.145 In
Pitch - Mating Interface (mm)	3.68 mm
Pitch - Term. Interface (in)	0.145 In
Pitch - Term. Interface (mm)	3.96 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical

Current - Maximum per Contact	5A

Material Info

Old Part Number	1625-06R1

Reference - Drawing Numbers

Packaging Specification	SPK-1625-001
Product Specification	PS-1625-010, RPS-1625-001
Sales Drawing	SD-1625-06R*

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
1625Series

Mates With
1625 Plug


Use With
Female Crimp Terminals 1561Link:4559 , 4529 , 2190 , 2189 , 1787 , 1855 . Male Crimp Terminals 1560 , 1786 , 1854. 1778 Male PC Tail Terminals. 1779 Female PC Tail Terminals


This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


DWG. NO. SD-1625-06R*


:MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

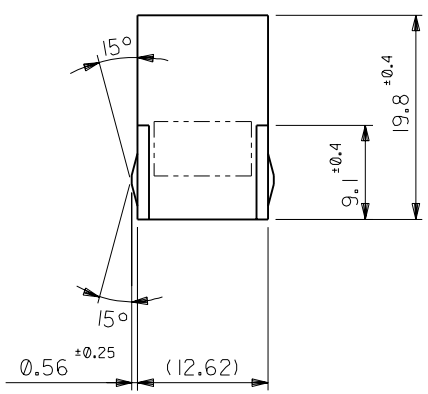




パネル取付耳（表参照）
MTG. EARS(SEE CHART)

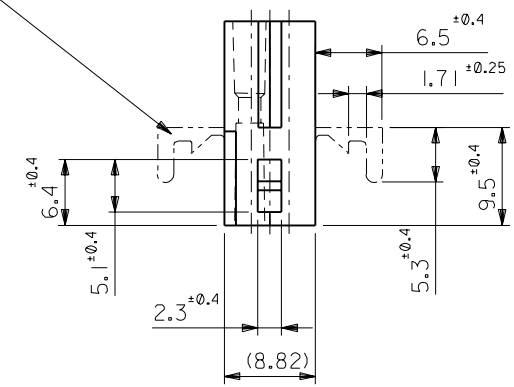

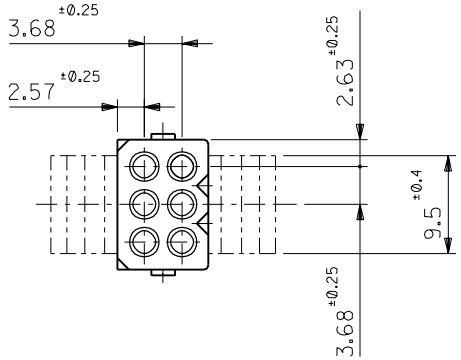



パネル取付穴寸法（厚さ　1．52最大）
RECOMMENDED PANEL HOLE DIMENSION(THK. 1.52 MAX.)

注記
NOTES

1．材質：ナイロン66，94V−2
MATERIAL:NYLON66,94V-2

2．（　　）内寸法は参考値
DIMENSIONS IN ( ) ARE REFERENCE

1625-06R1	39-03-2069	無 WITHOUT
1625-06R	39-03-2068	有 WITH
ENG. NO.	PART NO.	MTG. EARS

一般公差 GENERAL TOLERANCES	
角度 ANGLE	±3°
30 以上 OVER	±0.3
10 以上 OVER 30 未満 UNDER	±0.25
10 未満 UNDER	±0.2

記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
G	再作図 REDRAWN (JC70305)	h.i M.F	'96/07/02

材料 MATERIAL	図中参照 REFER TO DRAWING
仕上げ FINISH	
適用電線範囲 WIRE RANGE	
被覆外径 INS. RANGE	
DRAWN BY '96/07/02	H.IIJIMA
CHK'D BY '96/07/02	M.FUKUSHIMA
APP'D BY '96/07/02	M.ENOMOTO
尺度 SCALE	2 : 1

MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM

TITLE 名称
.062 DIA. 6 CIRCUIT RECEPT. HOUSING

DWG. NO. SD-1625-06R*

REV G

1625.S37

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス（株）の所有する情報を含むもので当社の許可なく複製を禁止する。

EN-0IC(032)MXJ-32