

AVC5000

Integrated Dual 3D Video Format Converter

General Description

The highly integrated AVC5000 dual 3D adaptive video converter accepts standard and high-definition baseband analog and digital video inputs and processes them for display in single or multiple windows on the television screen. Standard video formats up to 1080p resolution with a 60 Hz frame rate are supported. The converter is comprised of two main blocks—a universal front-end and a dual-channel display processor. The universal front-end accepts standard- and high-definition video formats, PC graphics formats and DVI signals, and decodes the signals into component video or RGB. Any two outputs from the universal front-end can be selected for the dual-channel display processor. The dual 3D architecture features two 3D decoders, two 3D noise reducers, two 3D deinterlacers, two high-order scalars for size and aspect ratio scaling, luma and chroma enhancement, frame-rate-conversion, adaptive contrast enhancement, multi-picture functions (PIP/PAP/POP) including side-by-side display of two full-quality images on a wide screen, intelligent color remapping and overlay of a bit mapped on-screen-display (OSD). The output signal formats include analog RGB or YPbPr for CRT displays and TTL or LVDS for flat panel or microdisplay.

Features

Inputs

- Five CVBS
- Three Y/C
- One standard- or high-definition component

- One high-definition component
- One VGA/HD
- One SCART (RGB) with fast blank/HD component
- One DVI-HDCP
- Two 24-bit digital flexiport ports, each configurable as RGB, Y/C or ITU-R BT656

Outputs

- Supports standard video formats up to 1080p resolution with a 60 Hz frame rate
- One 24-bit TTL configurable as ° 24-bit RGB ° 20-bit Y/C
- Dual channel LVDS, configurable for 6-, 8- or 10-bit panels, including interlaced (AliS) PDP
- Triple 10-bit DACs rated at 250 MHz
- One ITU-R BT656 for MPEG or video encoders
- One analog CVBS Monitor Out (pass through)


Packaging

- 544-ball PBGA (35 mm, 1 mm ball pitch)

Applications

- Digital televisions
- Integrated HDTV televisions
- Audio video receivers

Simplified Block Diagram

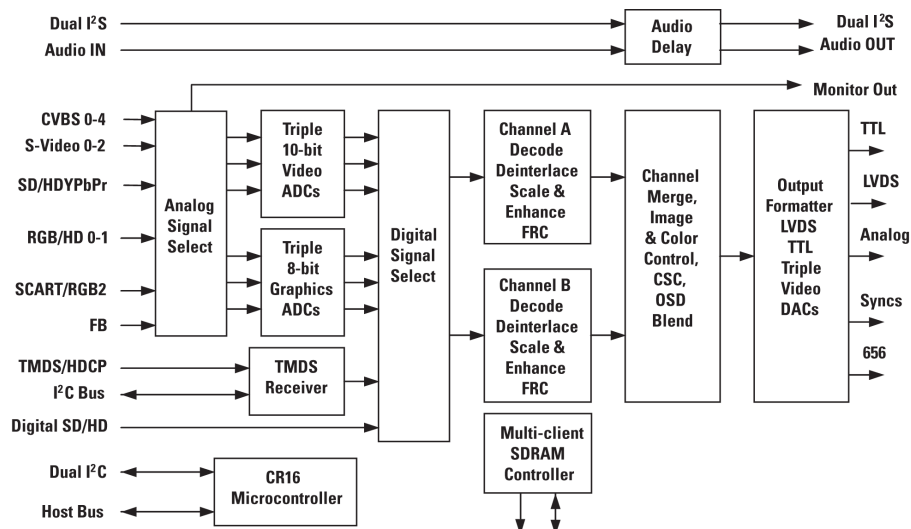


20154001

Functions

- Three A/D converters for graphics, SCART and standard- or high-definition component video
- Three A/D converters for NTSC/PAL/ SECAM CVBS, S-Video and standard definition component video
- Max input video resolution up to 1920x1080 @ 60p
- Max input graphics resolution up to UXGA - 1600x1200 @ 60Hz (165 MHz)
- WUXGA graphics (1920x1200) can be supported using external 205 MHz A/D converters
- Dual NTSC/PAL/SECAM decoders with 3D Y/C separation (NTSC and PAL) with auto-format detection and VBI slicing and decoding
- Dual 3D spatio-temporal noise reduction for standard- and high-definition video
- Dual 3D deinterlacing for standard- and high-definition video
- Two scalers for full PIP/POP/PAP with video or graphics inputs
- Up to 16 tiled freeze-frame PIP images in channel-scan mode
- 2D luma and horizontal chroma edge enhancement
- Advanced frame-rate-conversion
- Interlaced (field) or progressive (frame) output options
- Maximum output resolution of 1920x1080 @ 60p (148.5 MHz) or 1920x1200 @ 60p (191 MHz)
- Multi-plane OSD functions: 2D bit mapped OSD engine, character OSD, HW sprite
- Support for external OSD: analog SD via SCART interface or digital at output resolution via digital input interface
- Dual channel PCM audio delay compensation
- Adaptive contrast enhancement
- Intelligent color remapping
- PWM backlight control for LCD panels
- Embedded RISC processor

Physical Dimensions inches (millimeters) unless otherwise noted

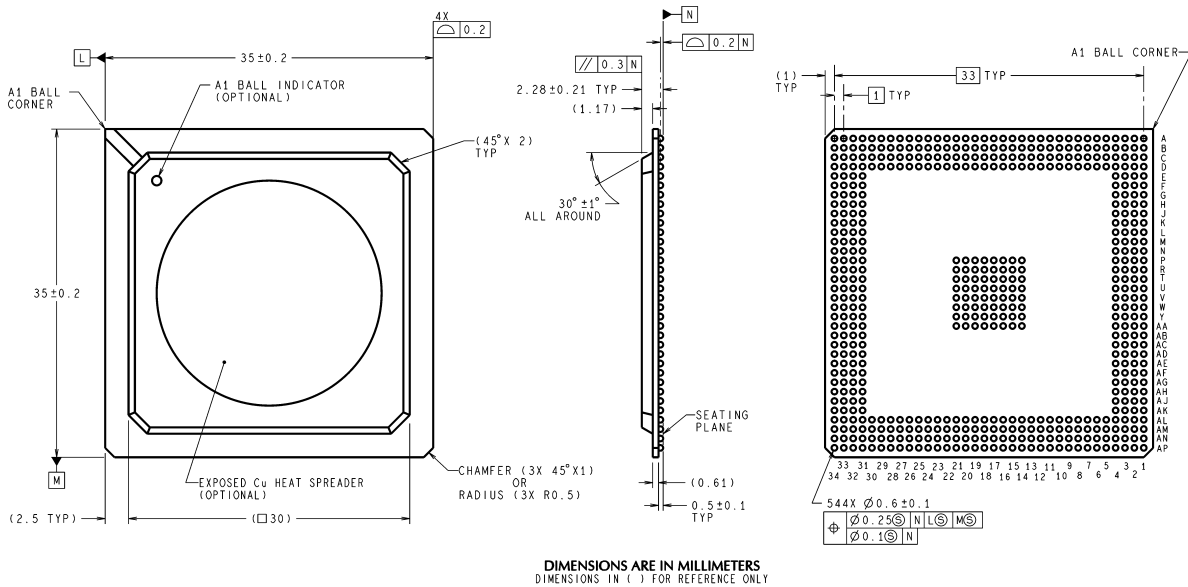

UFJ544A (Rev A)

544 pin PBGA Package

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560