


Tantalum, MnO₂ Tantalum, High Temperature, T499, 22 uF, 10%, 16 V, 7343, SMD, MnO₂, Molded, Hi-Temp, 175C, Auto, AEC-Q200, N/A, 800 mOhms, Height Max = 3.1mm

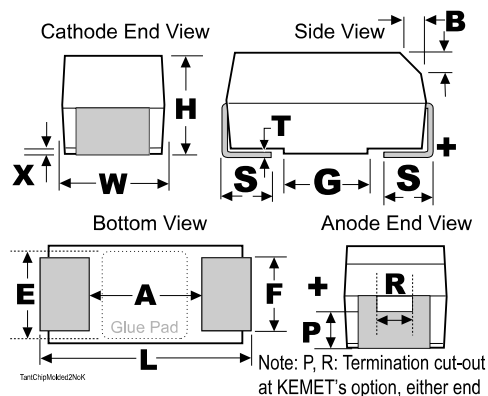

General Information

Dielectric:	MnO ₂ Tantalum
Style:	SMD Chip
Series:	T499
Description:	SMD, MnO ₂ , Molded, Hi-Temp, 175C, Auto, AEC-Q200
Features:	Automotive, 175C
RoHS:	Yes
Termination:	Tin
Approvals:	AEC-Q200
AEC-Q200:	Yes

Dimensions

Footprint	7343
L	7.3mm +/-0.3mm
W	4.3mm +/-0.3mm
H	2.8mm +/-0.3mm
T	0.13mm REF
S	1.3mm +/-0.3mm
F	2.4mm +/-0.1mm
A	3.8mm MIN
B	0.5mm +/-0.15mm
E	3.5mm REF
G	3.5mm REF
P	0.9mm REF
R	1mm REF
X	0.1mm +/-0.1mm

Specifications

Capacitance:	22 uF
Capacitance Tolerance:	10%
Voltage DC:	16 VDC (85C), 12.44 VDC (125C), 5.3 VDC (175C)
Temperature Range:	-55/+175C
Dissipation Factor:	6% 120Hz 20C
Failure Rate:	N/A
Resistance:	800 mOhms (100kHz)
Current:	433 mAmps (100kHz 25C), 389.7 mAmps (85C), 86.6 mAmps (175C)
Leakage Current:	3.5 uAmps (5min 20C)

Packaging Specifications

Weight:	446.84 mg
Packaging:	T&R, 178mm
Packaging Quantity:	500