


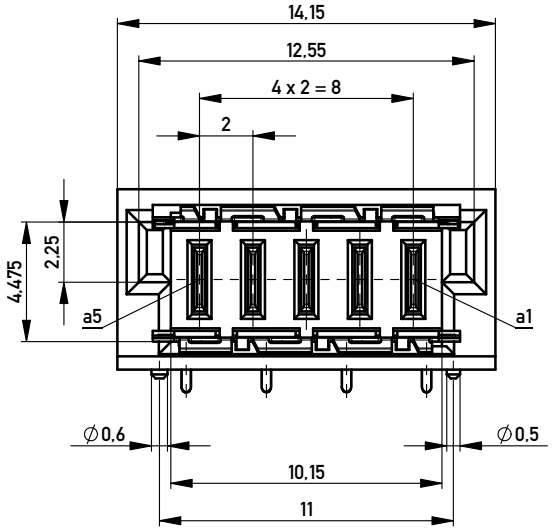


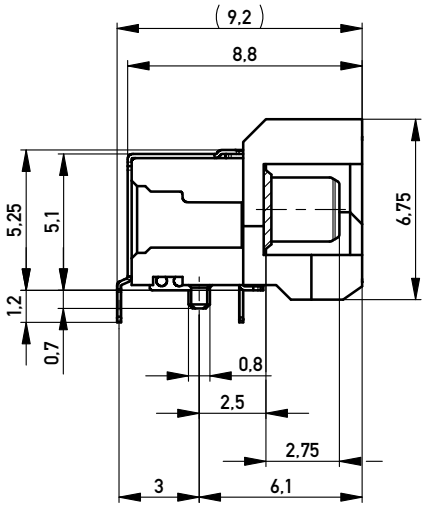


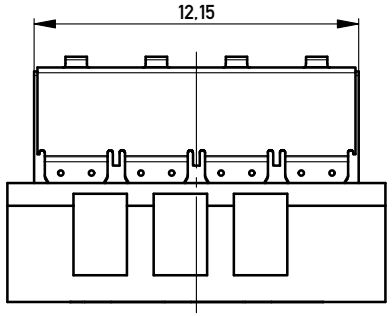


Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 400 Stück
Packaging unit: 400 pcs



Abspulrichtung - *Reel off Direction*

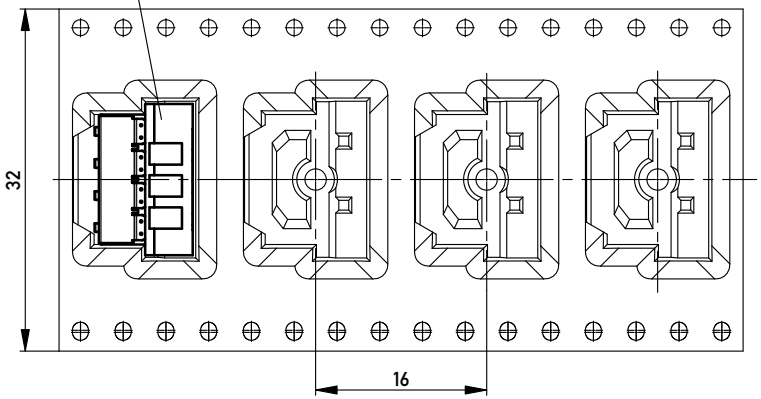

Leiterplatten-Layout Vorschlag / *PCB-Layout Proposal*

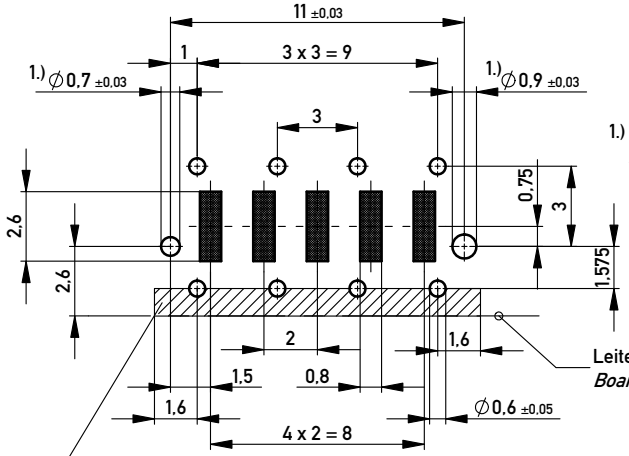

1.) Durchmesser des Bohrers /
Drill tool

Leiterplattenkante
Board edge

Schirmblechauflagefläche berücksichtigen,
keine Durchkontaktierungen oder Leitungen möglich!
Consider shielding contact area, no via´s or traces possible!

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

BlindMate SMD/THR

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:	Tolerances: All Dimensions in mm	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation: MSpeed Messerl. 90° PM / *MSpeed male 90° PM*	
c / Index	16.04.2013 / Date	ERNI www.ERNI.com	364704 / I / A3
			Class MSPPM